

New Roads and Street Works Act 1991

Specification for the Reinstatement of Openings in Roads

Fifth Edition (Scotland)

May 2023

Approved by the Scottish Ministers under Section 130 of
the New Roads and Street Works Act 1991



THE SCOTTISH
ROAD WORKS
COMMISSIONER



Contents

Contents	3	
Foreword	15	
Definitions	17	
S0	Preamble to the Specification	20
S0.1	General	20
S0.2	Outline of the specification	20
S0.3	Outline of the Appendices	21
S0.4	Outline of the Notes for Guidance	21
S0.5	Using the Specification and Appendices to undertake the correct reinstatement	22
S1	Operational Principles	24
S1.1	General	24
S1.2	Guarantee Period.....	25
S1.3	Road Categories	26
S1.4	Footway, Footpath and Cycle Track Categories	28
S1.5	Excavation and Trench Categories	29
S1.6	Alternative Options.....	29
S1.7	Immediate Works	30
S1.8	Apparatus within Carriageway, Footway and Cycle Track Structures	30
S1.9	Geosynthetic Materials, Geotextiles and Reinforcement Grids	32
S1.10	Trees.....	32
S1.11	Conciliation and Arbitration	32
S1.12	Waste.....	33
S1.13	Fleet (Plant and Vehicles).....	33
S2	Performance Requirements	34
S2.1	General	34
S2.2	Surface Profile	36
S2.3	Fixed Features.....	40

S2.4	Surface Regularity	44
S2.5	Settlement.....	45
S2.5.1	Cumulative Settlement.....	46
S2.6	Skid Resistance	47
S2.6.1	General	47
S2.6.2	Texture Depth	48
S2.6.3	Polished Stone Value (PSV)	51
S2.6.4	Aggregate Abrasion Value (AAV).....	53
S2.7	Sampling and Testing	54
S2.8	Bad Ground.....	54
S2.9	Cracking.....	55
S2.9.1	Interface Cracking.....	55
S2.9.2	Cracking Beyond Reinstatement Limits	55
S2.10	Works in deteriorated or distressed areas	56
S3	Excavation.....	58
S3.1	Breaking the Surface	58
S3.2	Excavation	58
S3.3	Excavated Material	59
S3.4	Side Support	59
S3.5	Drainage	60
S3.6	Shallow or Aborted Excavations	60
S3.7	Trenchless Pipelaying.....	61
S4	Surround to Apparatus.....	63
S4.1	General	63
S5	Backfill	64
S5.1	Backfill Material Classification.....	64
S5.1.1	General	64
S5.1.2	Class A – Graded Granular Materials	64
S5.1.3	Class B – Granular Materials	64
S5.1.4	Class C – Cohesive/Granular Materials	64
S5.1.5	Class D – Cohesive Materials.....	64
S5.1.6	Class E – Unacceptable Materials	65

S5.1.7	Foamed Concretes for Reinstatements (FCRs)	65
S5.1.8	Hydraulically Bound Mixtures (HBM)	66
S5.2	Alternative Reinstatement Materials	67
S5.3	Additional Requirements	67
S5.3.1	Frost Heave Susceptibility	67
S5.3.2	Maximum Particle Size	68
S5.3.3	Surround to Apparatus as Backfill.....	68
S5.3.4	Protective Measures to Apparatus.....	68
S5.3.5	Chalk.....	68
S6	Flexible and Composite Roads.....	69
S6.1	Reinstatement Methods	69
S6.1.1	General	69
S6.1.2	Method A – All Permanent Reinstatement	70
S6.1.3	Method B – Permanent Binder Course Reinstatement	70
S6.1.4	Method C – Permanent Base Reinstatement.....	70
S6.1.5	Method D – Permanent Sub-base Reinstatement.....	71
S6.2	Sub-base Reinstatement	71
S6.2.1	General	71
S6.3	Base Reinstatement.....	72
S6.3.1	General	72
S6.3.3	Base Equivalence	72
S6.3.4	Modular Materials within the Excavation.....	73
S6.3.5	Alternative Reinstatement Materials	74
S6.4	Surface Reinstatement	75
S6.4.1	General	75
S6.4.2	Hot Rolled Asphalt (HRA) Surface	75
S6.4.3	Stone Mastic Asphalt (SMA) Surface	75
S6.4.4	Thin Surface Course Systems	76
S6.4.5	Asphalt Concrete Surface Course Materials	77
S6.4.6	Asphalt Concrete Binder Course Materials	77
S6.4.7	Other Bituminous Materials.....	77
S6.4.8	Surface Treatments	81

S6.4.9	Coated Chippings	81
S6.4.10	Composite Roads	82
S6.4.11	Single Course Construction	82
S6.4.12	Small Excavations, Narrow Trenches and Access Chamber Covers	82
S6.4.13	Large Diameter Cores (Core & Vac excavation and reinstatement)	82
S6.5	Base and Edge Preparation	88
S6.5.1	Base Preparation	88
S6.5.2	Edge Preparation	88
S6.6	Tolerances	94
S7	Rigid and Modular Roads.....	95
S7.1	Reinstatement Methods	95
S7.1.1	General	95
S7.1.2	Method A – All Permanent Reinstatement	96
S7.1.3	Method B – Permanent Binder Course Reinstatement	96
S7.1.4	Method C – Permanent Base Reinstatement.....	96
S7.1.5	Method D – Permanent Sub-base Reinstatement.....	96
S7.1.6	Method E – Permanent Reinstatement incorporating Interim Surface Overlay	97
S7.2	Sub-base Reinstatement	97
S7.2.1	General	97
S7.2.2	Small Reinstatements	98
S7.2.3	Alternative Reinstatement Materials	98
S7.3	Concrete Road Slab Reinstatement.....	98
S7.3.1	General	98
S7.3.2	Concrete Specification	98
S7.3.3	Joints	99
S7.3.4	Membranes	99
S7.3.5	Texture Depth	99
S7.3.6	Opening to Traffic	99
S7.4	Edge Support and Preparation.....	99
S7.4.1	Edge Support.....	100

S7.4.2	Edge Preparation	101
S7.5	Reinforcement.....	102
S7.6	Overlays.....	102
S7.6.1	General	102
S7.6.2	Surface Reinstatement	103
S7.7	Modular Roads.....	103
S7.7.1	General	103
S7.7.2	Method A – All Permanent Reinstatement	104
S7.7.3	Method B – Permanent Sub-base Reinstatement.....	104
S7.7.4	Sub-base Reinstatement	104
S7.7.5	Base Reinstatement.....	104
S7.7.6	Surface Reinstatement	105
S7.8	Tolerances	105
S8	Footways, Footpaths and Cycle Tracks.....	106
S8.1	Reinstatement Methods	106
S8.1.1	General	106
S8.1.2	Method A – All Permanent Reinstatement	106
S8.1.3	Method B – Permanent Binder Course Reinstatement	106
S8.1.4	Method C – Permanent Base Reinstatement.....	107
S8.1.5	Method D – Permanent Sub-base Reinstatement.....	107
S8.2	Sub-base and Binder Course Reinstatement.....	108
S8.2.1	General	108
S8.2.2	Small Reinstatements	108
S8.2.3	Alternative Reinstatement Materials	108
S8.2.4	Reinstatements Adjacent to Roads.....	108
S8.3	Surface Reinstatement	109
S8.3.1	General	109
S8.3.2	High Duty and High Amenity Areas.....	109
S8.3.3	Areas Surfaced with Asphalt Concrete	109
S8.3.4	Other Asphalt Areas.....	110
S8.3.5	Areas Constructed in Concrete.....	110
S8.3.6	Modular Footways, Footpaths and Cycle Tracks	111

S8.3.7	Edge Requirements	112
S8.3.8	Special Materials.....	114
S8.4	Vehicular Trafficking	114
S8.4.1	Commercial Access	114
S8.4.2	Domestic Access	114
S8.4.3	Other Trafficking	115
S8.5	Tolerances	115
S9	Verges and Unmade Ground.....	116
S9.1	General	116
S9.2	Adjacent Road Structures	116
S9.3	Cultivated Areas.....	117
S9.4	Grassed Areas.....	117
S9.5	Verges, Ditches and Drainage Courses.....	118
S10	Compaction Requirements	119
S10.1	Introduction	119
S10.2	Compaction of Materials	119
S10.2.1	General	119
S10.2.2	Unbound Granular and Cohesive Materials	119
S10.2.3	Alternative Reinstatement Materials	120
S10.2.4	Bituminous Materials.....	120
S10.2.5	Cementitious Materials	121
S10.2.6	Modular Surfacing Materials	122
S10.3	Equipment Operation and Restrictions	122
S10.3.1	General	122
S10.3.2	Hand Rammers.....	123
S10.3.3	Percussive Rammers.....	123
S10.3.4	Vibrotampers.....	123
S10.3.5	Vibrating Rollers.....	124
S10.3.6	Vibrating Plate Compactors	125
S10.3.7	Other Compaction Equipment.....	125
S11	Ancillary Activities.....	126
S11.1	Traffic Signs, Road Markings, Studs and Verge Markers	126

S11.1.1	General	126
S11.1.2	Traffic Signs, Studs and Verge Markers	127
S11.1.3	Road Markings.....	127
S11.2	Street Furniture and Special Features	129
S11.3	Traffic Sensors, etc.	129
S11.4	Water-related Matters	129
S11.4.1	Sewers, Drains and Tunnels.....	129
S11.4.2	Water Egress (Road Surface and Utility Apparatus).....	130
S11.5	Ironwork and Apparatus.....	130
S11.5.1	Access Covers, Frames and Surround	130
S11.6	Test Holes.....	131
S11.6.1	General	131
S11.6.2	50 mm Diameter or Less.....	132
S11.6.3	50 to 150 mm Diameter	133
S11.7	Overbanding	133
S12	Remedial Works	135
S12.1	General	135
S12.2	Safety Requirements	135
S12.3	Repair of Cracking	135
S12.3.5	Cracking within High Friction Surfacing.....	136
S12.4	Repair of Settlement beyond Reinstatement Limits	137
S12.5	Repair of Other Significant Defects.....	137
S13	Narrow Trenching	138
S13.1	Definitions.....	138
S13.2	General	138
S13.3	Encounters with Rock	139
S13.4	Depth of Cover.....	140
Appendix A1	Backfill Materials.....	141
A1.1	Class A – Graded Granular Materials	141
A1.2	Class B – Granular Materials	141
A1.3	Class C – Cohesive/Granular Materials	141
A1.4	Class D – Cohesive Materials.....	142

A1.5	Class E – Unacceptable Materials	142
A1.6	Field Identification Tests	143
Appendix A2	Key to Materials	148
A2.1	Introduction	148
A2.2	Hot Rolled Asphalt (HRA) Mixtures.....	149
A2.3	Stone Mastic Asphalt (SMA) Mixtures and Thin Surface Course Systems (TSCS)	152
A2.4	Asphalt Concrete Mixtures.....	154
A2.5	Cold-lay Surfacing Materials	156
A2.6	Flowable materials	157
A2.7	Structural Layer Thickness Tolerances.....	160
A2.8	Compacted Lift Thickness.....	162
A2.9	Bituminous Laying Temperatures	165
A2.10	Identification of Structural Layers.....	166
A2.11	Key to Materials	169
A2.12	Key to Reinstatement Methods.....	169
A2.13	Summarised Selection Process for Hot Lay Flexible Materials	172
Appendix A3	Reinstatement – Flexible Roads	173
Appendix A4	Reinstatement – Composite Roads.....	180
Appendix A5	Reinstatement – Rigid Roads	187
Appendix A6	Reinstatement – Modular Roads	191
Appendix A7	Reinstatement – Footways, Footpaths and Cycle Tracks	195
Appendix A8	Compaction Requirements	199
A8.1	Granular, Cohesive and Cement Bound Materials.....	199
A8.2	Chalk Materials	199
A8.3	Bituminous Mixtures.....	199
Appendix A9	Alternative Reinstatement Materials (ARMs)/Alternative Technologies (AT).....	201
A9.1	Introduction	201
A9.2	General Requirements for ARMs	203
A9.3	Structural Materials for Reinstatements (SMRs).....	205
A9.4	Outline scheme for approval trials.....	209

Appendix A10 Not Used	211
Appendix A11 Bitumen Binder Equivalence	212
A11.1 Introduction	212
A11.2 Base and Binder Course Materials	212
Appendix A12 Reinstatement of Modular Surface Layer	214
A12.1 Interim Reinstatement.....	214
A12.2 Permanent Reinstatement	214
A12.3 Provision of Replacement Modules.....	219
A12.4 Pre-existing Surface Damage Outside Limits of Undertaker's Works	219
NG0 Notes for Guidance	221
NG0.1 Preamble to the Specification	221
NG1 Introduction	222
NG1.1 General	222
NG1.2 Guarantee Period.....	223
NG1.3 Road Categories	223
NG1.4 None	226
NG1.5 None	226
NG1.6 Alternative Options.....	226
NG1.7 Immediate Works	227
NG1.8 Apparatus Within the Road Structure.....	228
NG1.9 Geosynthetic Materials, Geotextiles and Reinforcement Grids	228
NG1.10 Trees.....	228
NG1.11 None	231
NG2 Performance Requirements	232
NG2.1 None	232
NG2.2 Surface Profile	232
NG2.3 Fixed Features.....	234
NG2.4 Surface Regularity	235
NG2.5 Structural Integrity.....	235
NG2.6 Skid Resistance	235
NG2.7 None	237

NG2.8	None	237
NG2.9	None	237
NG2.10	None	237
NG3	Excavation	238
NG3.1	Breaking the Surface	238
NG3.2	Excavation	238
NG3.3	None	238
NG3.4	Side Support	238
NG3.5	None	239
NG3.6	None	239
NG3.7	None	239
NG4	Surround to Apparatus.....	240
NG4.1	General	240
NG5	Backfill	241
NG5.1	Backfill Material Classification.....	241
NG5.2	None	241
NG5.3	Additional Requirements	241
NG6	Flexible and Composite Roads.....	244
NG6.1	None	244
NG6.2	Sub-base Reinstatement	244
NG6.3	Base Reinstatement.....	244
NG6.4	Surface Reinstatement	245
NG6.5	Base and Edge Preparation	247
NG6.6	None	252
NG7	Rigid and Modular Roads.....	253
NG7.1	Reinstatement Methods	253
NG7.2	None	253
NG7.3	None	253
NG7.4	None	253
NG7.5	None	253
NG7.6	None	253
NG7.7	Modular Roads.....	254

NG7.8	None	254
NG8	Footways, Footpaths and Cycle Tracks.....	255
NG8.1	None	255
NG8.2	Sub-base and Binder Course Reinstatement.....	255
NG8.3	Surface Reinstatement	255
NG8.4	None	257
NG8.5	None	257
NG9	Verges and Unmade Ground.....	258
NG10	Compaction Requirements	259
NG10.1	Introduction	259
NG10.2	Compaction of Materials	259
NG10.3	Equipment Operation and Restrictions	260
NG11	Ancillary Activities.....	266
NG11.1	Traffic Signs, Road Markings, Studs and Verge Markers	266
NG11.2	Street Furniture and Special Features	266
NG11.3	Traffic Sensors etc.	267
NG11.4	Water-related Matters	267
NG11.5	Ironwork and Apparatus.....	268
NG11.6	None	269
NG11.7	Overbanding	269
NG12	Remedial Works	270
NGA1	Backfill Materials.....	271
NGA2	Key to Materials	272
NGA2.1	Introduction	272
NGA2.2	Hot Rolled Asphalt (HRA) Mixtures.....	272
NGA2.3	Stone Mastic Asphalt (SMA) Mixtures.....	272
NGA2.4	Not Used.....	275
NGA2.5	Not Used.....	275
NGA2.6	Not Used.....	275
NGA2.7	Not Used.....	275
NGA2.8	Not Used.....	275
NGA2.9	Not Used.....	275

NGA2.10	Not Used.....	275
NGA2.11	Not Used.....	276
NGA2.12	Not Used.....	276
NGA3	Not Used	277
NGA4	Not Used	277
NGA5	Not Used	277
NGA6	Not Used	277
NGA7	Not Used	277
NGA8	Compaction Requirements	278
NGA8.1	Not Used.....	278
NGA8.2	Not Used.....	278
NGA8.3	Bituminous Mixtures.....	278
NGA9	Alternative Reinstatement Materials (ARMs).....	280
NGA9.1	General	280
NGA10	Not Used	281
NGA11	Not Used	281
NGA12	Reinstatement of Modular Surface Layers	282
NGA12.1	General	282
NGA12.2	Examples of Cement or Concrete Infills.....	282
NGA12.3	Examples of Reinstatement of Modular Patterns.....	282
NGA12.4	Provision of Replacement Modules.....	289

Foreword

The road network contains an array of essential underground services which have come to form an integral part of our modern society – water, sewerage, energy supply and telecommunications are all accommodated on and under our roads.

These essential services need to be maintained and upgraded and Section 130 of the New Roads and Street Works Act 1991 (NRSWA) requires an Undertaker executing road works, when reinstating the road, to comply with whatever specification may be prescribed for materials to be used and standards of workmanship to be observed. This fifth edition of the Specification for the Reinstatement of Openings in Roads (The Code) is issued under Section 130 of NRSWA.

Since the Code was last updated in early 2019, the climate emergency has come to the fore and governments have recognised the need to reduce carbon emissions and achieve carbon neutrality through a just transition.

The transformation of Scotland's society and economy to net zero emissions can by no means be delivered by Government alone. It will require a national effort across all sectors - public, private and third – and from communities and individuals across Scotland. We must therefore ensure that our transition to net zero is collaborative and delivered in partnership

This Code aims to support that transition in several ways:

- Inclusion of an extended six-year guarantee period for most reinstatements to encourage undertakers to improve durability and quality of their reinstatements.
- Extension of the choice of materials for use in footways to help minimise wastage of materials and vehicular trips to and from sites.
- Introduction of a revised trials process which will allow innovation in materials and practices to be more efficiently assessed and rolled out nationally.

The Code incorporates the requirements of The Road Works (Reinstatement) (Scotland) Regulations 1992, SI 1992 No.1674 (S.161) as amended;

This Code has been produced by a collaborative working group comprising representatives of roads authorities and utilities with support from the staff of the Scottish Road Works Commissioner.

The Code has been endorsed by the Roads Authorities and Utilities Committee Scotland and the Scottish Road Works Commissioner and is issued by The Scottish Ministers under Section 130 of NRSWA as the statutory Code of Practice for use in Scotland only.

The 'Notes for Guidance' section does not form part of the statutory code. This version of the Code of Practice will come into operation on 1 October 2023 and replaces the fourth edition in Scotland.

Definitions

Aggregate Abrasion Value (AAV)	the standard measure of an aggregate's resistance to abrasion.
ARM	Alternative Reinstatement Materials
Authority	unless otherwise stated, in this Specification and Definitions, 'the Authority' refers to the Authority as defined in The Act.
Bond Coat	Bond coats are proprietary materials certified by Performance Acceptance Scheme, generally formulated to enable heavier application rates than are possible with tack coats and to provide greater cohesion between bituminous layers.
CBGM	Cement Bound Granular Material.
CD	Highway Design Standard – A section of the Design Manual for Roads and Bridges (DMRB) issued by the Stationery Office – Standards for Highways.
CBR	California Bearing Ratio: a measure of the load bearing strength of a granular or unbound material.
Composite construction	a structure where the road is composed of lean mix concrete or other cement bound granular material, normally with bituminous surfacing layers.
Cut-back	see 'Trimback'.
Cycle track	a road where the public right of passage is by pedal cycle only, or by pedal cycle and foot only.
Deep openings	all excavations and trenches in which the depth of cover over the buried apparatus is greater than 1.5 metres. Trenches with a depth of cover that is intermittently more than 1.5 metres for lengths of less than 5 metres are not deemed to be deep openings.
Emergency works	works whose execution at the time when they are executed is required in order to put an end to, or to prevent the occurrence of, circumstances then existing or imminent for which the person responsible for the works believes on reasonable grounds to be existing or imminent which are likely to cause danger to persons or property.
Flexible construction	a structure where the Base is composed of either bituminous material or granular material, or a combination thereof.
Footpath	a way over which the public have a right of passage on foot only, not being a footway.
Footway	a way comprised in a road, which also comprises a carriageway, being a way over which the public have a right of passage on foot only.
Geosynthetic materials	a generic term describing a product at least one of whose components is made from a synthetic or natural polymer, in the form of a sheet or a 3D structure, used in contact with soil and/or other materials in geotechnical and civil engineering applications.
HBM	Hydraulically Bound Mixtures.
Immediate Reinstatement	works comprising the orderly replacement of excavated material reasonably compacted to finished surface level, usually with a cold-lay

	surfacing.
Interim reinstatement	the orderly placement and proper compaction of reinstatement layers to finished surface level, including any temporary materials. Also including the ancillary activities in Section S11.1.1 before opening the works to traffic
Intervention	restoration of a reinstatement which does not comply with the performance standards, to a condition complying with those standards.
LA	Los Angeles Abrasion Value – measure of the resistance to abrasion of an aggregate.
Major projects	standard works which have been identified specifically in the Undertaker’s annual operating programme or which, if not specifically identified in that programme, are normally planned at least 6 months in advance of works commencing.
Modular construction	a structure where the surface is composed of setts, concrete blocks, brick pavers or paving slabs etc. laid on appropriate sub-construction.
msa	million standard axles.
Narrow trenches	Narrow trenches: all trenches of surface width between 100 mm - 300 mm (75 mm – 300 mm with authority approval), with a surface area greater than 2 square metres.
Pen	the penetration grade of a bituminous binder.
Permanent reinstatement	the orderly placement and proper compaction of reinstatement layers up to and including the finished surface level. Also including the surface requirement in Section S6.4 and ancillary activities in Section S11 with permanent materials
Permitted	An allowable alternative to the preferred material – see also ‘Preferred’.
Preferred	The favoured choice between a number of options – see also ‘Permitted’.
Product Acceptance Scheme	Product Acceptance Scheme in accordance with 100 Series of the MCHW, Clauses 104.15 and 104.16 (such as British Board of Agrément certificates).
PSV	Polished Stone Value.
PTV	Pendulum Test Value – a measure of the frictional properties of a surface using a Pendulum test device.
Rigid construction	a structure where the surface slab also performs the function of the Base; is of pavement quality concrete and may be reinforced. Under certain circumstances, as defined in Section S7 , a rigid road that has been overlaid may be deemed to be a composite construction for the purpose of this Specification.
Road	<p>the whole or any part of any of the following, whether or not there is over it a public right of passage and whether it is for the time being formed as a way;</p> <p>any way (other than a substitute road made under section 74(1) of the Roads (Scotland) Act 1984 or a waterway)</p> <p>This includes any square or court.</p> <p>and for the avoidance of doubt includes land on the verge of a road or between two carriageways. Where a road passes over a bridge or through a tunnel, references to the road include that bridge or tunnel</p>

	(NRSWA section 107 etc.).
Road & footway structure	includes the surface course, binder course, base and sub-base.
Road Manager	as referenced in NRSWA section 108 (4).
SHW	Specification for Highway Works, published as Volume 1 of the Manual of Contract Documents for Highway Works (MCHW1) Standards for Highways.
Small excavations	all openings with a surface area of 2 square metres or less. For the purposes of this Specification, test holes up to 150 mm diameter are not excavations and shall be reinstated in accordance with the requirements of Section S11 .
SRV	Skid Resistance Value – a measure of the frictional properties of a surface using a Pendulum test device.
Stepped joint	the practice whereby the width of the reinstatement of the binder course and/or surface course is made wider than the reinstatement below it to provide higher resistance to water ingress.
Tack Coat	conventional bitumen emulsions conforming to BS EN 13108 classes C40B4 or C60B3 used to enhance the adhesion of the overlying bituminous layer which might be impaired due to minor dust problems or insufficient free bitumen on the surface of the layer to be overlaid.
The Act	unless otherwise stated in this Specification and Definitions, 'the Act' refers to the New Roads and Street Works Act 1991.
Traffic sign	has the same meaning as in the Road Traffic Regulation Act 1984.
Trim-line	the cut face that defines the outer edge of an excavation.
Trimback	the area between trim-lines excavated to permit adequate reinstatement.
TRL	Transport Research Laboratory.
UKAS	the organisation that has introduced a national scheme for the accreditation of laboratories used for the testing of materials.
Undertaker	unless otherwise stated in this Specification and Definitions, 'the Undertaker' refers to the Undertaker as defined in the Act and is the person in whom a statutory right to execute works is vested or permission under section 109 to execute road works.
Urgent works	works which fall short of emergency works but are of sufficient urgency to warrant immediate action either to prevent further deterioration of an existing situation or to avoid an Undertaker becoming in breach of a statutory obligation.
Verge	that part of the road outside of the carriageway, which may be slightly raised but is exclusive of embankment or cutting slopes, and generally grassed.
Wheel Tracking	A test to determine the resistance to deformation (rutting), primarily of surface courses.

S0 Preamble to the Specification

S0.1 General

S0.1.1 This Specification is a Code of Practice outlining a national standard applicable to all Undertakers when carrying out reinstatement as a part of executing road works. Broadly, the Specification and its appendices prescribe materials that may be used, the expected standards of workmanship and performance standards to be complied with at both interim and permanent reinstatement stages for the duration of the Guarantee Period (defined in Section [S1.2](#)).

S0.1.2 There is a strong focus in this Specification on sustainability by encouraging the first time completion of permanent reinstatements, material recycling and the re-use of materials to minimise the carbon footprint of the reinstatement operation.

S0.2 Outline of the specification

S0.2.1 The Specification 'S' Sections are logically ordered, reflecting what practitioners need to know before commencing works, what will be required in order to complete the works and the obligations upon Undertakers once the works are completed.

S0.2.2 Sections [S1](#) and [S2](#) respectively set out in advance of any reinstatements, the general parameters associated with reinstatements and the expected performance requirements.

S0.2.3 Sections [S3](#), [S4](#) and [S5](#) follow the normal sequence of operations carried out by Undertakers when breaking up or opening up the road and laying new or maintaining apparatus, namely, excavation, placing surround material to apparatus and the backfilling of the openings above the surround to apparatus to the underside of the specified unbound and bound material layers, which comprise the designed structure of the

reinstatement.

S0.2.4 Sections [S6](#) and [S7](#) set out the detailed requirements and permissible reinstatement methods for the bound materials in carriageways. Limitations on the use of preferred and permissible materials (more fully detailed in [Appendix A1](#) and [Appendix A2](#)) are described. Sections [S8](#) and [S9](#) similarly set out the requirements for reinstatements in footways and verges.

S0.2.5 Section [S10](#) sets out the fundamental requirements for compaction of all permissible reinstatement materials, including guidance as to the degree of compaction necessary to comply with the Code of Practice, thereby supporting the required end performance of the whole reinstatement.

S0.2.6 Sections [S11](#) and [S12](#) respectively cover ancillary activities which might be encountered during road works and the prescribed remedial measures in the event that the reinstatement is defective and/or causes settlement beyond the limits of the reinstatement. Section [S13](#) covers the requirements for narrow trenches.

S0.3 Outline of the Appendices

S0.3.1 The Appendices are an integral part of this Code of Practice, setting out significant amounts of technical detail, including the design of different reinstatements using materials and thickness specified in the Appendices. This reflects the various categories of surfaces normally encountered in reinstatements, which includes carriageways, footways and verges.

S0.3.2 Incorporation of this type of detail into the Specification 'S' Sections was considered likely to impede the general flow of those clauses. Whilst the Appendices stand alone as sections of the Code of Practice, in essence they complement the Specification 'S' Sections.

S0.4 Outline of the Notes for Guidance

S0.4.1 Where considered beneficial, Notes for Guidance sections complementary

to the Specification 'S' Sections and some of the Appendices have been included in the Code of Practice. However, Notes for Guidance are by definition notes or details which are thought to be useful to support practitioners to both understand and use the Specification and Appendices. They sit outside the Code of Practice and are not enforceable under law.

S0.5 Using the Specification and Appendices to undertake the correct reinstatement

S0.5.1 Specific to the reinstatement-related aspects within the Code of Practice, readers and practitioners will find reference to reinstatement materials in numerous parts of the Specification 'S' Sections and Appendices. These include:

- the overall class of materials, such as Hot Rolled Asphalts, Stone Mastic Asphalts, Asphalt Concretes and traditional Concretes used in some roads;
- different types of mixture within each class of material, such as Hot Rolled Surface Course and Hot Rolled Binder Course – these tend to relate to the relative position of the mixture within the overall reinstatement (generally the layer) and reflect the design function of the layer;
- different preferred (and permissible) mixtures for different layers;
- different thicknesses of mixture layers;
- specific requirements and limitations for surface courses.

Each of the above references has been intentionally assigned to different parts of the Code of Practice and it is essential that these are all taken into account when selecting the correct reinstatement design in a specific category of surface.

S0.5.2 The reinstatement of flexible roads (and footways) is particularly more complex at the reinstatement design selection stage. To assist

practitioners, [Figure S0.1](#) sets out the intended materials selection process for flexible (and composite) carriageways.

Figure S0.1 Flexible Reinstatement Material Selection Process

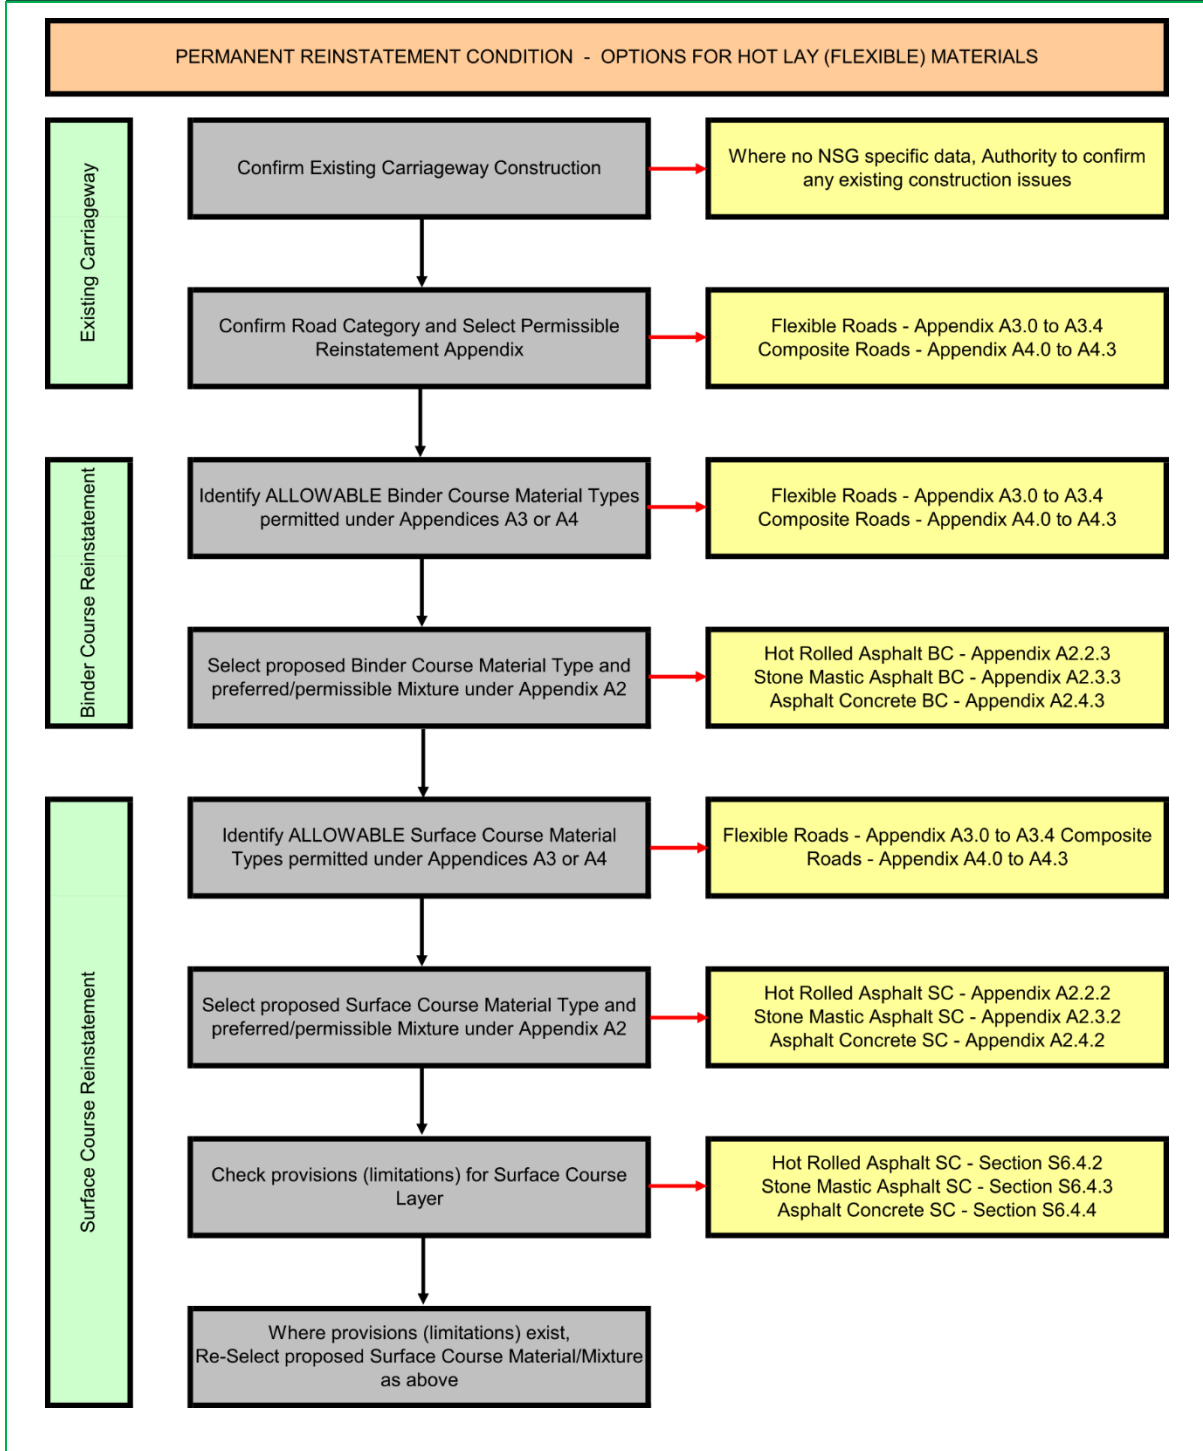


Figure S0.1

S1 Operational Principles

S1.1 General

S1.1.1 This Specification incorporates new terminology introduced under the European EN 13108 series of standards for asphalt, the term asphalt in this case referring to mixtures of bituminous binder and aggregate. These became effective in January 2008. Readers and practitioners should therefore be familiar with the new terms used in this Specification, as follows:

- a) “asphalt concrete” replaces the previous “coated materials to BS4987” (bituminous mixtures)
- b) “base” replaces the previous “base (roadbase)”

Readers and practitioners should note that reference to “asphalt” is not limited to “hot rolled asphalt”.

S1.1.2 An Undertaker executing road works shall carry out the excavation and reinstatement in accordance with this Specification. Where this Specification allows alternatives, the Undertaker shall select one of the permitted options. Regardless of which alternative is selected, the Undertaker shall guarantee the performance of the reinstatement to the relevant standards, for the relevant guarantee period.

S1.1.3 The reinstatement shall be carried out using a permitted method incorporating the highest degree of immediate permanent reinstatement appropriate, in the opinion of the Undertaker, to the prevailing circumstances.

S1.1.4 An interim reinstatement shall normally be made permanent within six months. This period may be extended, by agreement, for an additional six months. Throughout the period in which an interim reinstatement is in situ, the performance requirement within Section [S2](#) of this document applies.

S1.1.5 The requirements and standards in this Specification apply to roads which are maintainable or prospective public roads. In the case of all other roads, only those relevant parts of this Specification relating to “Surround to Apparatus” and “Backfill” shall apply. Surfacing layers, if any, shall be reinstated, as far as is reasonably practicable, to match the existing construction. In all cases, reinstatement must be undertaken to the reasonable satisfaction of the appropriate Authority.

S1.2 Guarantee Period

S1.2.1 The Undertaker shall ensure that the interim reinstatement conforms to the prescribed standards until the permanent reinstatement is completed, and that the permanent reinstatement conforms to the prescribed standards throughout the guarantee period.

S1.2.2 The guarantee period for permanent reinstatements completed prior to 1 October 2023 shall begin on completion of the permanent reinstatement and shall run for two years, or three years in the case of deep openings.

S1.2.3 The applicable guarantee period should be based on the date of the original reinstatement. Any remedials which resulted in a reset of the guarantee on a reinstatement first completed before 1 October 2023 would retain the 2/3 year guarantee.

S1.2.4 The guarantee period for permanent reinstatements completed from 1 October 2023 shall run for six years regardless of depth of reinstatement from the date of completion, unless included in [Table S1.1](#).

Table S1.1 Guarantee Period Exception List	
Reinstatement Item	Guarantee Period
Modular Carriageways	2 years
Verges, Cultivated Areas and Unmade Ground	12 months
High Friction / Coloured / Textured Surfacing*	2 years
Road Markings*	2 years

Table S1.1 – Guarantee Period Exception List

* The High Friction/Coloured/Textured Surfacing and Road Markings 2 year guarantee period only applies to those items. The full guarantee period still applies for the remainder of the reinstatement.

S1.2.5 It should be noted that completion of the permanent reinstatement, rather than the giving of information to the Authority that the reinstatement is completed, is the event that triggers the start of the guarantee period. It is the onus of the Undertaker to provide evidence of the date of completion of any given reinstatement for liability guarantee purposes.

However, where it is discovered at any time that a reinstatement has not been constructed to specification i.e. is not to the minimum depth, does not meet the air voids requirement or is the wrong material (normally identified following coring) then the Undertaker will have deemed not to have met its obligations under section 130 of the New Roads and Street Works Act 1991. In this case the guarantee period will not commence until the completion of the permanent reinstatement to the specification.

S1.3 Road Categories

S1.3.1 Roads are categorised by this Specification into five types, each with a limiting capacity expressed in millions of standard axles (msa) as shown in [Table S1.2](#).

Table S1.2 Road Categories	
Road Category	Traffic Loading
Type 0	Roads carrying over 30 up to 125 msa
Type 1	Roads carrying over 10 up to 30 msa
Type 2	Roads carrying over 2.5 up to 10 msa
Type 3	Roads carrying over 0.5 up to 2.5 msa
Type 4	Roads carrying up to up 0.5 msa

Table S1.2

- S1.3.2** Roads carrying more than 125 msa are not included in this Specification. Reinstatement designs for such roads shall be agreed between the Undertaker and the Authority, on an individual basis.
- S1.3.3** Road categories defined in [Table S1.2](#) are based on the expected traffic to be carried by each road over the next 20 years. Each Authority shall categorise its road network on this basis and the Undertaker shall use the most current information available from the Authority. Where an Authority does not classify its roads as required by this Specification, the Undertaker shall determine the classification of these roads, as necessary. The Undertaker shall make every effort to consult with the Authority in advance, and provide a copy of the classification to all parties concerned.
- S1.3.4** Valid traffic flows shall be assessed by accurately monitoring commercial vehicles in excess of 1.5 tonnes unladen weight. Traffic growth rates shall be determined from the average of at least three separate assessments carried out over at least three years. Where traffic growth rates are expected to increase significantly, as a result of changing traffic patterns, only predictions generated from a recognised planning process may be used. A zero traffic growth rate shall be assumed until accurate information is available.
- S1.3.5** Roads that have been constructed within the past twenty years, particularly new housing estate roads, may have been designed for additional Design Life in line with DMRB Standards. In these cases, the

authority must notify the undertaker, in advance of the works, and the undertaker must reinstate the excavation to match the existing construction thickness.

S1.3.6 The reinstatement shall be designed using materials specified in [Appendix A1](#), [Appendix A2](#), [Appendix A9](#) and [Appendix A11](#). The overall layer thickness shall be as specified in [Appendix A3](#) through to [Appendix A7](#) for the various categories of carriageway, footway, footpath, cycle track, verge or unmade ground, and shall be compacted to the requirements of Section [S10](#) and [Appendix A8](#).

S1.4 Footway, Footpath and Cycle Track Categories

S1.4.1 Footways, footpaths and cycle tracks are categorised by this Specification as follows:

S1.4.2 High duty – those designated as principal routes and used by an exceptionally large number of pedestrians and/or cyclists.

S1.4.3 High amenity – routes surfaced with one of the following surfacings, and which have been constructed and maintained to a high standard:

- a) Surfaces chosen specifically for decorative purposes, with special colours, textures or surface finishes.
- b) Flexible surfaces with a particular texture or distinctive coloured finish. Such surfaces will usually be situated in conservation, leisure or ornamental areas, pedestrian precincts or where an Authority has maintained high quality paving.

S1.4.4 Other – those that are neither high duty nor high amenity.

S1.4.5 Where an Authority is able to demonstrate that a high amenity or high duty footway has been constructed and maintained to a standard in excess of that prescribed in Sections [S2.2](#) and [S2.3](#) and registered accordingly then in these instances the reinstatement shall meet the

Authority's standard of maintenance and their declared intervention criteria.

S1.5 Excavation and Trench Categories

S1.5.1 Excavations and trenches are categorised by this Specification as follows:

S1.5.2 Small Excavations – all openings with a surface area of 2 square metres or less. For the purposes of this Specification, test holes up to 150 mm diameter are not excavations and shall be reinstated in accordance with the requirements of Section [S11](#).

S1.5.3 Narrow Trenches –all trenches of surface width between 100 mm - 300 mm (75 mm – 300 mm with authority approval), with a surface area greater than 2 square metres.

S1.5.4 Deep Openings – all excavations and trenches in which the depth of cover over the buried apparatus is greater than 1.5 metres. Trenches with a depth of cover that is intermittently more than 1.5 metres for lengths of less than 5 metres are not deemed to be deep openings.

S1.5.5 Other Openings – all excavations and trenches with a surface area greater than 2 square metres.

S1.6 Alternative Options

S1.6.1 An Undertaker may adopt an alternative Specification for materials, layer thickness and compaction methods to take advantage of new or local materials and/or alternative compaction equipment, subject to the prior agreement of the Authority, which shall not be unreasonably withheld. There shall be no departure from the performance requirements during the guarantee period.

S1.6.2 An Undertaker may use alternative excavation processes and equipment, subject to the prior agreement of the Authority.

S1.6.3 Local agreements under this section only become valid when recorded using the procedure set out in [Appendix A9](#).

S1.6.4 Recycled, secondary or virgin materials, or any combination thereof, is permitted by this Specification, provided they meet the performance requirements and any compositional requirements detailed in this Specification for the relevant material layer.

S1.6.5 Stabilised materials shall be permitted for use as surround to apparatus, and at backfill and sub-base layers, provided they meet the relevant performance requirements of this Specification.

S1.6.6 Alternative Reinstatement Materials are described in [Appendix A9](#).

S1.7 Immediate Works

S1.7.1 There are circumstances when it is necessary to immediately reinstate an excavation, regardless of the material availability etc., to enable traffic or pedestrian movement to occur. In such circumstances, reinstatements may be completed using excavated or other materials, properly compacted in 100 mm layers, with a minimum surfacing thickness of 40 mm of bituminous material.

S1.7.2 All materials so placed which do not comply with the requirements of this Specification shall be re-excavated and reinstated, to the appropriate interim or permanent standard as specified, as soon as practicable, as agreed with the Authority following the completion of the immediate works.

S1.8 Apparatus within Carriageway, Footway and Cycle Track Structures

S1.8.1 Undertakers apparatus greater than 20 mm external diameter will not be permitted within carriageway, footway/footpath or cycletrack structures unless special circumstances exist (for example shallow cover over culverted watercourses, utility apparatus, etc.). In these special circumstances the utility must consult with the Authority whose approval

shall not be unreasonably withheld.

Apparatus of 20 mm external diameter or less shall not be permitted above or within 20 mm of the following levels within a road structure, see [Figure S1.1](#):

- a) The base/binder course interface in a flexible structure.
- b) The underside of the concrete slab in a rigid structure.
- c) The underside of the complete construction (formation layer) in a modular structure (refer to [Figure S6.1](#) to [Figure S6.3](#)).

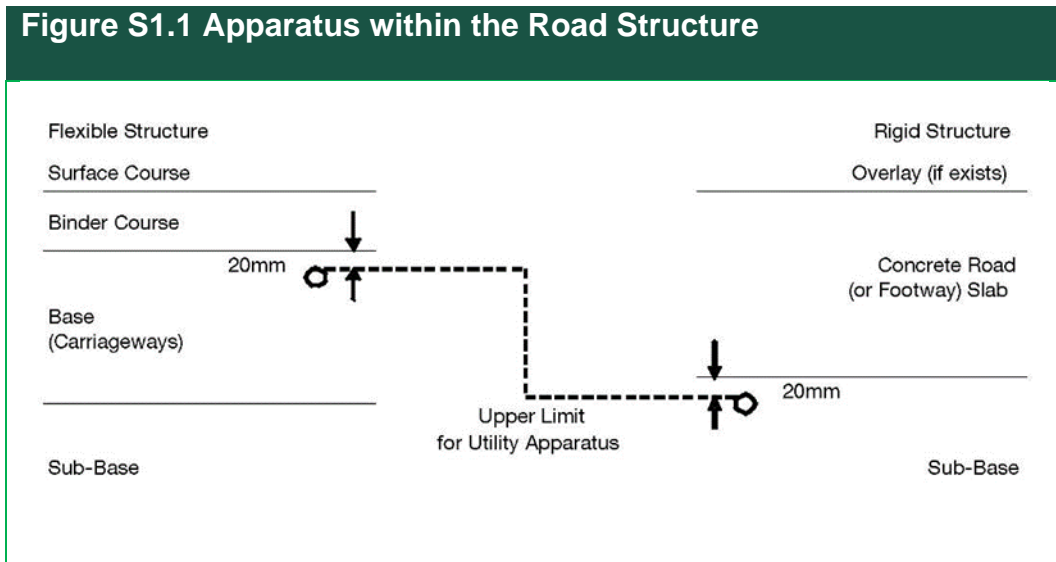


Figure S1.1

- S1.8.2** Where other existing apparatus or surrounds occur within the road structure, the method of reinstatement shall be determined by agreement.
- S1.8.3** The required minimum depths of cover to apparatus should be in accordance with Section [S13.4](#) and [Table S13.1](#).

S1.9 Geosynthetic Materials, Geotextiles and Reinforcement Grids

S1.9.1 Where the Authority knows of the existence of any of the above materials in areas likely to be affected by an Undertaker's work, they should inform the Undertaker, prior to the commencement of works, and/or place information detailing these as a Special Engineering Difficulty on the Gazetteer, so that an appropriate reinstatement method can be agreed.

S1.9.2 If the Undertaker is not informed of the existence of any of the above materials prior to the commencement of his works, but encounters them during the works, he should inform the Authority immediately so that an appropriate reinstatement method can be mutually agreed. In these circumstances, the Undertaker shall not be liable for the repair of any damage caused to geosynthetic materials, geotextiles or reinforcement grids if their existence was not known.

S1.10 Trees

S1.10.1 When working near trees, the National Joint Utilities Group (NJUG) publication Volume 4 "*NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees*" should be followed. The publication gives comprehensive advice and should be followed in its entirety. In the event of repeal or update of this document, please refer to the website of the Scottish Road Works Commissioner for current advice. Relevant extracts are reproduced in Notes for Guidance [NG1.10](#).

S1.10.2 In addition to the recommendations of the NJUG guidelines, the use of tree root barriers may be considered. Specialist advice from an arboriculturist should be sought.

S1.11 Conciliation and Arbitration

S1.11.1 This Specification is intended to provide sufficiently detailed guidance to enable agreement on its operation and implementation to be reached at

local level. Authorities and Undertakers should always use their best endeavours to achieve a solution to disputes without having to refer them to conciliation. This might be achieved by referring the issue to management for settlement.

S1.11.2 If, however, agreement cannot be reached, the provisions set out in the Code of Practice for Dispute Resolutions and Appeals should be followed.

S1.12 Waste

S1.12.1 It is acknowledged that all openings in roads will generate waste. It is also recognised all organisations undertaking road works take steps to reduce waste through the use of an adequate waste management plan.

S1.12.2 Where the specification describes collaboration, discretion or prior agreement all parties involved should consider the impact of waste and make efforts to progress towards net zero.

S1.13 Fleet (Plant and Vehicles)

S1.13.1 Organisations undertaking road works are encouraged to take steps to ensure all forms of plant and vehicles are as sustainable as practicable.

S1.13.2 Effort should be made to reduce the environmental impact of all journeys undertaken by the fleet.

S2 Performance Requirements

S2.1 General

S2.1.1 The performance requirements of this Specification shall apply to Roads that are maintainable or prospectively maintainable at public expense. In all other cases, the performance should match that of the existing construction, as far as reasonably practicable.

S2.1.2 Performance requirements shall apply to the immediate, interim and permanent reinstatements of Undertakers' excavations.

- a) For all interim reinstatements, the main consideration as to meeting the performance requirements generally set out in Section [S2](#) is primarily one of maintaining road safety.
- b) If the surface profile of a reinstatement exceeds any intervention limit during any guarantee period, remedial action shall be carried out to return the surface profile of the reinstatement to the as-laid condition defined in Section [S2.2.1](#).

S2.1.3 No new guarantee period shall be required unless the cumulative settlement intervention limit is exceeded and an engineering investigation has been completed in accordance with Section [S2.5](#). Requirements for the re-excavation and subsequent reinstatement, as determined from the results of an engineering investigation, shall be agreed and completed.

S2.1.4 Reinstatement of Modular Surface Layers is described in [Appendix A12](#). For all modular surfaces the effective width of a reinstatement shall be as follows:

- a) For modular surfaces where all sides of the module are 300 mm or less (or the nearest imperial equivalent), the effective width of a reinstatement (W) shall be the distance between two parallel lines drawn 150 mm outside the edges of the excavation. (See [Figure S2.1](#))

Figure S2.1 Effective Width of Reinstatement – Modules ≤ 300 mm

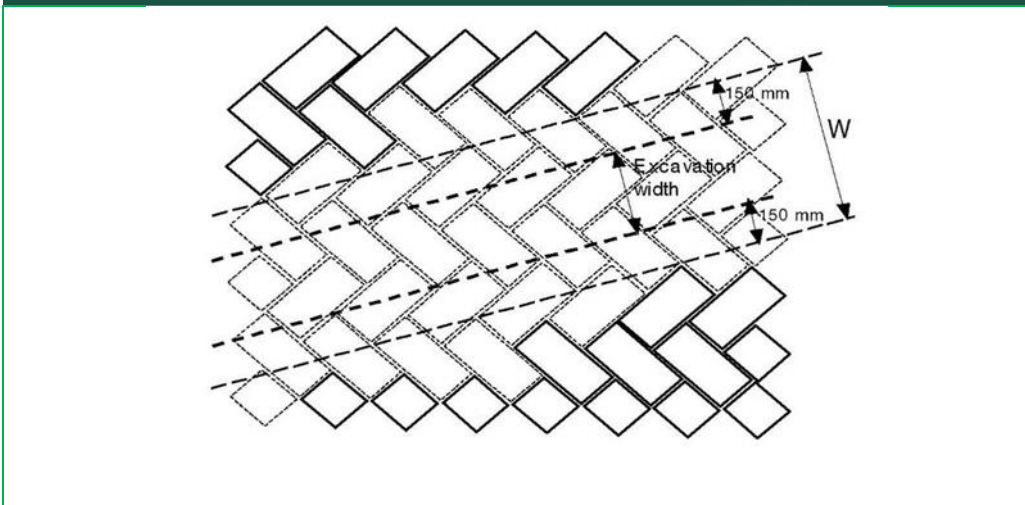


Figure S2.1

- b) For modular surfaces where one side of the module is greater than 300 mm, the effective width of a reinstatement (W) shall be the distance between the outer extremities of any modules that overlap the edge of the excavation (see [Figure S2.2](#)).

Figure S2.2 Effective Width of Reinstatement – Modules ≥ 300 mm

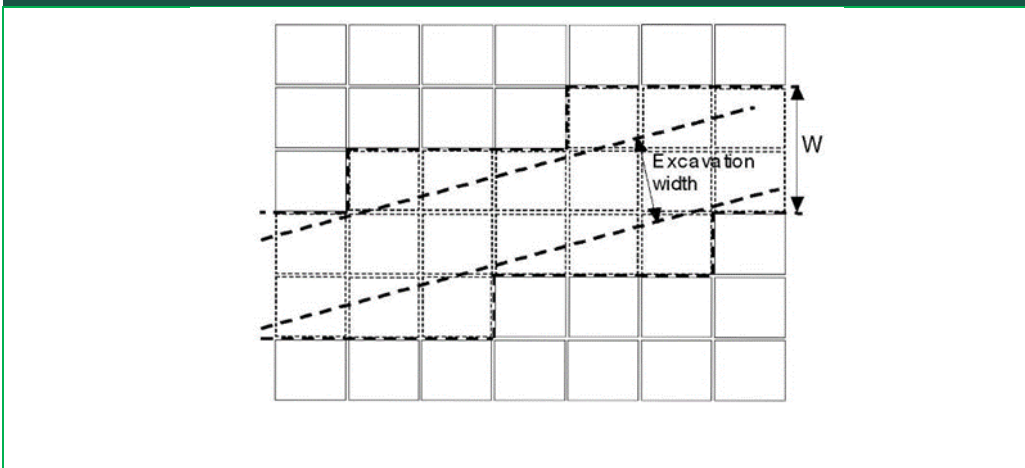


Figure S2.2

- a) Where there is evidence of further adjoining modules being affected by the excavation, the effective width shall be extended to include such modules.

S2.1.5 Surface deformation resulting from vehicles over-running reinstatements within paved footways, footpaths and cycle tracks, shall be excluded from all measurements carried out for the purposes of monitoring the reinstatement surface performance, unless such reinstatements have been carried out under the provisions of Section [S8.4](#).

However, where it can be shown that over-run by vehicles has caused surface deformation to a reinstatement within a paved footway, footpaths or cycle tracks and the adjacent surfaces do not show any associated surface deformation, the Authority may notify the Undertaker accordingly, whereupon the Undertaker shall restore the reinstatement to the as-laid profile.

S2.2 Surface Profile

S2.2.1 As-laid Profile

- a) The reinstatement of any surface shall be completed so that it is as flat and flush as possible with the surrounding adjacent surfaces. There should be no significant depression or crowning in the surface. Construction tolerances at the edges of the reinstatement shall not exceed +6 mm/-3 mm.
- b) Once the reinstatement is completed to either interim or permanent and opened to traffic, the intervention limits specified in Sections [S2.2.2](#) to [S2.2.5](#) shall apply.
- c) It should be recognised that the surface profile of reinstatements carried out in restricted areas (for example, around surface boxes and fixed features) using hand tools may be difficult to match with adjacent machine-laid surface profiles. In these cases, localised variations in the hand-laid surface profile should be acceptable to the Authority provided that they are within the specified tolerances.

S2.2.2 Edge Depression – Intervention

- a) An edge depression is a vertical step or trip at the interface of the reinstatement and the existing surface or a trip at the junction between ironwork and reinstatement.
- b) Intervention shall be required where the depth of any edge depression exceeds 10 mm over a continuous length of more than 100 mm in any direction; see [Figure S2.3](#).

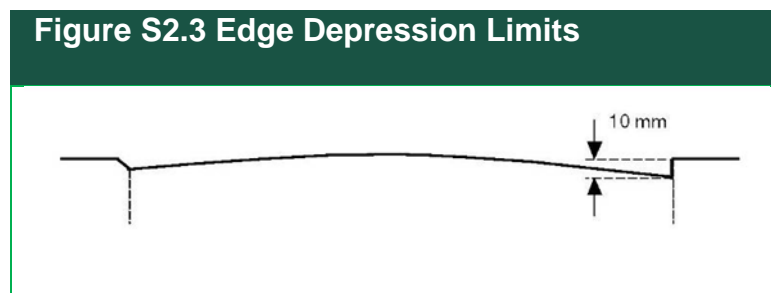


Figure S2.3

S2.2.3 Surface Depression / Crowning – Intervention

- a) A surface depression is a depressed area within the reinstatement having generally smooth edges and gently sloping sides, forming a shallow dish; see [Figure S2.4](#).

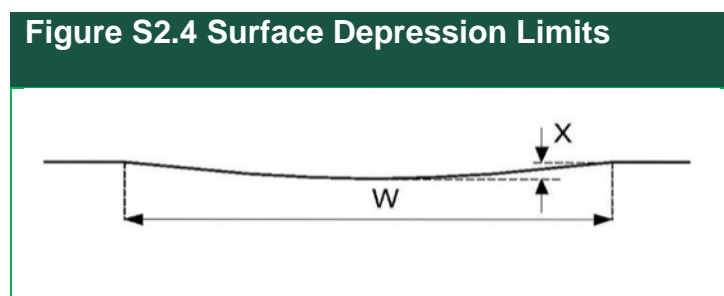


Figure S2.4

- b) Surface crowning is where the reinstatement is above the mean level of the existing adjacent surfaces; see [Figure S2.5](#).

Figure S2.5 Surface Crowning Limits

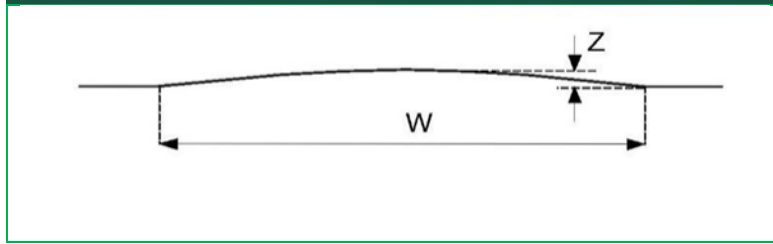


Figure S2.5

- c) Intervention shall be required where the depth of any area of surface depression or the height of any area of surface crowning spanning more than 100 mm in any plan dimension exceeds the intervention limit X or Z shown in [Table S2.1](#).

Table S2.1 Intervention Limits – Surface Depression / Crowning

Reinstatement Width W (mm)	Intervention Limit X or Z (mm)	Combined Defect Intervention Limit (mm)
Up to 400	10	10
Over 400 to 500	12	10
Over 500 to 600	14	12
Over 600 to 700	17	14
Over 700 to 800	19	16
Over 800 to 900	22	18
Over 900	25	20

Table S2.1

- d) Earlier intervention shall be required if the depression alone results in standing water wider than 500 mm or exceeding one square metre in area, at 2 hours after the cessation of rainfall. Pre-existing standing water in the surrounding area of the road should be taken into account.

S2.2.4 Combined Defect – Intervention

- a) A combined defect is an area within the reinstatement where any combination of edge depression, surface depression or surface crowning overlap exists.

- b) Where combined defects occur, the intervention limits for surface depression and surface crowning, shown in Section [S2.2](#) and [Table S2.1](#) as intervention limits X and Z, shall be reduced by 20% and rounded up to the nearest whole number, subject to a minimum of 10 mm.
- c) Intervention shall be required where the extent of any individual defect, spanning more than 100 mm in any plan dimension, exceeds the combined defect intervention limit for the relevant defect, as defined in [Table S2.1](#). The individual defects shall be measured, and the 20% reduction in intervention limits applied, as shown in Section [NG2.2.5](#).
- d) Earlier intervention shall be required if the depression alone results in standing water wider than 500 mm or exceeding one square metre in area, at 2 hours after the cessation of rainfall. Pre-existing standing water in the surrounding area of the road should be taken into account.

S2.2.5 Condition at End of Guarantee Period

- a) At the end of the guarantee period the condition of the reinstatement shall not be required to be superior, in any respect, to the condition of the adjacent surfaces, this includes High Friction/Coloured/Textured Surfacing and Road Markings.
- b) At the end of the guarantee period, where the profile of the existing surfaces adjacent to the reinstatement is uniform and the surface of the reinstatement is outside the intervention limits, the Undertaker shall carry out remedial works to restore the surface profile of the reinstatement to a condition consistent with the adjacent surfaces.

S2.3 Fixed Features


S2.3.1 As-Laid Profile

All fixed features, such as edgings, channel blocks, drainage fixtures, surface boxes and ironware etc., should be as level and flush as possible with the adjacent surfaces and shall be installed to meet the following level criteria:


- a) Fixed features shall be laid to coincide with the mean level of immediately adjacent surfaces.
- b) The construction tolerance between the levels of the fixed feature (excluding drainage features) and immediately adjacent surfaces shall not exceed ± 6 mm.
- c) Drainage features shall be set flush with the adjacent surface and subject to a construction tolerance of not more than 6 mm below the level of the adjacent surface.
- d) At a pedestrian crossing point that is flush with the adjacent surfaces, the kerbs shall be relaid flush with the adjacent surfaces to a tolerance of 0 to +6 mm.

[Figure S2.6](#) illustrates the relationship between immediately adjacent surfaces and the surround reinstatement to newly constructed Undertaker's apparatus when setting the level of access covers and frames to the apparatus.

Figure S2.6 As-Laid Profile of Fixed Features and Relationships with Immediately Adjacent Surfaces – Examples

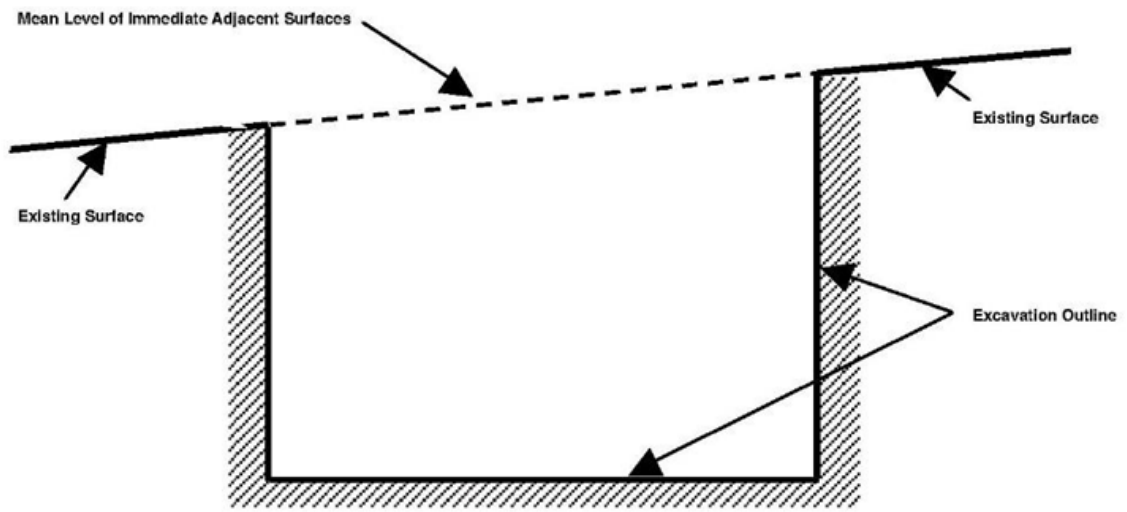


EXCAVATED CONDITION [1]

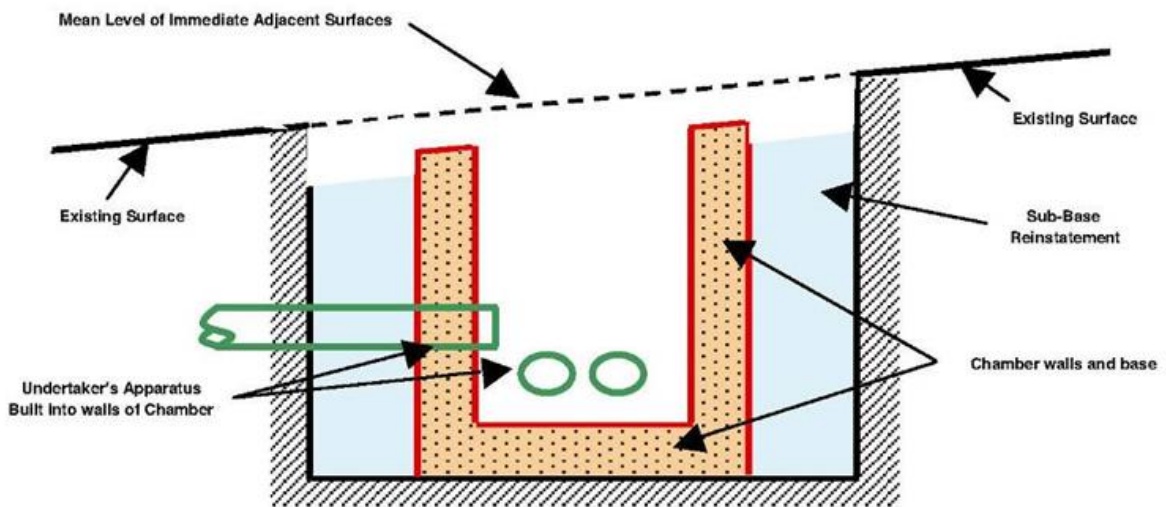


CONSTRUCTION OF CHAMBER and REINSTATEMENT (to top of Sub-Base) [2]

Figure S2.6 As-Laid Profile of Fixed Features and Relationships with Immediately Adjacent Surfaces – Examples

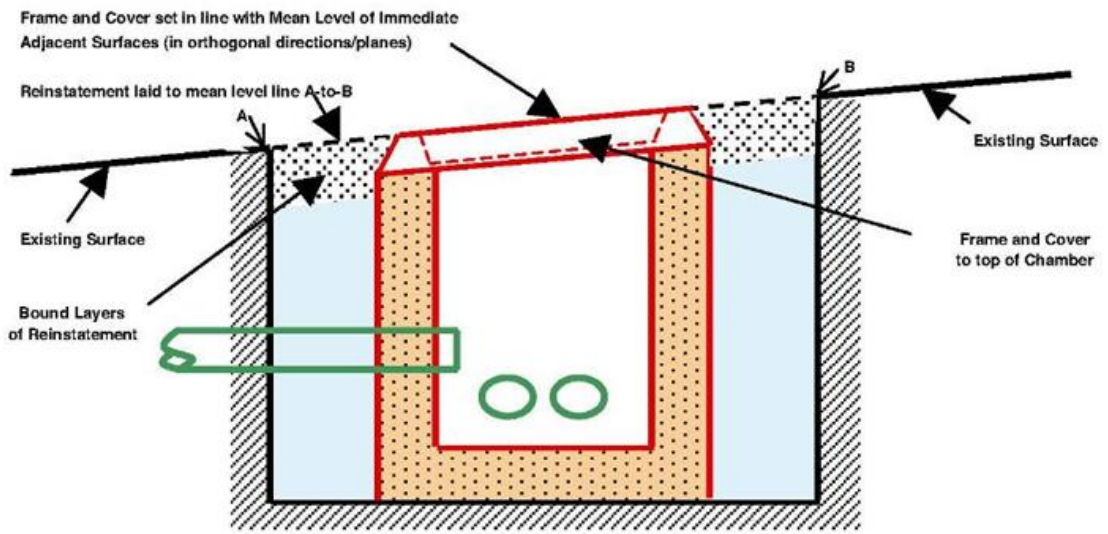

PERMANENT REINSTATEMENT (and Frame and Cover setting) [3]

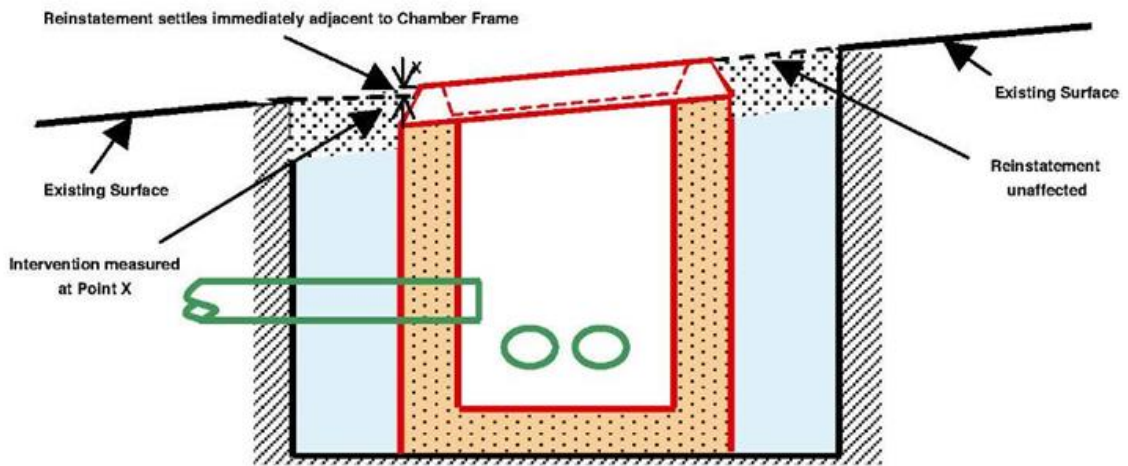

DEPRESSION OF SURROUND REINSTATEMENT (Surface Levels of Chamber Unchanged) [4]

Figure S2.6 As-Laid Profile of Fixed Features and Relationships with Immediately Adjacent Surfaces – Examples

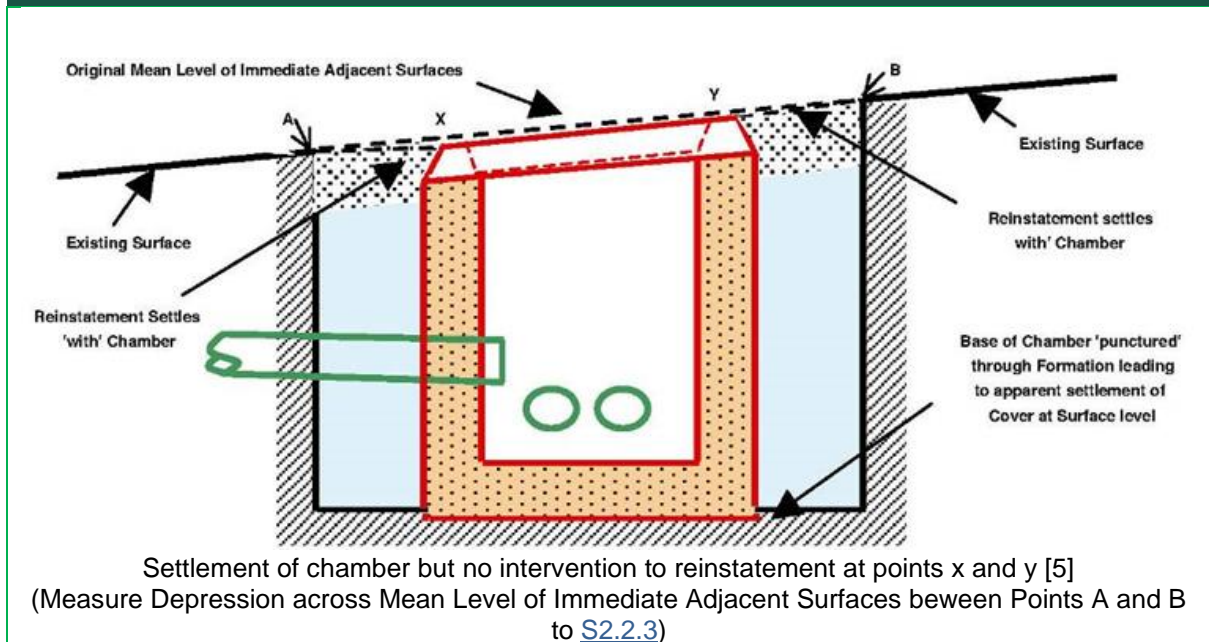


Figure S2.6

S2.3.2 Intervention

- Intervention is required where the mean level of edgings, channel blocks, surface boxes and ironware etc., does not coincide with the mean level of the immediately adjacent surfaces, within a tolerance of ± 10 mm.
- In the case of drainage fixtures, intervention is required where the mean level does not coincide with the mean level of the immediately adjacent surfaces, within a tolerance of 0 mm to -10 mm.
- In the case of a pedestrian crossing point, intervention is required where the depth of any edge depression at the interface between the paving (which can include tactile units) and the dropped kerb exceeds 6 mm over a continuous length of more than 100 mm in any direction.

S2.4 Surface Regularity

S2.4.1 Requirements

At any time during the guarantee period, the longitudinal regularity in the direction of traffic flow at the surface of the permanent reinstatement in the road and the adjacent wheel track shall comply with the following requirements:

- a) The number of longitudinal surface irregularities along a permanent reinstatement should not exceed the lower limit shown in [Table S2.2](#).

Table S2.2 Surface Regularity			
Surface Irregularities not less than (mm)	Irregularities per section		
	Lower Limit	Multiplier	Upper Limit
4	11	1.2	22
7	2	1.2	4
10	1	1.2	2

Table S2.2

- b) Where the number of longitudinal surface irregularities along a permanent reinstatement exceeds the lower limit shown in [Table S2.2](#), the number of irregularities along the adjacent wheel track shall be recorded, in the same direction of traffic flow, for comparison.
- c) Where the number of surface irregularities along a permanent reinstatement and the adjacent road both exceed the lower limit shown in [Table S2.2](#), the number of longitudinal surface irregularities recorded along the reinstatement should not exceed the product of the number measured along the adjacent road and the multiplier shown in [Table S2.2](#).

S2.4.2 Measurement

- a) Surface irregularities may be measured using the TRL rolling straightedge, however, the rolling straightedge shall not be used to determine surface regularity where:
 - i) The line of a trench is parallel to the centreline of the road for less than 30 metres length; or
 - ii) The line of a trench is parallel to the line of traffic flow for less than 30 metres length; or
 - iii) The line of a road and/or the trench follows a bend with a radius of less than 250 metres; or
 - iv) The number of surface irregularities recorded along the adjacent road exceeds the upper limit shown in [Table S2.2](#).
- b) Where the rolling straight edge cannot be used, the surface regularity shall be assessed by another agreed method.

S2.4.3 Monitoring

For the purposes of monitoring the surface regularity of road reinstatements, relevant lengths of the trench should be divided into test sections of 30 metres length. The upper and lower limit values for surface irregularities, for each 30 metre section length, are shown in [Table S2.2](#). For the final section length, which may exceed 30 metres but will be less than 60 metres, the limits should be calculated pro rata, and rounded up to the nearest whole number.

S2.5 Settlement

The requirements for settlement are applicable to both paved and unpaved surfaces.

S2.5.1 Cumulative Settlement

- a) The cumulative settlement of any reinstatement is the perpendicular distance, from the level of the adjacent surfaces, to the original surface of the reinstatement; see [Figure S2.7](#). This measurement will effectively include the thickness of any additional materials added during any preceding remedial work.

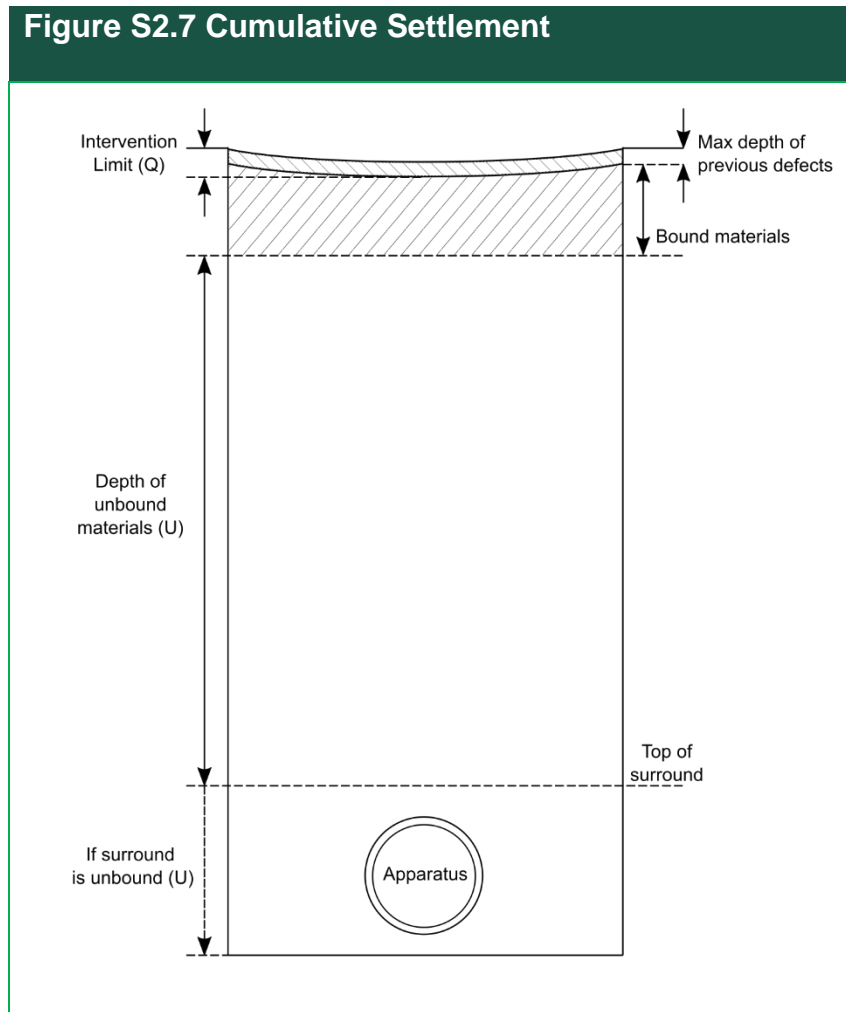


Figure S2.7

- b) If the cumulative settlement of a reinstatement exceeds the limits shown in [Figure S2.7](#) at any time within the guarantee period, the Undertaker may elect to carry out suitable remedial action. Where the Undertaker does not elect to carry out remedial action, an agreed engineering investigation may be carried out by the Authority in accordance with the provisions of Section 131 of the 1991 Act. The

Undertaker shall be afforded the opportunity to be present at the investigation and it should establish whether the Undertaker has complied with their duties with respect to reinstatement.

If default under their duties is established:

- i) The Undertaker will bear the cost of the investigation and carry out the required remedial action; and
- ii) A new guarantee period will also be afforded to the Authority as a consequence for the affected area of reinstatement.

Table S2.3 Settlement		
Reinstatement Width (mm)	Intervention Limit Q	
	Bad Ground Conditions (S2.8)	All Other Ground Conditions
Up to 1000	2.5% U or 30 mm (whichever is greater)	1.5% U or 30 mm (whichever is greater)
Over 1000	2.5% U or 35 mm (whichever is greater)	1.5% U or 35 mm (whichever is greater)

Table S2.3

- c) Where it is necessary to re-excavate a reinstatement to carry out an engineering investigation and it is found to be defective under the conditions of Section [S2.5](#), the subsequent permanent reinstatement shall be deemed to be new and the guarantee period shall begin again.

S2.6 Skid Resistance

S2.6.1 General

- S2.6.1.1 The texture depth, Polished Stone Value (PSV) and Aggregate Abrasion Value (AAV) at the running surface of all interim and permanent reinstatements in all roads shall comply with the requirements in this section.

S2.6.2 Texture Depth

S2.6.2.1 For all bituminous surface course materials permitted in [Appendix A2](#) and for rigid roads where the surface of the concrete road slab is the running surface of the road, the texture depth shall comply with the requirements of [Table S2.4](#).

S2.6.2.2 For rigid roads, where the surface of the concrete road slab is the running surface of the road and has been randomly grooved, a brushed surface finish to the requirements of [Table S2.4](#) shall be permitted for small excavations, narrow trenches and other openings less than 1 metre wide.

Table S2.4 Texture depth				
Reinstatement Location	Texture Depth (mm)			
	Chipped HRA & Surface Dressings	SMA & Thin Surface Course Systems	All other Bituminous Surfaces	Concrete Carriageways
Roads where speed limit > 56 mph (90 kph)	1.5 average 1.2 minimum	1.3 average 1.0 minimum	0.6 minimum	1.25 maximum 0.6 minimum
All other roads	1.0 average 0.8 minimum	1.0 average 0.8 minimum	0.6 minimum	

Table S2.4

S2.6.2.3 The average depth of carriageway surface macrotexture shall be measured using a volumetric patch technique as per BS EN 13036-1 described in MCHW Clause 921 for bituminous surfacing and Clause 1026 for concrete surfacing. For concrete or narrow reinstatements a modified version using 50% of the test medium (e.g. sand or glass beads) may be used.

S2.6.2.4 For the purposes of monitoring texture depth, the entire reinstatement shall be divided into notional units of 18 square metres and tested at evenly spaced intervals as follows:

- a) Reinstatement of small excavations – single measurement centred within the reinstatement

- b) Reinstatement of $>2 \text{ m}^2$ to 18 m^2 – 3 measurements
- c) Reinstatement $>18 \text{ m}^2$ – 3 measurements per 18 m^2
- d) Trenches 300 mm wide or less – as above but centred along the centreline of the trench

[Figure S2.8](#) illustrates the requirements of Section [S2.6.2.4](#) apart from small excavations.

S2.6.2.5 Where the test patch extends beyond the edge of the reinstatement the test shall be repeated using half the volume of test medium. Any comparison tests on the existing road should be carried out adjacent to the test locations in the reinstatement, as close to the reinstatement edge as practicable.

Figure S2.8 Sand Patch Testing – Typical Locations within Reinstatements

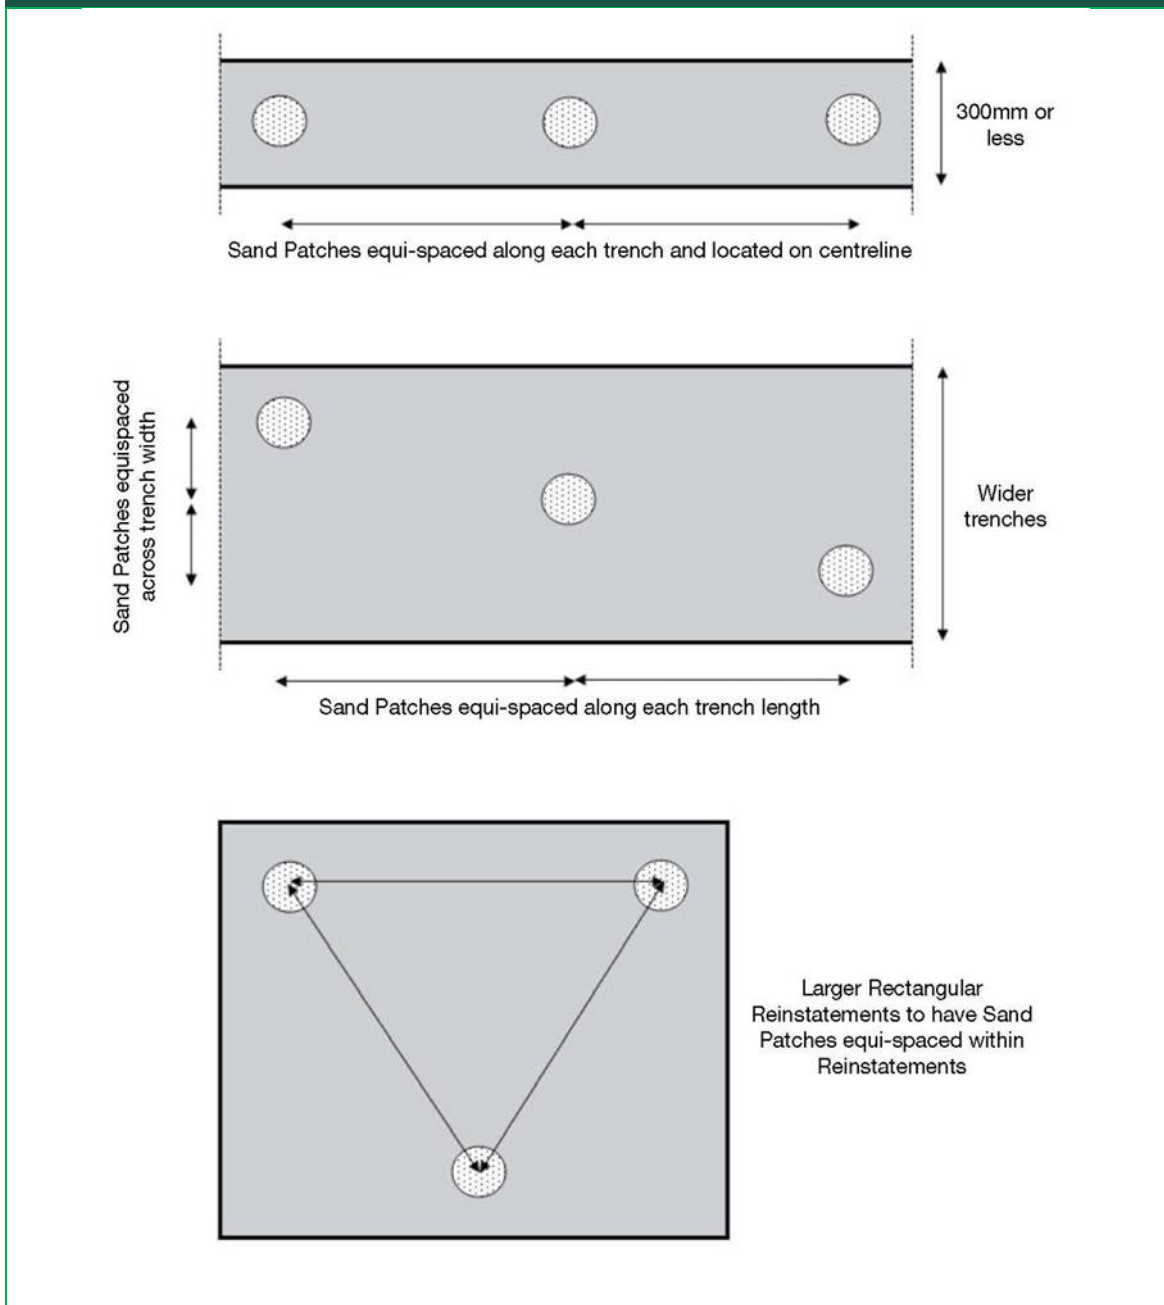


Figure S2.8

S2.6.3 Polished Stone Value (PSV)

S2.6.3.1 Unless specifically and reasonably required by the Authority, all aggregates used in surface courses will have a PSV value of not less than 55.

S2.6.3.2 Where specifically required by the Authority, to simplify the determination of the PSV requirements for aggregates in asphalt surface courses, reinstatements in roads are classified into two site categories, according to the apparent degree of risk associated with the site location, as follows:

a) Site A – Potentially High Risk

Includes:

- i) Traffic signals, pedestrian crossings, railway level crossings – including 50 m approaches
- ii) Roundabouts and their exits – including 50 m approaches
- iii) Bends < 100 m radius where the speed limit > 40 mph (65 kph) – including 50 m approaches
- iv) Downhill gradients > 10% for more than 50 m (single or dual carriageway)
- v) Uphill gradients > 10% for more than 50 m (single carriageway only)

or

b) Site B – Average or Low Risk

- i) All other situations on single and dual carriageways, including the following:
- ii) Generally straight sections of carriageway

- iii) Approaches to and across major/minor road junctions
- iv) Bends of 100 m radius or greater, at any speed limit
- v) Downhill/Uphill sections of 10% gradient or less

S2.6.3.3 For all bituminous surface course materials permitted in [Appendix A2](#), the PSV of all pre-coated chippings and the coarse aggregate in all mixes used without pre-coated chippings at the running surface shall comply with the requirements of [Table S2.5](#). The coarse aggregate in all mixes used with pre-coated chippings at the running surface shall have a minimum PSV of 45. The PSV shall be tested in accordance with BS EN 1097-8.

Table S2.5 Bituminous Roads – Polished Stone Value		
Road Type	Reinstatement Minimum PSV	
	Site A Potentially High Risk	Site B Average or Low Risk
0	65	65
1	65	65
2	65	55
3	65	55
4	55	55

Table S2.5

Note: The PSV values shown in [Table S2.5](#) have been chosen following review of the DMRB CD 236 – Surface Course Materials for Construction.

S2.6.3.4 Where an interim surface course contains an aggregate that may not comply with the requirements of [Table S2.5](#), a surface treatment may become necessary before the reinstatement is made permanent. In this event, the requirements of [Table S2.5](#) are applicable only to the coarse aggregate contained within the surface treatment and not to the underlying aggregate within the interim surface course.

S2.6.3.5 Where a high friction coating is to be applied to a reinstatement to match an existing coating, an alternative PSV may be specified by agreement, in place of the requirements of [Table S2.5](#), depending upon the nature of the site and the period over which the friction coating will be absent.

S2.6.3.6 Where a permanent surface course contains more than one type of aggregate or aggregates from more than one source, all coarse aggregates within the mixture shall comply with the PSV requirements of [Table S2.5](#).

S2.6.4 Aggregate Abrasion Value (AAV)

S2.6.4.1 For all bituminous surface course materials permitted in [Appendix A2](#) the AAV of all pre-coated chippings and the coarse aggregate in all mixes used without pre-coated chippings at the running surface shall comply with the requirements of [Table S2.6](#).

Table S2.6 Bituminous Roads – Aggregate Abrasion Value		
Road Type	Reinstatement Maximum AAV	
	All Pre-coated Chippings	SMA, Material to PD6691 Surface Courses
0	10	12
1	12	14
2	12	14
3	14	16
4	14	16

Table S2.6

(See also Section [S6.4](#) for permitted surface course options)

S2.6.4.2 The AAV shall be measured in accordance with BS EN 1097-8

S2.6.4.3 Where an interim surface course material contains an aggregate that may not comply with the requirements of [Table S2.6](#), a surface treatment may become necessary before the reinstatement is made permanent. In this event, the requirements of [Table S2.6](#) are applicable only to the coarse

aggregate contained within the surface treatment and not to the underlying aggregate within the interim surface course.

S2.6.4.4 The past use of [Table S2.6](#) has indicated that the minimum values noted are appropriate in most cases. However, where an Authority has alternative requirements for aggregate properties then this information shall be supplied to the Undertaker. Where this is the case the Undertaker shall specify aggregate properties in accordance with this information.

S2.7 Sampling and Testing

S2.7.1 All sampling and testing shall be carried out by a laboratory holding current UKAS accreditation covering the specified method of testing, unless otherwise agreed.

S2.7.2 The Authority may carry out sampling and testing at its discretion. If there is no agreement between the Authority and Undertaker on the test results and findings, further testing may be undertaken by a UKAS accredited laboratory to reconcile the matter.

S2.8 Bad Ground

S2.8.1 Bad ground is deemed to be natural or made-up ground between the base of the excavation and the binder course level, which contains any of the following:

- a) Class E Unacceptable Materials, as specified in [Appendix A1](#).
- b) Materials that are loose or friable in their natural state and are not self-supporting at an exposed face.
- c) An excessive amount of rocks or boulders, loose random rubble, penning, setts or cobbles etc., at any depth where their removal during excavation could cause loosening of the ground adjacent to the excavation.

d) Materials that are saturated, regardless of whether free or running water is present.

S2.8.2 Where excavation work is carried out in bad ground, early consultation between undertaker and authority is advised, to give consideration to agreeing an appropriate reinstatement method. This may include an extension of the interim reinstatement period, where an appropriate extension will allow the reinstatement and surrounding ground to achieve an acceptable degree of stability before permanent reinstatement is required. The performance requirements of Section [S2](#) shall apply throughout the extended interim period.

S2.9 Cracking

S2.9.1 Interface Cracking

Cracking along the reinstatement interface greater than 2.5 mm open width at the surface for more than the [Table S2.7](#), or greater than 30 mm open width at its widest point, shall require remedial action in accordance with the requirements of Section [S12.3.2](#).

Table S2.7 Cracking		
Reinstatement	Surface	Maximum Crack Length
Small Excavations to S1.5.1	All Surfaces	500 mm total cumulative length
Narrow Trenches to S1.5.2 and All Other Openings to S1.5.4	Footway	1000 mm maximum Crack Length
	All Carriageway Types	500 mm maximum Crack Length

Table S2.7

S2.9.2 Cracking Beyond Reinstatement Limits

S2.9.2.1 Cracks remote from the reinstatement interface, greater than 2.5 mm open width at the surface for more than the maximum permitted length shown in [Table S2.7](#), shall require remedial action in accordance with the requirements of Section [S12.3.2](#), provided it can reasonably be shown that such cracks occurred directly as a result of the Undertakers' works (see also Section [S12.3](#)).

S2.10 Works in deteriorated or distressed areas

S2.10.1 It can be difficult and sometimes impossible to construct a compliant reinstatement where:

- a) existing surfaces are close to or exceed the intervention and construction tolerances in Section [S2](#); or
- b) the road, footway, footpath or cycle track shows signs of deterioration or distress (either at the surface or during excavation); or
- c) the existing construction is under designed (e.g. layers are thinner than specified in this Code); or
- d) for modular surfaces, it may be necessary to install different sized modules or cementitious infills (see Appendix [A12.3](#)) to minimise surface irregularities at the interfaces to meet the requirements of Section [S2](#).

S2.10.2 If at any stage, constructing a compliant reinstatement is not considered possible, it is the undertaker's responsibility:

- a) to record the condition of the existing surface (ideally before excavation) and structure; and
- b) to demonstrate risk management of the works to avoid or limit damage to comply with the specification (including the use of flowable materials, or enhanced materials as per Appendix [A2.4](#) for surface course reinstatements, to avoid disruption of the surrounding structure during compaction); and
- c) if practicable, to contact the authority and agree an appropriate reinstatement method.

- S2.10.3** Where there is no agreement, or reaching one is impractical owing to time constraints, the undertaker must provide evidence of the existing condition to the authority and explain why the reinstatement may not comply with the specification.
- S2.10.4** Where the undertaker has explained to the authority why the reinstatement may not comply with the specification:
- a) the undertaker is under no obligation to extend the reinstatement works but must ensure that there is no edge depression (see Section [S2.2.2](#)) after construction; and
 - b) the undertaker must repair cracking (see Section [S12.3](#)) and settlement beyond reinstatement limits (see Section [S12.4](#)) that occur during the reinstatement works.
- S2.10.5** If, in the absence of an agreement on an appropriate reinstatement method, the reinstatement fails during the guarantee period, local resolution should be sought in the first instance, or in any case, the hierarchy of resolution via the provisions set out in the Code of Practice for Dispute Resolution and Appeals.

S3 Excavation

S3.1 Breaking the Surface

S3.1.1 Care must be taken when cutting surface layers to avoid undue damage to the running surface or to the bond between the surface course and binder course materials. Cutting by machine, e.g. road saw, coring equipment or planer, is preferred. All loose materials shall be removed to ensure that the trench edge is in a safe and stable condition.

S3.1.2 When excavating in modular construction, the existing modules shall be lifted carefully, and stored for re-use. Where pre-existing damage has resulted in fragmentation or breakage of modules made out of natural materials the fragments shall be removed and stored, unless agreed otherwise with the Authority.

S3.1.3 The Authority shall be informed of any material, natural material, cobbles or setts encountered that may be of historical or archaeological interest and shall be afforded the opportunity to inspect the material prior to it being excavated.

S3.1.4 Modules shall be reinstated in accordance with [Appendix A12](#).

S3.2 Excavation

S3.2.1 All excavations in the road shall be carried out in a manner that avoids undue damage.

S3.2.2 The trench width shall be such that adequate access is available for compaction of the surround to apparatus.

S3.2.3 The trench walls shall be even and vertical with no undercutting of the running surface. If undercutting occurs and compaction is impossible, measures shall be taken to fill any voids as soon as practicable or immediately after trench support has been provided.

S3.2.4 Excavations shall be protected, as far as is reasonably practicable, from the ingress of water, and water running into them shall be drained or pumped to an approved disposal point. Any drainage sumps shall be sited so as to prevent damage to the excavation.

S3.3 Excavated Material

S3.3.1 All excavated materials that are to be re-used shall be protected from excessive drying or wetting during storage. Additionally, these materials shall be excavated, stored, handled and laid so as to avoid contamination and loss of fines.

S3.3.2 Excavated material unsuitable for re-use shall be removed from site as soon as practicable. Excavated material retained on site shall be stockpiled within the confines of site barriers, at a safe distance from the trench edge and prevented, so far as is practicable, from entering any drainage system or water course.

S3.4 Side Support

S3.4.1 The sides of all excavations in soft or loose ground shall, ordinarily, be provided with a side support system. The support system shall be properly designed and installed to restrain lateral movement of the sidewalls, and should be installed without delay.

S3.4.2 Supports shall be progressively withdrawn as backfilling and compaction progresses, and all voids carefully filled.

S3.5 Drainage

S3.5.1 The Undertaker shall take all reasonably practicable measures to prevent the permanent disturbance of artificial or natural drainage systems/paths. Where disturbance does occur it shall be notified immediately to the owners of the system and any landowners who are affected. Disturbed systems shall be restored to the requirements of the owner; see Section [S11.4](#).

S3.5.2 For any works site where the Authority is aware of a history of flooding or drainage problems it should inform the Undertaker in advance. In such situations the Undertaker and the Authority should liaise closely to identify a suitable method of working.

S3.5.3 If site conditions indicate to the Undertaker that the use of some sub-base materials may be detrimental to drainage, advice on the selection of suitable materials should be sought from the Authority.

S3.5.4 See also Section [S11.4](#) for other water-related matters.

S3.6 Shallow or Aborted Excavations

S3.6.1 No shallow or aborted excavation shall be permitted to undermine the integrity of the remaining road structure. Any excavation terminated at an incomplete stage or depth for whatever reason shall, depending on the layer at which the excavation was terminated, be reinstated in accordance with the following requirements:

- a) Where reinstatement can be achieved by laying a thicker surface course in accordance with the thickness requirements of [Appendix A2](#) and, in the case of small excavations and narrow trenches, in accordance with Section [S6.4.12](#) no further excavation is required.
- b) In all other cases, the binder course shall be excavated to allow a binder course layer to be reinstated in accordance with [Appendix A2](#). Where the existing depth of excavation is greater than 100 mm and

the additional depth is less than the minimum layer thickness of Base material a thicker binder course may be laid.

- c) In deeper excavations, no further excavation shall be required. Reinstatement shall be carried out in accordance with the relevant requirements of Sections [S5](#) to [S9](#) inclusive, as appropriate.

S3.7 Trenchless Pipelaying

S3.7.1 Mole-ploughing uses a ploughing machine to pull a flexible pipe or cable below ground. It is employed in unmade ground and may be used in the verges of roads. The mole-plough creates a slit in the surface of the ground, which should not require reinstating provided that the surface profile is restored in accordance with Section [S9](#). However, where connections are made to apparatus installed by mole-ploughing techniques, excavations shall be carried out and reinstated in accordance with this Specification.

S3.7.2 Soil Displacement Molding and other trenchless methods do not create an excavation and, when carried out in a proper manner, do not require reinstatement. However, reinstatement shall be carried out in accordance with this Specification at the launch and receive pits and at any intermediate excavations where connections are made to apparatus installed by Soil Displacement Molding and other trenchless techniques.

S3.7.3 Where, as a result of the use of trenchless methods for the installation of apparatus under a road, the Authority has reasonable cause to believe that damage may have been caused to the structure of the road, the Investigatory Works Procedure described in the RAUC(S) Code of Practice for Inspections should be commenced as if the defect was associated with a reinstatement defect for the purposes of that Code. Any remedial work agreed between the Authority and the Undertaker, if carried out by the Undertaker, shall be in accordance with this Specification at the Undertaker's expense.

- S3.7.4 If the agreed remedial work is carried out by the Authority at the Undertaker's expense the provisions of this Specification shall not apply.
- S3.7.5 In the absence of agreement between the Authority and the Undertaker, liability for any damage shall be determined in accordance with section 141 of the Act (*Liability for damage or loss caused*).

S4 Surround to Apparatus

S4.1 General

S4.1.1 Surround to the apparatus may be laid to a maximum thickness of 250 mm above the crown of the Undertaker's apparatus. The surround to apparatus shall not intrude into the road structure. It may be necessary on occasions for the Undertaker to lay apparatus deeper, should there be a need to include surround to their apparatus.

S4.1.2 Laying and compaction procedures used for all materials laid as surround to the apparatus shall be the responsibility of the Undertakers.

S4.1.3 The selection of materials for the surround to apparatus shall be the responsibility of the relevant Undertaker. However, all materials used for the surround to apparatus shall comply with the following requirements:

- a) Class E Unacceptable Materials, as defined in [Appendix A1](#), and materials that contain particles greater than 37.5 mm nominal size shall not be used as surround to the apparatus.
- b) An Alternative Reinstatement Material (ARM) may be used for the entire surround to apparatus or any part thereof, in accordance with [Appendix A9](#).
- c) Preformed modules or other protective measures may be placed within the surround to apparatus, according to the Undertaker's requirements.

S5 Backfill

S5.1 Backfill Material Classification

S5.1.1 General

Backfill materials, whether imported to site or derived on-site from excavated materials, shall be classified as follows:

S5.1.2 Class A – Graded Granular Materials

S5.1.2.1 Materials with a maximum of 10% by mass passing a 63 micron (μm) BS sieve, and with all material passing a 425 micron (μm) BS sieve showing a plasticity index of 6 or less, determined in accordance with BS1377: Part 2: Method 5.4, are classified as Class A Graded Granular Materials.

S5.1.2.2 Class A graded granular materials may include Granular Sub-base Material Type 2 to SHW Clause 804 (excluding natural sands and gravels) and Granular Sub-base Material Type 1 to SHW Clause 803.

S5.1.3 Class B – Granular Materials

Materials with a maximum of 10% by mass passing a 63 micron (μm) BS sieve are classified as Class B Granular Materials.

S5.1.4 Class C – Cohesive/Granular Materials

Mixtures of granular, silt and clay materials with between 10% and 80% by mass passing a 63 micron (μm) BS sieve are classified as Class C Cohesive/Granular Materials.

S5.1.5 Class D – Cohesive Materials

Clay, silt or mixtures of clay and silt with at least 80% by mass passing a 63 micron (μm) BS sieve are classified as Class D Cohesive Materials.

S5.1.6 Class E – Unacceptable Materials

- S5.1.6.1 Materials listed as unacceptable in paragraphs 2 ii) and 3 of SHW Clause 601 shall not be used, at any level, within the permanent structure of any reinstatement. Materials classified as unacceptable are listed in [Appendix A1](#).
- S5.1.6.2 The requirements of [Appendix A1](#) shall apply to unbound backfill materials.
- S5.1.6.3 All backfill materials Classes A to D shall be compacted in accordance with [Appendix A8](#).

S5.1.7 Foamed Concretes for Reinstatements (FCRs)

- S5.1.7.1 These materials are classified as Class A for the purposes of determining the requirements for sub-base reinstatement in accordance with Section [S6.2](#).
- S5.1.7.2 These are cement-bound materials that have been prepared off-site, generally as “prescribed” mixes, at an approved mixing plant and under appropriate quality control procedures. They are flowable in nature and should not require compaction when placed. Such materials manufactured under these conditions, and any foamed concretes conforming to Clause 1043 and with aggregates of the Specification for Highway Works are deemed to be approved for use. FCRs do not necessarily incorporate a coarse aggregate. Layer thickness and compressive strength requirements shall be in accordance with [Table A9.1](#).
- S5.1.7.3 In accordance with the SHW the composition of all recycled aggregate and recycled concrete aggregate shall be tested as specified in Clause 710 of the MCHW1. The content of other materials (Class X) shall not exceed 1% by mass or by volume, whichever is the greater.
- S5.1.7.4 FCR permissible constituents shall exclude potash and bottom furnace ash.

S5.1.7.5 The requirements of [Appendix A1](#) apply to unbound backfill materials.

S5.1.7.6 Backfill materials Classes A to D must be compacted in accordance with [Appendix A8](#).

S5.1.8 Hydraulically Bound Mixtures (HBM)

S5.1.8.1 These materials are classified as Class A for the purposes of determining the requirements for sub-base reinstatement in accordance with Section [S6.2](#).

S5.1.8.2 Hydraulically bound mixtures (HBMs) are mixtures that set and harden by hydraulic reaction. They include:

- cement bound materials (i.e. mixtures based on the fast setting and hardening characteristics of cement); and
- slow setting and hardening mixtures made from industrial by-products such as fly ash (FA) and ground granulated blast furnace slag (GGBS).

These materials comprise any HBM specified in BSEN 14227-1, -2, -3, -5, -10, -11, -12, -13 & -14, and shall be produced, handled, transported, used and tested in accordance with the SHW 800 series. Although not called up in the SHW, the HBM types, SBM B4, FABM 4 and HRBBM 4 from BSEN14227-2, -3, & -5 respectively are also included since they are purposely suited for trench reinstatement work. HBMs therefore should be produced, constructed and tested in accordance with the SHW 800 series as if they were SBM B3, FABM 3 and HRBBM 4 respectively. Layer thickness and compressive strength requirements shall be in accordance with [Table A9.1](#) except that the specified compressive strength requirement shall be deemed to apply at 28 days as detailed in Appendix [A9.3.4](#).

S5.1.8.3 Backfill materials Classes A to D must be compacted in accordance with [Appendix A8](#). HBMs must be compacted in accordance with [Appendix A9.2](#).

S5.1.8.4 These materials are classified as Class A for the purposes of determining the requirements for sub-base reinstatement in accordance with [Section S6.2](#).

S5.2 Alternative Reinstatement Materials

S5.2.1 Alternative Reinstatement Materials (ARMs) may be used for the entire backfill layer, or any part thereof, in accordance with [Appendix A9](#).

S5.3 Additional Requirements

S5.3.1 Frost Heave Susceptibility

S5.3.1.1 Frost susceptible material is deemed to be material with a mean heave greater than 15 mm when tested in accordance with BS 812 – 124 (as amended by SHW Clause 801.8).

S5.3.1.2 Where frost susceptible materials already exist within 450 mm of the surface, such materials may be reinstated to the same levels but, generally, frost susceptible material shall not be used within 450 mm of a road surface. However, 300 mm of wholly bituminous material is considered to provide adequate insulation and may be used as an alternative.

S5.3.1.3 In the event of prior notification by the Authority, where the existing depth of non-frost susceptible materials is greater than 450 mm below the road surface and the Authority requires such a thickness of non-frost susceptible material to be maintained, then only non-frost susceptible materials shall be used for the relevant depth.

S5.3.1.4 All frost heave susceptibility testing shall be carried out by a laboratory holding current UKAS accreditation for the specified method of testing, unless otherwise agreed.

S5.3.2 Maximum Particle Size

The maximum particle size for all granular backfill materials used as backfill shall comply with the following requirements:

- a) All granular backfill materials shall pass through a 75 mm BS sieve.
- b) All granular backfill materials used in the reinstatement of trenches less than 100mm shall pass through a sieve of no greater than 2/3 the width of the trench.

S5.3.3 Surround to Apparatus as Backfill

Where the excavation depth does not allow the use of a separate backfill layer, the sub-base layer shall be laid directly onto the surround to apparatus. In such cases, the surround material shall represent backfill material and shall be classified in accordance with Section S5.1, for the purposes of determining the requirements for sub-base reinstatement in accordance with Section [S6.2](#).

S5.3.4 Protective Measures to Apparatus

Preformed modules or other protective measures may be placed within the backfill, according to the Undertaker's requirements.

S5.3.5 Chalk

Not used.

S6 Flexible and Composite Roads

S6.1 Reinstatement Methods

S6.1.1 General

- S6.1.1.1 The Undertaker shall carry out the reinstatement in accordance with one of the following methods and should endeavour to achieve the greatest degree of immediate permanent reinstatement. Reinstatement methods are listed in [Table A2.6](#).
- S6.1.1.2 Permitted materials and layer thickness are specified in [Appendix A1](#) to [Appendix A4](#), [Appendix A9](#) and [Appendix A11](#).
- S6.1.1.3 Where the Authority knows of any site with high sulphate levels, dangerous toxins or contaminants it should advise Undertakers in advance of the works so that appropriate measures may be taken. Ideally this information should be stored on the Scottish Road Works Register (Scottish Road Works Register), as a Special Engineering Difficulty (SED) for dangerous toxins and contaminants, where it is available to all Undertakers and Roads Authorities. Similarly where an Undertaker discovers any dangerous toxins or contaminants in the ground, it should inform the Local Authority such that they can update the register.
- S6.1.1.4 For laybys, offset bus stops and car parking areas where the Authority knows of non-standard construction likely to be affected by an Undertaker's work, they should inform the Undertaker, prior to the commencement of works, and/or place information detailing these as a Special Engineering Difficulty on the Gazetteer, so that an appropriate action can be agreed. If the Undertaker is not informed of the existence of the a non-standard construction prior to the commencement of their works, but encounters them during the works, they should inform the Authority immediately so that an appropriate action can be mutually agreed.

S6.1.2 Method A – All Permanent Reinstatement

The excavation shall be reinstated to a permanent standard at the first visit.

S6.1.3 Method B – Permanent Binder Course Reinstatement

S6.1.3.1 The backfill, sub-base, Base and binder course shall be reinstated to a permanent standard at the first visit.

S6.1.3.2 The permanent binder course material, or an alternative interim material, shall be extended to the surface as the interim surface course, with or without a thin separating material layer of sand at the position of the binder course/surface course interface.

S6.1.3.3 On the second visit, all interim surfacing materials shall be removed, to the top of the binder course, typically by cold planing, and a permanent surface course shall be laid.

S6.1.3.4 Where a sand separation layer is present, prior to the reinstatement of the permanent surface course the sand shall be removed, the surface brushed clean and a bond coat applied.

S6.1.4 Method C – Permanent Base Reinstatement

S6.1.4.1 The backfill, sub-base and Base shall be reinstated to a permanent standard at the first visit.

S6.1.4.2 The interim surface course and part, or all, of the interim binder course, may be deferred set material. Part, or all, of the entire interim binder course may be an unbound granular material.

S6.1.4.3 On the second visit, all interim surfacing materials shall be removed, to the top of the Base, and a permanent binder course and surface course shall be laid.

S6.1.5 Method D – Permanent Sub-base Reinstatement

- S6.1.5.1 The backfill and sub-base shall be reinstated to a permanent standard at the first visit
- S6.1.5.2 The interim Base shall be granular and the interim surfacing shall be in accordance with the relevant requirements of Section [S6.1.4](#).
- S6.1.5.3 On the second visit, all interim materials shall be removed, to the top of the sub-base, and a permanent Base, binder course and surface course laid.

S6.2 Sub-base Reinstatement

S6.2.1 General

Permitted options are shown in [Figure A3.5](#), [Figure A4.4](#) & [Figure A4.5](#) – subject to the following exceptions:

- a) Sub-base Equivalence: The thickness of granular sub-bases may be reduced, provided that the thickness of the bituminous binder course is increased proportionately, in accordance with Section [S6.3.3](#).
- b) Small Reinstatements: CBGM B sub-base of 150 mm thickness may be used in small excavations and narrow trenches regardless of whether the existing sub-base is cement bound. Where this option is utilised, the Base material shall also be a bound material.
- c) Alternative Reinstatement Materials: Alternative Reinstatement Materials (ARMs) may be laid to the top of sub-base level, in accordance with [Appendix A9](#), regardless of whether the existing sub-base is a bound material.

S6.3 Base Reinstatement

S6.3.1 General

Permitted options are shown in [Appendix A3](#) and [Appendix A4](#), subject to the following provisions:

S6.3.2 CBGM B in Flexible and Composite Roads

S6.3.2.1 In Types 0 & 1 roads, where a CBGM B Base is used, the reinstatement may either be surfaced on the same day or the CBGM B shall be allowed 7 days to cure before surfacing is undertaken. In either case, the CBGM B shall be allowed 7 days to cure before the road is opened to traffic.

S6.3.2.2 In Types 2, 3 & 4 roads, where the reinstatement is surfaced on the same day that the CBGM B Base is placed, the road may be opened to traffic on the following day. Where the CBGM B Base is not surfaced on the same day, the reinstatement shall be allowed 3 days to cure before surfacing is undertaken.

S6.3.2.3 All composite roads constructed with a Base of CBGM B lean-mix concrete or equivalent shall be reinstated with a CBGM B Base.

S6.3.2.4 In composite roads, the reinstated CBGM B Base shall be laid flush with the top of the existing cement-bound Base.

S6.3.3 Base Equivalence

In Type 3 and 4 flexible roads, the thickness of granular bases may be reduced or increased provided that the thickness of the bituminous binder course is increased or reduced proportionately, in accordance with the following requirements:

- a) Each 10 mm change in bituminous binder course thickness is equivalent to a 35 mm converse change in thickness of Type 1 Granular Sub-Base at Base and/or sub-base levels. Lift thicknesses must be considered as described in [Table A2.1](#), as well as the absolute minimum combined thickness of 100 mm in the bituminous layers.
- b) This equivalence rule may be applied to include the total replacement of all granular materials at both sub-base and Base levels, subject to the following restrictions:
 - i) Binder course and surface course thickness in Type 3 and 4 roads are subject to minimum values of 100 mm and shall not be reduced by application of the 10:35 equivalence of bituminous/granular materials; and
 - ii) Where part of a granular Base and/or sub-base is to be replaced by additional binder course material, the remaining total thickness of granular material at Base and/or sub-base level shall not be less than 150 mm.

S6.3.4 Modular Materials within the Excavation

- S6.3.4.1 Where cobbles, or setts, are encountered during excavation, they may be recovered and re-used for reinstatement of the relevant layer. Alternatively, at the discretion of the Undertaker, the layer may be reinstated using a suitable material (agreed with the road authority) laid to a thickness of 100 mm, or to match the original thickness, whichever is greater. Note if working on Rigid or Modular Roads refer to Section [S7.6.1.1](#).
- S6.3.4.2 Layers of modules, cobbles/setts, stones, rocks, or other large aggregate particles laid upright, in an interlocking fashion, often termed 'penning', will exhibit a greater stiffness than an equivalent layer of cobbles/setts laid horizontally. Where such upright interlocking modules are encountered,

the layer shall be reinstated using CBGM B laid to a thickness of 100 mm, or to match the original thickness, whichever is greater.

- S6.3.4.3 Where surplus modules, cobbles, or setts, are removed from site, they shall remain the property of the Authority. The Undertaker shall notify the Authority and retain them for 10 days following such notification. Thereafter, the Undertaker shall be free to dispose of all remaining modules, cobbles and setts.
- S6.3.4.4 Where CBGM B is used at Base level, it shall be used in accordance with Section [S6.3.2](#).

S6.3.5 Alternative Reinstatement Materials

Alternative Reinstatement Materials (ARMs) may be laid to the top of Base level, in accordance with [Appendix A9](#), regardless of whether the existing Base is a bound material.

S6.4 Surface Reinstatement

S6.4.1 General

Permitted options are shown in [Appendix A2](#) to [Appendix A4](#) inclusive, subject to the following provisions:

S6.4.2 Hot Rolled Asphalt (HRA) Surface

Where the existing Surface Course material is HRA, it shall be reinstated with HRA as per [Appendix A2](#) to [Appendix A4](#).

S6.4.3 Stone Mastic Asphalt (SMA) Surface

S6.4.3.1 Where the existing surface course material is SMA the surface course shall be reinstated to either;

- a) match existing; or
- b) HRA (see [S6.4.2](#) above) where the reinstatement size is not large enough to be laid by machine; or
- c) by joint agreement, Asphalt Concrete (see [S6.4.5](#) below) where the reinstatement size is not large enough to be laid by machine.

S6.4.3.2 These options are subject to the following requirements:

- a) Generic SMA shall match the existing nominal aggregate size of the existing surface course material. Reduction in nominal aggregate size shall only be where agreed with the Authority and shall take into account texture depth requirements.
- b) The combined thickness of binder course and the surface course, shall be as shown in [Appendix A3](#) to [Appendix A4](#), and be at least 100 mm.

S6.4.3.3 Edge and base preparation for permanent reinstatements shall be as follows:

- a) All edges shall be saw cut or trimmed by saw, to a depth of 40 mm or the thickness of the surface course, prior to permanent reinstatement.
- b) A certified bond coat (BS 594987, Clause 5.5) must be applied in accordance with Section [S6.5.1](#).
- c) An edge sealant shall be applied in accordance with Section [S6.5.2](#).

S6.4.3.4 Where the Authority has a policy to grit or otherwise treat newly laid SMA surfacings, it should advise the Undertaker of the required method and materials and the Undertaker shall comply.

S6.4.4 Thin Surface Course Systems

S6.4.4.1 Where the existing surface course material is a thin surface course system (TSCS) the road shall be reinstated either match existing, or with or, by agreement with the authority (which will not be unreasonably withheld), with HRA (see [S6.4.2](#) above). These options are subject to the following requirements:

- a) Thin surface course mixtures shall match the existing nominal aggregate size of the existing surface course material. Reduction in nominal aggregate size shall only be where agreed with the Authority and shall take into account texture depth requirements.
- b) The combined thickness of binder course and the surface course, shall be as shown in [Figure A3.0](#) to [Figure A3.4](#), and be at least 100 mm.

S6.4.4.2 Edge and base preparation shall be as follows:

- a) All edges shall be saw cut or trimmed by saw to the thickness of the surface course, prior to permanent reinstatement.
- b) A certified bond coat (BS 594987, Clause 5.5) must be applied in accordance with Section [S6.5.1](#).

c) An edge sealant shall be applied in accordance with Section [S6.5.2](#).

S6.4.5 Asphalt Concrete Surface Course Materials

S6.4.5.1 Where the existing surface course material is asphalt concrete it may be reinstated with any of the surface course options in [Appendix A2](#) to [Appendix A4](#).

S6.4.5.2 Where used, asphalt concrete surface course materials shall be AC 10 or AC 14 close surf, laid 40 mm thick.

S6.4.6 Asphalt Concrete Binder Course Materials

Where asphalt concrete binder course is to be used as the running surface for a period in excess of 6 months the usual supplier declared target binder content shall be increased by 0.5%.

S6.4.7 Other Bituminous Materials

Where it is necessary to use bituminous materials not included in [Appendix A2](#), they shall be used in accordance with the following:

S6.4.7.1 General Requirements

- a) Where existing road surfaces have been treated or constructed with a high friction surfacing, porous asphalt, coloured and/or textured surfacing, and local custom and practice has been to complete all previous resurfacing with like materials, the permanent reinstatement shall be carried out in accordance with the following requirements:
 - i) High friction surfaces shall be permanently reinstated with like materials, or an agreed alternative material, in accordance with Section [S6.4.7.2](#).
 - ii) In the event of notification by the Authority the reinstatement of any existing porous asphalt surface course (excluding small reinstatements) shall be carried out in accordance with the

Authority's requirements. Small reinstatements shall be reinstated as detailed in Section [S6.4.7.3](#).

- iii) Coloured/Textured surfaces shall be permanently reinstated with like materials, or an agreed alternative material, in accordance with Section [S6.4.7.4](#).
- b) When requested by the Undertaker, the Authority shall identify an appropriate source of suitable like or alternative materials, wherever possible. Where the Authority has been unable to identify an appropriate source of suitable material, the Undertaker shall provide a suitable material on the basis of best reasonable endeavours.
- c) Where existing road surfaces have been treated or constructed with high friction surfacings, porous asphalt or coloured surfacings and local custom and practice has not been to complete all previous resurfacing with like materials, the Undertaker shall consult with the Authority to determine appropriate reinstatement requirements.
- d) Where other specialist surfacing materials not included in [Appendix A2](#) or Section [S6.4.7.1](#) a) above have been used, they may generally be permanently reinstated in accordance with Section [S6.4.7.5](#).

S6.4.7.2 High Friction Surfacings

- a) High friction surfacings shall be permanently reinstated with a like material within 15 working days following the date of completion of the reinstatement, unless the successful application of the high friction surfacing is prevented by;
 - i) the prevailing weather conditions; or
 - ii) site circumstances justifying delaying the reinstatement of the high friction surfacing. i.e. The need for the new surface course material to be trafficked and/or aged prior to the application of a cold-applied material if this is specified by the system supplier.

The permanent reinstatement may be deferred until such a time as agreed with the authority.

- b) Prior to the application of the permanent, or any interim, friction surfacing, warning signs shall be displayed indicating a potential slippery road surface.
- c) All high friction materials must have a certificate from a Product Acceptance Scheme. These materials must be laid in accordance with the manufacturer's instructions by a contractor with suitable experience, as required by the Product Acceptance Scheme for such materials.
- d) Some high friction surfacing materials have a limited manufacturer's guarantee and may be subject to wear and abrasion during the guarantee period. However, the reinstated area shall not be inferior to the adjoining surface during the guarantee period.

S6.4.7.3 Porous Asphalt (small reinstatements)

Small reinstatements which do not adversely affect the overall drainage characteristics of the site, may be reinstated using SMA subject to the following:

- a) Multiple small reinstatements using SMA shall not be closer than 3 m to each other in the principal direction of fall or surface drainage flow.
- b) Porous asphalt surface courses shall be reinstated to nominally match the thickness of the existing layer.
- c) The binder course of porous asphalt reinstatements shall be hot rolled asphalt.
- d) All edges shall be saw cut, or trimmed by saw, to a minimum depth of 50 mm (or the thickness of the surface course, if greater), prior to permanent reinstatement.

- e) For permanent reinstatements using porous asphalt, all edges shall be cleared of all contamination and treated with a light application of tack coat material, not edge sealant. A K1-40 tack coat or Product Acceptance Scheme certified bond coat shall be applied at a minimum rate of 0.5 to 0.7 l/m², in accordance with Section [S6.5.1](#).
- f) For permanent reinstatements using SMA, all edges shall be treated with edge sealant, preferably a non-rubberised sealant applied by spray. A K1-40 tack coat or Product Acceptance Scheme certified bond coat shall be applied to the base of the reinstatement in accordance with Section [S6.5.1](#).

S6.4.7.4 Coloured Surfacing

Coloured surfacings used to highlight highway features such as speed warnings, bus or cycle lanes, 'gateways' etc. shall be permanently reinstated using like materials of equivalent type and similar colour, subject to the following requirements:

- a) Where the coloured surfacing is overlaid onto a road surface, a coloured overlay shall be applied to the same thickness.
- b) Where the coloured surface course is laid full depth, a coloured material shall be laid to the same thickness, wherever possible and practical. Where it is not possible or practical, the coloured surfacing material shall be reinstated by agreement.
- c) Some high friction surfacing materials that are coloured have a limited manufacturer's guarantee and may be subject to wear and abrasion during the guarantee period. However, the reinstated area shall not be inferior to the adjoining surface during the guarantee period.

S6.4.7.5 Other Specialist Surfacing Materials

- a) Specialist surfacings not included in [Appendix A2](#) or Section [S6.4.7.1](#) shall generally be reinstated with SMA. Such surfaces shall be

recorded as a Special Engineering Difficulty for notification purposes.

- b) Where the overall area is sufficiently large to facilitate machine laying and the local custom and practice has been to complete all previous resurfacing with like materials and the Authority wishes to request the use of like materials, the Authority shall:
 - i) Notify the Undertaker accordingly at the planning or notice stage, or in the case of immediate works, before the permanent reinstatement.
 - ii) Identify an appropriate source of suitable like or equivalent materials.
- c) All other surfacing materials not covered above, including grouted bituminous materials, traffic calming materials, surface treatments etc., shall be permanently reinstated by agreement.

S6.4.8 Surface Treatments

In all types of roads,

- a) Surface dressing or other surface treatment is not required when any binder course and surface course option permitted by Section [S6.4](#) is laid; or
- b) The surfacing layers and equivalent surface treatment shall be reinstated by agreement.

S6.4.9 Coated Chippings

S6.4.9.1 All pre-coated chippings shall be as specified in [Appendix A2](#).

S6.4.9.2 Where pre-coated chippings are to be embedded into a road surface, they shall meet the requirements for surface texture specified in Section [S2.6](#).

S6.4.10 Composite Roads

The total combined thickness of the reinstated binder course and surface course shall match the existing asphalt thickness unless it is less than 100 mm. Where the existing combined thickness is less than 100 mm, an absolute minimum of 100 mm shall be reinstated with an equivalent thickness of concrete underneath. Wherever practicable, the required surface course thickness should be maintained by adjustment of the binder course thickness.

S6.4.11 Single Course Construction

Not used.

S6.4.12 Small Excavations, Narrow Trenches and Access Chamber Covers

- a) In types 3 and 4 roads, a permanent surface course material in accordance with [Appendix A2](#) may be laid in place of a permanent binder course material at Base and/or binder course level in:
 - i) small excavations and narrow trenches (as defined in Sections [S1.5.2](#) and [S1.5.3](#));
 - ii) within 350 mm of access chamber covers.
- b) Where this option is used there shall be no substitution of bitumen binder equivalence, as permitted under [Appendix A11](#).

S6.4.13 Large Diameter Cores (Core & Vac excavation and reinstatement)

S6.4.13.1 General

- a) Large diameter coring is a technique whereby a core greater than 150 mm diameter is cut out of the bound layers of the road surface in one piece and stored for re-use when reinstating the road. Excavation of the underlying unbound material is typically accomplished by vacuum extraction. After work on the apparatus is complete, the unbound

material is replaced and compacted, and the extracted core is re-fitted to the road in its original orientation and bonded to the surrounding surface. Reinstatement by re-using the extracted core is a specialist process and is described in this Section [S6.4.13.6 2](#)).

- b) Large diameter coring is particularly useful for gaining access to individual pieces of apparatus such as buried valves, and it is considerably quicker than conventional excavation and reinstatement methods. The technique should only be considered where the location of buried apparatus is precisely known. It is not permitted where there is a risk of cutting through services located within the bound layers.
- c) The method of reinstatement by core re-use is only permitted for single cores, two overlapping cores, or multiple cores with a minimum clear separation between core perimeters of 300 mm. The reason for these limitations is that three or more overlapping cores present too many bonded cuts to guarantee the integrity of the reinstated surface while very closely spaced cores create compaction problems in the unbound layers.
- d) As such, where there are three or more overlapping cores or where the separation between multiple cores is less than 300 mm, core re-use is not permitted unless agreed to by the authority (see [Figure S6.1](#)). Where this is the case, reinstatement must be carried out in accordance with Section [S6.2](#), [S6.3](#) and [S6.4](#), as appropriate.
- e) Aborted coring works must be considered as large diameter cores within the above.

Figure S6.1 Large Diameter cores location

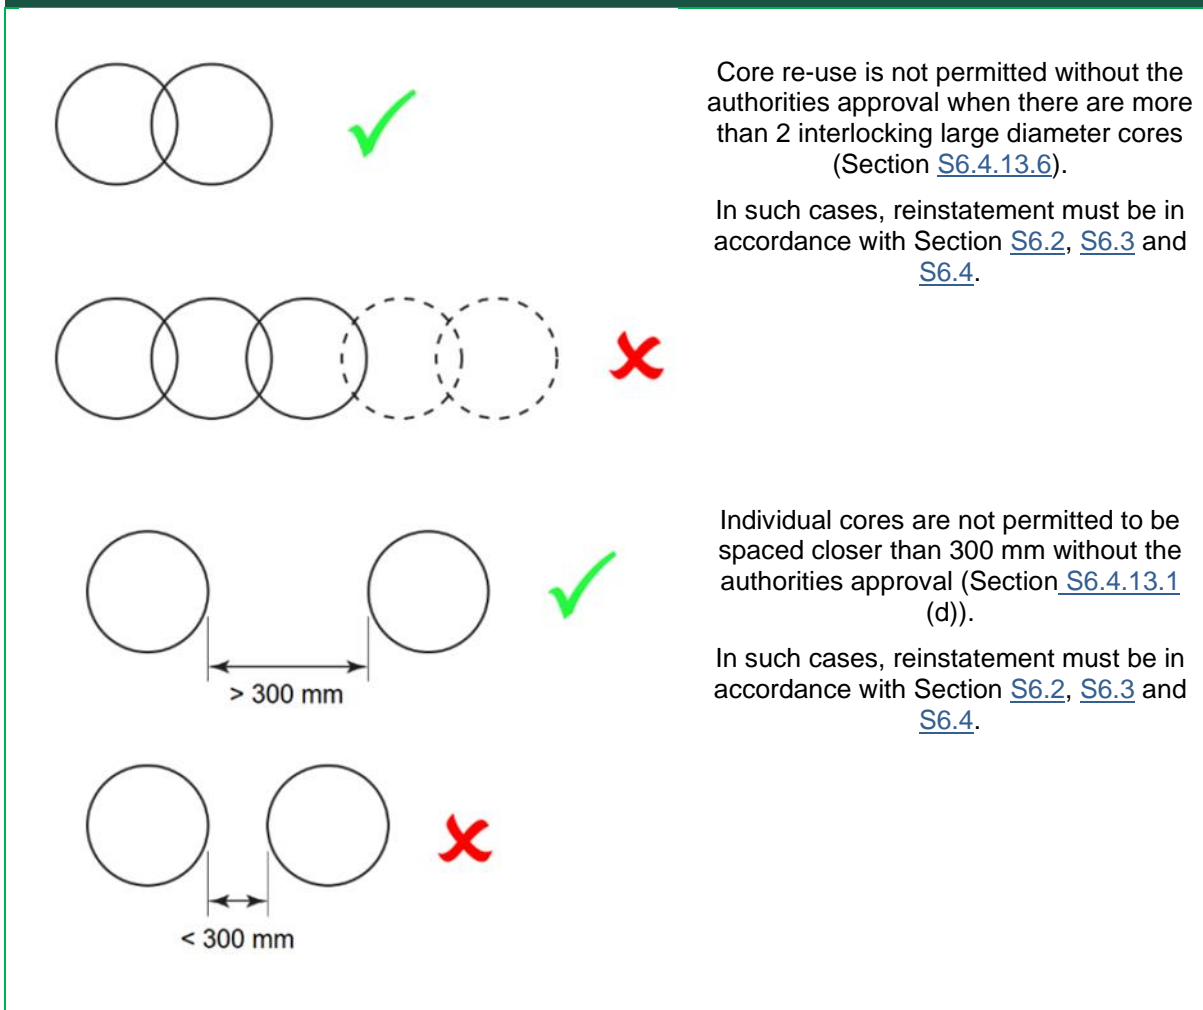


Figure S6.1

S6.4.13.2 Coring and removal of large diameter cores

- a) Before cutting the main core, a pilot core (not exceeding 100 mm diameter and located in the centre of the main core) must be taken to determine the depth of the bound layers (or the slab in an unreinforced concrete road). If the depth of the bound layers/concrete slab is less than 100 mm, reinstatement by core re-use is not permitted.
- b) Temporary location and alignment marks should be made on the road surface before cutting the main core to ensure that it can be replaced in its original orientation. Care must be taken when cutting surface

layers to avoid undue damage to the surrounding surface and binder course.

- c) Large diameter coring must only be undertaken with purpose-designed equipment and in accordance with the manufacturer's instructions. The cutter must be positioned perpendicular to the surface and extended to a depth that ensures that all the bound layers are removed as a single core.
- d) Care must be taken to minimise dust and debris when core cutting. Water used for cooling the cutter must not contaminate water courses. Where the gradient or camber is significant, this must be considered as part of the overall site-specific risk assessment to ensure the operation can be safely completed.
- e) Once the core has been removed, a further check must be undertaken to ensure that the depth of the bound layers is at least 100 mm around the full circumference of the core. If the depth is found to be less than 100 mm, reinstatement by re-using the core is not permitted.

S6.4.13.3 Excavation

- a) Excavation must be carried out in accordance with Section [S3](#) of this Code. Material may be removed by conventional excavation methods or by air lance and/or vacuum excavation. Irrespective of the method of excavation, care must be taken to avoid undermining the adjoining structure.
- b) Where undermining of the adjoining structure does occur, reinstatement by re-using the core is not permitted and reinstatement must be carried out in accordance with Section [S6.2](#), [S6.3](#) and [S6.4](#), as appropriate. This may require further excavation of the bound layers, in accordance with Section [S3](#), to enable compaction of the underlying layers.

S6.4.13.4 Materials – Bonding material for large diameter core reinstatement

- a) A bonding material certified by a Product Acceptance Scheme must be used. It must meet the requirements of BS 6319-3&7: (Testing of resin and polymer/cement compositions for use in construction) and BS EN 12390-3 (Testing concrete - Compressive Strength of test specimens).
- b) The manufacturer's instructions must be followed for the use, preparation and application of the bonding material, in accordance with the Product Acceptance Scheme.

S6.4.13.5 Backfill and granular sub-base compaction

- a) Backfill must be selected and placed in accordance with Section [S5](#).
- b) Granular sub-base material must be placed in accordance with Section [S6.2](#). If the sub-base is bound it will be extracted as part of the core and reinstated in accordance with Section [S6.4.13.6](#) (2).
- c) A layer of single size granular material may be used to aid levelling of the core. The layer must not exceed 50 mm in thickness at any point.

S6.4.13.6 Core reinstatement and bonding

1) Suitability of extracted core for re-use

- a) If the core is damaged, it cannot be re-used and the opening must be reinstated in accordance with Section [S6.2](#), [S6.3](#) and [S6.4](#), as appropriate.
- b) A core is unacceptable for permanent reinstatement where any of the following conditions exist:
 - i) It contains any vertical open cracks ≥ 3 mm wide when measured on the face of the core; or

- ii) Horizontal delamination is present in any layer in the core; or
 - iii) The core is less than 100 mm deep.
- c) If there is any doubt over the integrity of the core, core re-use is not permitted and it must be reinstated in accordance with Section [S6.2](#), [S6.3](#) and [S6.4](#), whichever are applicable.

2) Reinstatement of removed large diameter core

- a) Large diameter cores must be prepared in accordance with the Product Acceptance Scheme of the bonding agent, orientated to their original alignment, and bonded in-situ.
- b) The procedure for reinstatement must be included in the method statement for the works which must be available if requested by the authority.
- c) The core must be reinstated so that it is as flush as possible with the surrounding surfaces. The construction tolerance at the edges of the reinstatement is 5 mm maximum at any time within the guarantee period.
- d) Intervention is required if this tolerance is exceeded or there is any significant visual deterioration in the surface of the core compared with the surrounding surface.

3) Records

- a) A record containing the location and details of all large diameter cores must be registered within the relevant notice.
- b) Cores must be registered as an individual reinstatement within the works. For example, for a 600 mm diameter core, reinstatement measures (as registered on the notice) should record a measure of 0.6 m x 0.6 m per core extracted. Where two 600 mm cores overlap by, say, 150 mm, the reinstatement should be registered as 0.6 m x

1.05 m (where $1.05 = 2 \times 0.6 \text{ minus } 0.15$).

- c) There should also be a comment recorded in the works description area of the notice, for example, "Large diameter core hole(s) outside No 1 High Street".

S6.5 Base and Edge Preparation

S6.5.1 Base Preparation

- S6.5.1.1 All surfaces shall be free of contamination prior to the application of a bond coat. This is especially important after the removal of a sand separation layer.
- S6.5.1.2 A bond coat shall be applied to the surface of all bound layers whether cementitious or bituminous prior to overlaying in all circumstances.
- S6.5.1.3 The bond coat shall be applied at a rate to ensure a residual bitumen content of 0.15 kg/m^2 .
- S6.5.1.4 Multiple lifts of the same material laid during a single visit on the same day do not require treatment between lifts. However, a bond coat shall be applied prior to placement of the permanent surface course layer in work carried out under Section [S6.4.12](#).
- S6.5.1.5 A bitumen emulsion edge sealant may be used as a bond coat in small excavations and narrow trenches.

S6.5.2 Edge Preparation

S6.5.2.1 Edge Regularity

The edges of excavations may need to be trimmed, at binder course and/or surface course level, to meet the following requirements:

- a) All bound edges shall be substantially;
 - i) straight;
 - ii) smooth; and
 - iii) vertical.

Edge regularity requirements are intended to provide a shape that will not hinder the compaction of material adjacent to the reinstatement edge. Overlapping edge cuts and corner cut outs should be minimal and all cuts extending into the existing surface shall be filled with flexible bituminous sealant. A circular excavation shall be considered a regular shape.

- b) The internal corners and edges of a reinstatement shall be as square as possible. Internal corners and edges shall not be less than a nominal 90°.
- c) There shall be no requirement to trim the sides of trench excavations solely to provide a uniform width, provided that individual projections are not less than 250 mm length, measured parallel to the nominal centreline of the trench. See also [Figure S6.2\(b\)](#).
- d) There shall be no requirement to trim a small excavation solely in order to provide a square or rectangular shape. Any shape, in any excavation, with included angles which may be less than 90°, with no projection less than 250 mm length, may be considered to be regular. See also [Figure S6.2\(a\)](#).
- e) Where the existing surfacing material is sound at the corners of an excavation, there shall be no necessity to cut out to a corner; a regular chamfer may be preferable.

The final shape of the excavation when viewed from above should be governed by the above principles rather than by aesthetic

considerations (see [Figure S6.2](#)).

Figure S6.2 Examples of Prepared Edge

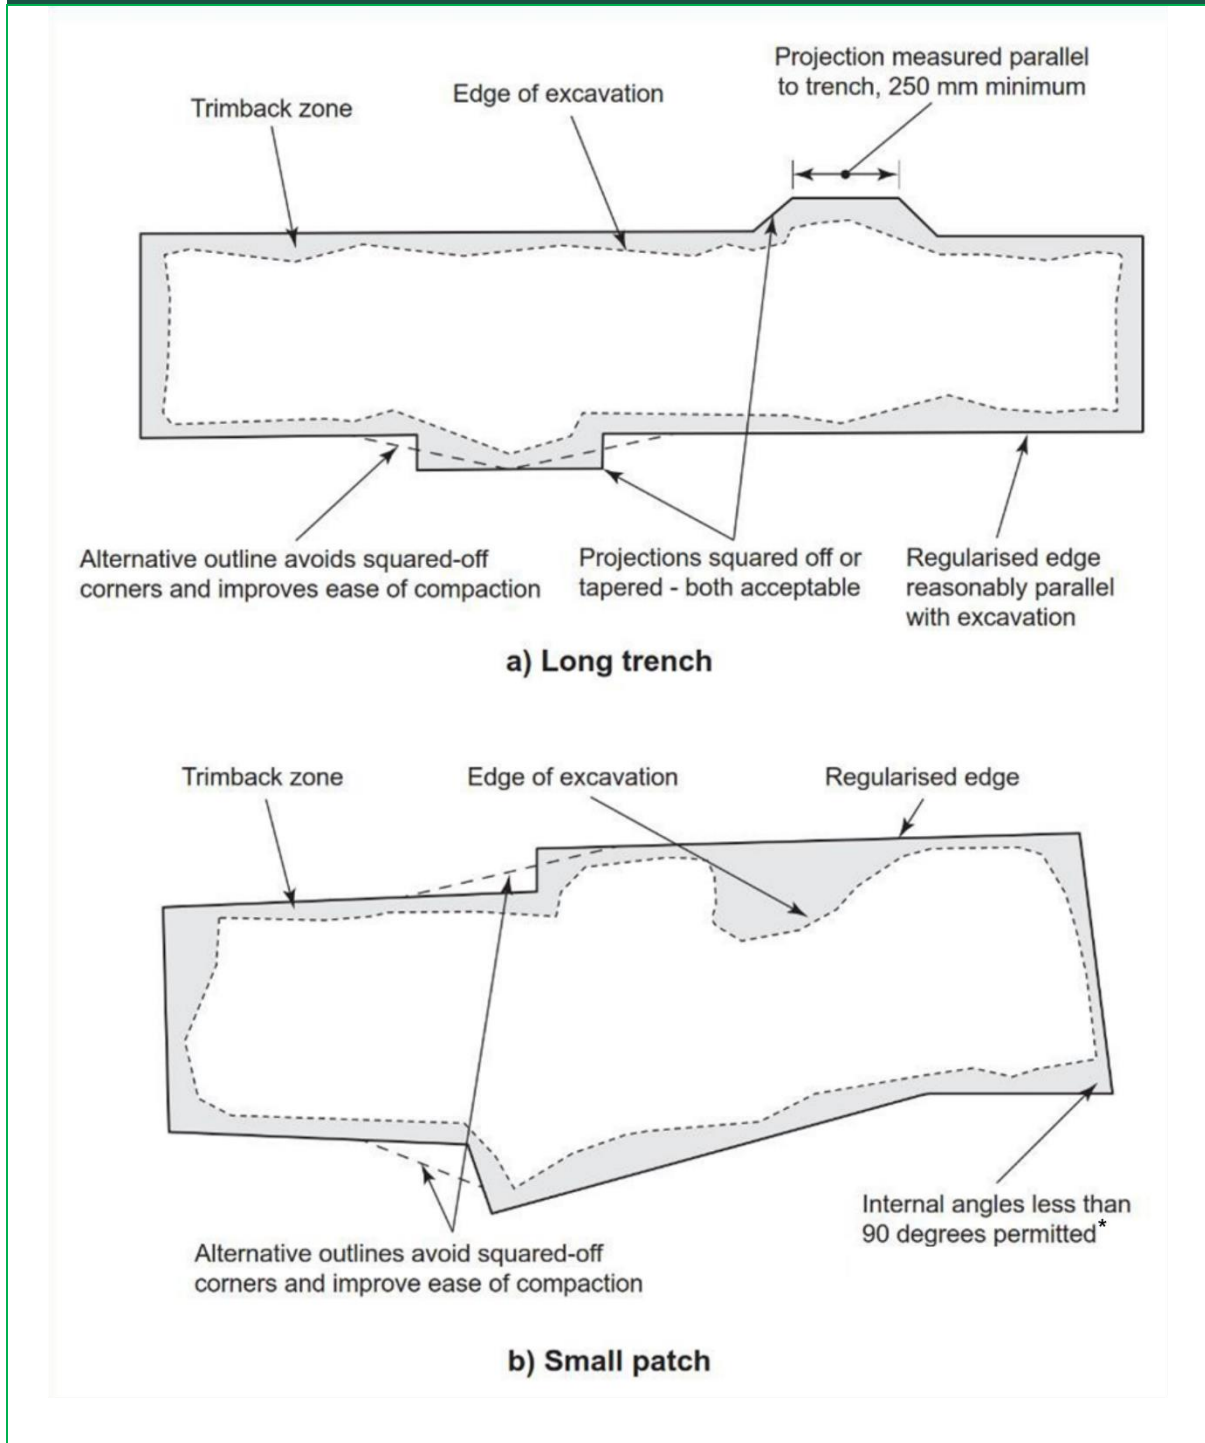


Figure S6.2

* subject to Section [S6.5.2.1](#).

S6.5.2.2 Edge Sealing

- a) All edges shall be adequately prepared prior to application of edge sealant e.g. free of contamination, loose material, and the like. In all cases the manufacturer's instructions shall be followed.
- b) At any interim stage and at the time of permanent reinstatement, the top 100 mm, at least, of all bound vertical edges at surface course and binder course levels, and the equivalent area on kerbs and exposed fixed features, must be painted with a bitumen based edge sealant or otherwise prepared with an edge sealing system or equivalent material. There must be no significant splashing, spillage or any deliberate over-painting of the adjacent road surface, subject to the requirements of Section [S11.7](#).
- c) Tack coat, bond coat or overbanding material shall not be used as an edge sealant unless otherwise specified in Section [S6.4.7.3](#).
- d) There should be visible evidence of the use of sealant. The fact that a core may separate is not, on its own, evidence that no edge sealant has been used.

S6.5.2.3 Proximity to Road Edges and Fixed Features

- a) Where the "trimmed" edge of any excavation is within 250 mm of the road edge, kerbing, other fixed features or another reinstatement, the trim-line shall be extended to the interface with the road edge, kerbing etc. See [Figure S6.3](#).
- b) The additional reinstatement area required by extending the trim-line may be confined to the surface course, provided the lower layers have not been damaged.

- c) Where an existing fixed feature is immediately adjacent to another fixed feature (e.g. road gully, valve cover, etc.) material selection shall be appropriate to ensure adequate compaction and surface profile – Section [S2.2.1 c\)](#) refers.

Figure S6.3 Edge Requirements and Trim Lines in Carriageways

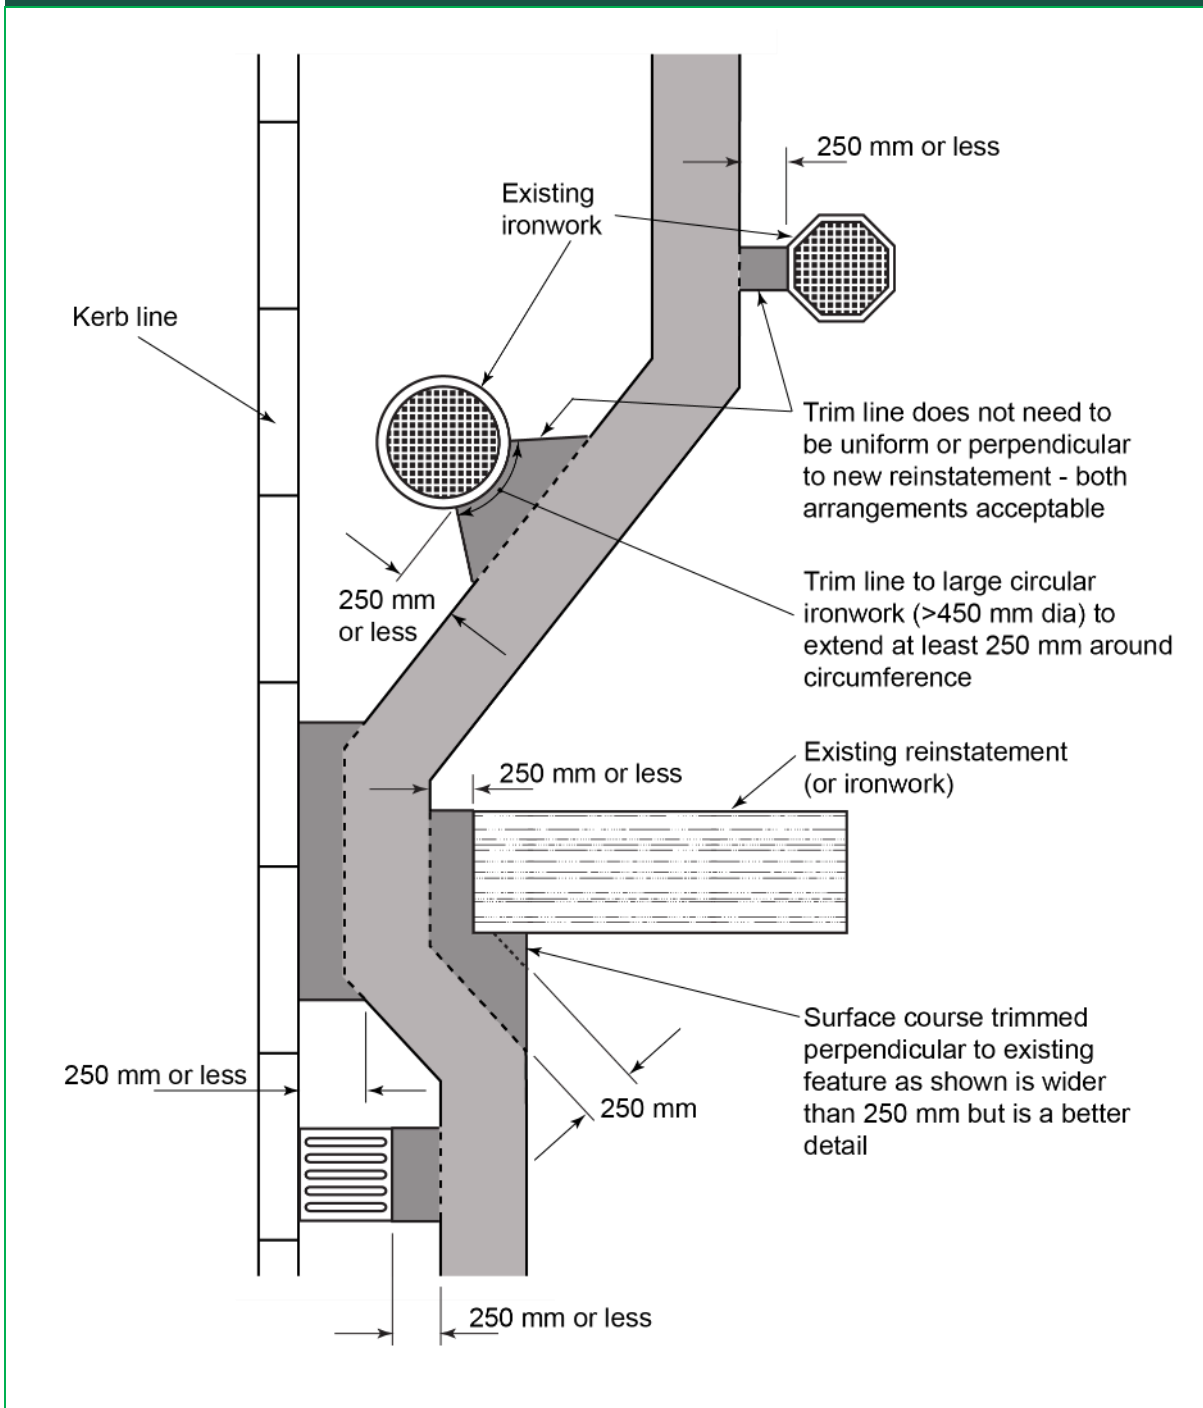


Figure S6.3

S6.5.2.4 Undercutting

All bound edges shall be essentially smooth and vertical with no significant undercutting, as shown in [Figure S6.4](#).

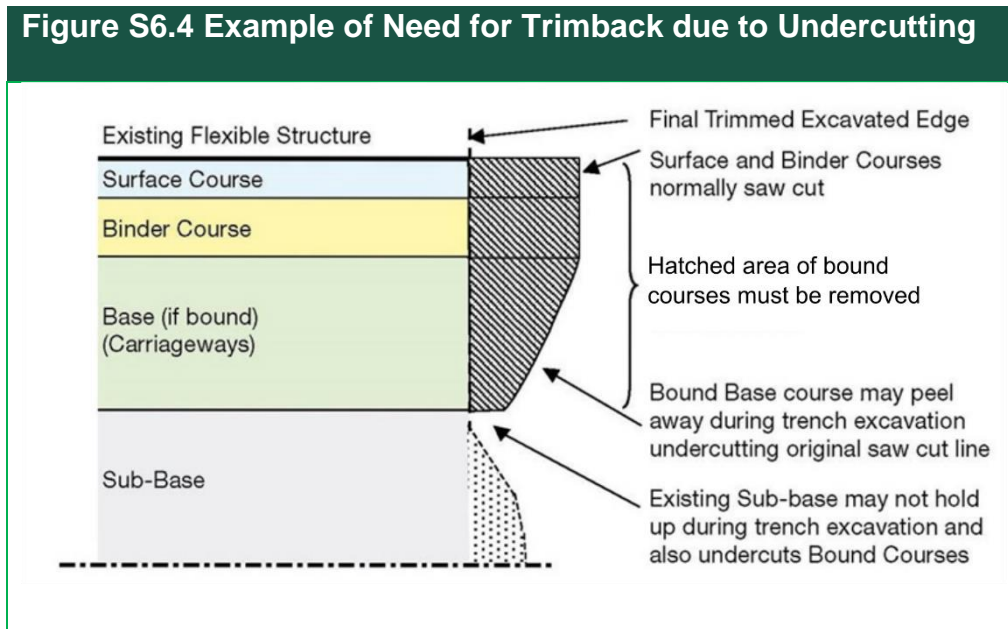


Figure S6.4

S6.5.2.5 Stepped Joints

On Type 0, 1 and 2 roads where it is the custom and practice of an Authority to cut back the surface and/or binder course to provide a stepped profile when undertaking maintenance works then this shall be notified to the Undertaker. Subject to the agreement of the Authority the stepped joint shall be applied to reinstatements in Type 0, 1 and 2 roads subject to the following:

- a) Small reinstatements and narrow transverse trenches shall be excluded.
- b) The stepped profile shall match the Authority's policy subject to a maximum of 75 mm step – see [Figure S6.5](#).

Figure S6.5 Stepped Joint in Flexible Carriageway Types 0, 1 and 2

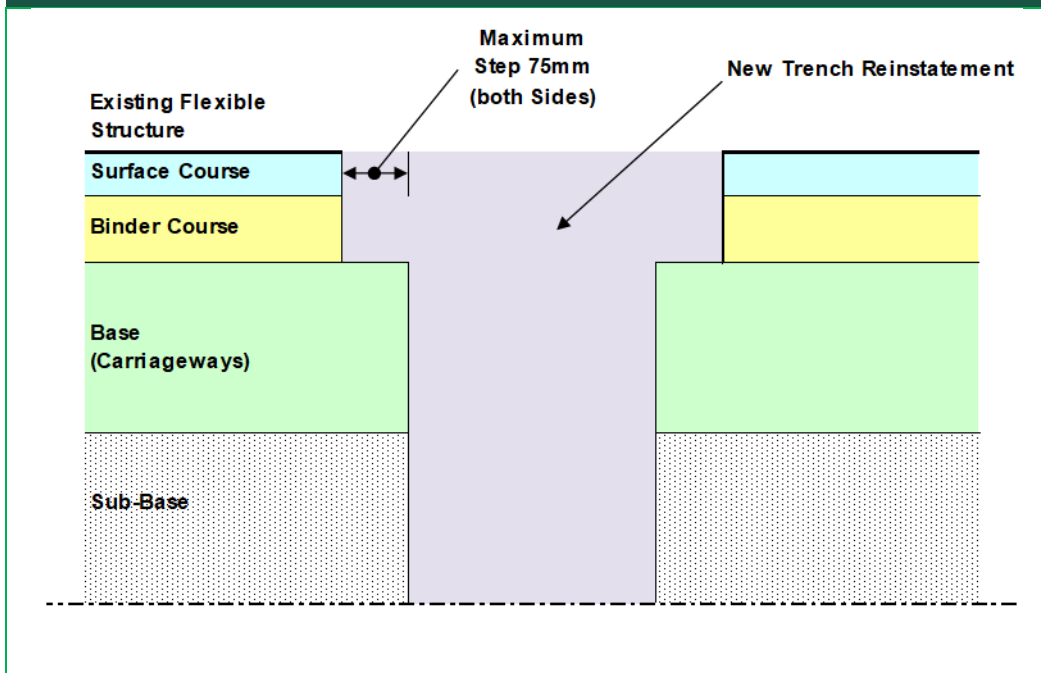


Figure S6.5

S6.6 Tolerances

- S6.6.1 Tolerances for all bituminous materials permitted in [Appendix A2](#) are contained in that Appendix.
- S6.6.2 Tolerances for bituminous materials not included in [Appendix A2](#) shall be by agreement.

S7 Rigid and Modular Roads

S7.1 Reinstatement Methods

S7.1.1 General

- S7.1.1.1 When the total thickness of any bituminous overlay is 100 mm or more, it shall be reinstated as a composite road in accordance with Section [S6](#).
- S7.1.1.2 Some modern road constructions incorporating special design philosophies are outside the scope of this Specification and reference should be made to Notes for Guidance [NG7.1](#).
- S7.1.1.3 The Undertaker shall carry out the reinstatement in accordance with one of the following methods and should endeavour to achieve the greatest degree of immediate permanent reinstatement. Reinstatement methods are listed in [Table A2.6](#).
- S7.1.1.4 Permitted materials and layer thickness are specified in [Appendix A1](#), [Appendix A2](#), [Appendix A5](#), [Appendix A9](#), [Appendix A11](#) and [Appendix A12](#).
- S7.1.1.5 Where the Authority is aware of a carriageway that is either composite or rigid they should inform the Undertaker of the detail of construction (e.g. existence of reinforcement, grouting, etc.), prior to the commencement of works, and/or place information detailing these as a Special Engineering Difficulty on the Gazetteer, so that an appropriate reinstatement method can be agreed.
- S7.1.1.6 For laybys, offset bus stops and car parking areas where the Authority knows of non-standard construction likely to be affected by an Undertaker's work, they should inform the Undertaker, prior to the commencement of works, and/or place information detailing these as a Special Engineering Difficulty on the Gazetteer, so that an appropriate action can be agreed.

S7.1.1.7 If the Undertaker is not informed of an unusual method of construction prior to the commencement of works, but encounters these during the works, they should inform the Authority immediately so that an appropriate reinstatement method can be mutually agreed.

S7.1.1.8 Where the Authority knows of any site with high sulphate levels, dangerous toxins or contaminants it should advise Undertakers in advance of the works so that appropriate measures may be taken. Ideally this information should be stored on the Scottish Road Works Register (as a Special Engineering Difficulty for dangerous toxins and contaminants) where it is available to all Undertakers and Authorities. Similarly where an Undertaker discovers any dangerous toxins or contaminants in the ground, it should inform the Local Authority such that they can update the register.

S7.1.2 Method A – All Permanent Reinstatement

The excavation and concrete road slab shall be reinstated to a permanent standard at the first visit. The bituminous overlay shall not be laid until the cured road slab has achieved a minimum crushing strength of 25 N/mm².

S7.1.3 Method B – Permanent Binder Course Reinstatement

Not applicable.

S7.1.4 Method C – Permanent Base Reinstatement

Not applicable.

S7.1.5 Method D – Permanent Sub-base Reinstatement

S7.1.5.1 The backfill and sub-base shall be reinstated to a permanent standard at the first visit.

S7.1.5.2 The concrete road slab and overlay (if existing) shall be reinstated, for the interim period only, with a bound material. The interim surfacing shall be a bound material to a thickness of 100 mm or 50 mm as shown in [Appendix A5](#) and [Appendix A6](#).

S7.1.5.3 On the second visit, all interim materials shall be removed to the top of the sub-base and a permanent concrete road slab reinstated. The road slab shall be in accordance with Sections [S7.3.2](#) and [S7.3.5](#). Any overlay may be reinstated, to an interim standard, in accordance with the relevant requirements of Section [S6.1.4](#).

S7.1.5.4 Any interim overlay shall be removed at a later date, to the top of the concrete road slab, and a permanent overlay reinstated.

S7.1.6 Method E – Permanent Reinstatement incorporating Interim Surface Overlay

S7.1.6.1 Any bituminous surface overlay may be reinstated, to an interim standard, in accordance with the relevant requirements of Section [S6.1.4](#).

S7.1.6.2 Any interim bituminous overlay shall be removed at a later date, to the top of the concrete road slab, and a permanent bituminous overlay reinstated.

S7.2 Sub-base Reinstatement

S7.2.1 General

S7.2.1.1 In a rigid road, the sub-base is deemed to be any layer of imported granular or cement bound material existing immediately below the base of the concrete road slab. Where such a sub-base layer exists, a similar or equivalent material shall be laid to match the existing thickness subject to a minimum thickness of 150 mm.

S7.2.1.2 Permitted options are shown in [Appendix A5](#), subject to the following exceptions:

S7.2.2 Small Reinstatements

A CBGM B sub-base of 150 mm thickness may be used in small excavations and narrow trenches regardless of whether the existing sub-base is cement bound.

S7.2.3 Alternative Reinstatement Materials

Alternative Reinstatement Materials may be laid at sub-base level, in accordance with [Appendix A9](#).

S7.3 Concrete Road Slab Reinstatement

S7.3.1 General

Permitted options are shown in [Appendix A5](#), subject to the following provisions:

S7.3.2 Concrete Specification

S7.3.2.1 The concrete road slab shall be reinstated using C32/40 concrete mixed in accordance with SHW Clause 1001, with an air entrainment admixture used in at least the top 50 mm of the road slab.

Exceptionally, where agreed, the concrete road slab may be reinstated using an alternative material, to suit site conditions, e.g. a high early strength mix may be agreed to allow an earlier re-opening of a heavily trafficked road.

S7.3.2.2 Where concrete is mixed off site, Quality Assurance Certificates detailing the specifications against which the concrete has been ordered and supplied should be obtained by the Undertaker for confirmation of material quality. Where possible, the concrete should be obtained from a plant which holds a valid Quality Assurance Certificate.

S7.3.2.3 In the case of small excavations, a site-batched proprietary mix, to C32/40 concrete may be used.

S7.3.3 Joints

All expansion, contraction and warping joints removed or otherwise damaged during the excavation must be replaced or reconstructed to a similar design, using equivalent materials, at the time of permanent reinstatement.

S7.3.4 Membranes

S7.3.4.1 Any slip membrane shall be reinstated beneath the road slab and a curing membrane shall be used above the road slab.

S7.3.4.2 Impermeable polythene or similar sheeting may be used for both the slip and curing membranes.

S7.3.4.3 Sprayed plastic film may be used as a curing membrane by agreement.

S7.3.5 Texture Depth

S7.3.5.1 For small excavations, narrow trenches and other openings less than 1 m wide, reference shall be made to Section [S2.6.2.3](#) and [Table S2.4](#).

S7.3.5.2 For all other excavations the Authority shall be consulted and a method agreed. The finished surface shall comply with [Table S2.4](#).

S7.3.6 Opening to Traffic

The cured road slab may be opened to traffic as soon as a crushing strength of 25 N/mm² has been achieved.

S7.4 Edge Support and Preparation

The edges of all excavations in rigid roads shall comply with the following requirements:

S7.4.1 Edge Support

Support for the edges of the reinstatement shall comply with one of the following options:

S7.4.1.1 Edge Taper Support

- a) Where the surface of the road slab is the running surface of the road, the excavation shall be delineated by sawing the pavement to a depth of $30 \text{ mm} \pm 10 \text{ mm}$. The remainder of the exposed faces should be rough cut, at an angle of $27^\circ \pm 18^\circ$ to the vertical; see [Figure S7.1](#).
- b) In all other cases, the exposed faces should be rough cut, at an angle of $27^\circ \pm 18^\circ$ to the vertical. Delineation by pavement saw, to a depth of $30 \text{ mm} \pm 10 \text{ mm}$, may also be applied.

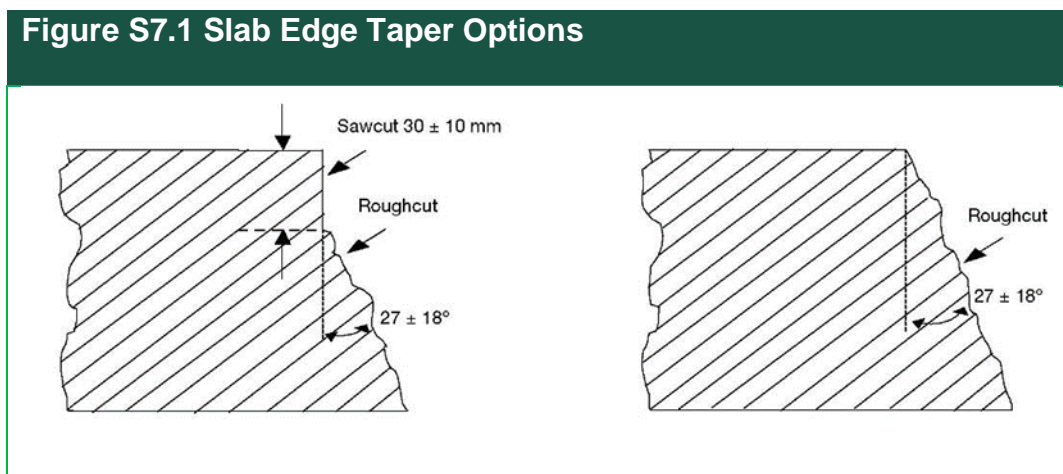


Figure S7.1

S7.4.1.2 Dowel Bar Support

- a) Where the surface of the road slab is the running surface of the road, the excavation shall be delineated by pavement saw, to a minimum depth of 20 mm. Any unsawn section of the slab shall be left roughcut to give an essentially vertical surface; see [Figure S7.2](#).
- b) Where the road is of composite construction or has been overlaid, the exposed faces should be prepared as detailed in [Figure S7.1](#).

- c) In all excavations, a row of horizontal holes shall be drilled along the centreline of the exposed faces, to provide a sliding fit for 20 mm or 25 mm nominal diameter steel dowel bars.
- d) All holes shall be drilled at $600 \text{ mm} \pm 100 \text{ mm}$ centres, with the holes along one face offset or staggered, relative to the opposite face, by at least 200 mm when viewed from above; see [Figure S7.2](#). The nominal hole depth shall be equal to 50% of the dowel bar length $\pm 50 \text{ mm}$.

The maximum dowel bar length shall be 400 mm; minimum dowel bar length shall be equal to the width of the reinstatement less 50 mm.

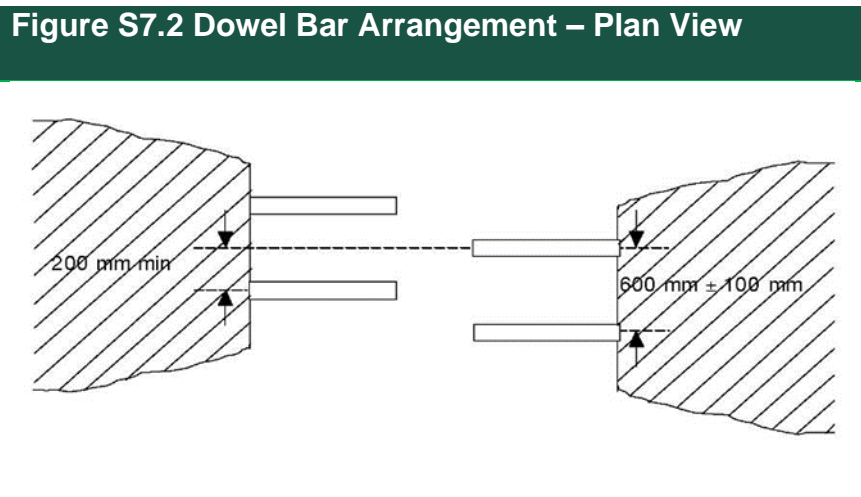


Figure S7.2

S7.4.2 Edge Preparation

The edges of the reinstatement shall be trimmed, where necessary over part or all of the thickness of the concrete road slab, to comply with the following requirements:

- a) The edge regularity shall comply with the requirements of Section [S6.5.2](#).
- b) Any undercutting shall comply with the requirements of Section [S6.5.2.4](#).

- c) Cracking within the adjacent road slab, resulting from the excavation operation, shall require the relevant area of the slab to be removed and included within the area to be reinstated.
- d) Where, following trimming, the excavation extends to within 300 mm of the road slab edge, joint, other reinstatement or ironwork, the relevant area of the slab shall be removed and included within the area to be reinstated.
- e) All edges shall be cleaned and wetted prior to the placement of the concrete.

S7.5 Reinforcement

S7.5.1 Where steel reinforcement within the concrete road slab has been cut, new steel reinforcing of equivalent weight shall be provided, in accordance with the following requirements:

- a) The new reinforcement shall be lapped and wired or welded to the existing reinforcement.
- b) A minimum of 150 mm of the existing reinforcement shall be exposed to allow adequate attachment of the new reinforcement.
- c) Where 150 mm of the exposed reinforcement cannot be preserved during the excavation, the concrete road slab shall be trimmed, as necessary, to expose additional reinforcement. This additional trimming shall not supersede the requirement to provide a slab edge taper or dowel bars.

S7.6 Overlays

S7.6.1 General

S7.6.1.1 Where the surface of the concrete road slab or the modular surface layer is overlaid with a bituminous material or surface treatment, a matching thickness of a similar or equivalent material shall be laid. Note if working

on Flexible or Composite Roads refer to Section [S6.3.4](#).

S7.6.1.2 Wherever practicable, the required surface course thickness should be maintained, by adjustment of the binder course thickness. The surface course and binder course materials shall not be laid to a thickness less than that required by [Appendix A2](#) and [Appendix A3](#) for the nominal size of each material laid.

S7.6.1.3 Where the surface of the concrete road slab or modular surface has had a surface treatment including overlay, an equivalent surface treatment or overlay shall be applied.

S7.6.2 Surface Reinstatement

Permitted options are shown in [Appendix A4](#) and [Appendix A5](#), subject to the following exceptions:

- a) Edge preparation shall be carried out in accordance with Section [S6.5](#), except that the existing edge of the overlay shall be trimmed by a distance equal to the nominal thickness of the surface course, or 40 mm, whichever is the greater.
- b) Surface reinstatement shall be carried out in accordance with the requirements of Section [S6.4](#).

S7.7 Modular Roads

S7.7.1 General

S7.7.1.1 Types 0, 1 and 2 modular roads are not included in this Specification and reinstatement designs shall be in accordance with BS 7533:Part 3.

S7.7.1.2 The Undertaker shall carry out the reinstatement of Types 3 and 4 modular roads in accordance with one of the following methods and should endeavour to achieve greatest degree of immediate permanent reinstatement.

S7.7.1.3 Permitted materials and layer thickness are specified in [Appendix A1](#), [Appendix A2](#), [Appendix A6](#), [Appendix A9](#), [Appendix A11](#) and [Appendix A12](#), subject to the following requirements.

S7.7.1.4 Where modules of natural stone material are present in trafficked roads refer to [Appendix A12](#).

S7.7.2 Method A – All Permanent Reinstatement

The backfill, sub-base (if existing), bedding and modular surface layer shall all be reinstated to a permanent standard at the first visit.

S7.7.3 Method B – Permanent Sub-base Reinstatement

S7.7.3.1 The backfill and sub-base shall all be reinstated to a permanent standard at the first visit, together with an interim granular Base and interim bituminous surface course, as per Section [S6.1.5](#).

S7.7.3.2 On the second visit, the interim reinstatement shall be removed to the top of the sub-base and a permanent Base, bedding and modular surface layer reinstated.

S7.7.4 Sub-base Reinstatement

S7.7.4.1 Permitted options are shown in [Appendix A6](#), subject to the requirements of Section [S6.2](#).

S7.7.4.2 The sub-base shall be reinstated to match the existing, or its structural equivalent.

S7.7.5 Base Reinstatement

S7.7.5.1 Permitted options are shown in [Appendix A6](#), subject to the requirements of Section [S6.3](#).

S7.7.5.2 The Base shall be reinstated to match the existing, or its structural equivalent.

S7.7.6 Surface Reinstatement

The modular surface layer shall be reinstated in accordance with [Appendix A6](#) and [Appendix A12](#). The requirements and recommendations for the provision of replacement modules are given in [Appendix A12](#).

S7.8 Tolerances

S7.8.1 All performance requirements and tolerances permitted in the reinstatement of rigid and modular roads shall be in accordance with the requirements of Section [S2](#) and [Appendix A2](#).

S8 Footways, Footpaths and Cycle Tracks

S8.1 Reinstatement Methods

S8.1.1 General

S8.1.1.1 The Undertaker shall carry out reinstatement in accordance with one of the following methods and should achieve the greatest degree of permanent reinstatement as soon as possible. Reinstatement methods are listed in [Table A2.6](#).

S8.1.1.2 In the event of prior notification by the Authority, where local custom and practice has been to surface footways, footpaths and cycle tracks with aggregates of a certain colour and/or minimum SRV, then the Undertaker shall provide equivalent aggregate, at the time of permanent reinstatement, subject to the requirements of Section [S2.6](#).

S8.1.1.3 Permitted materials and layer thickness are specified in [Appendix A1](#), [Appendix A2](#), [Appendix A7](#), [Appendix A9](#), [Appendix A11](#) and [Appendix A12](#). In all flexible reinstatements, the Surface Course material may also be used at Binder Course level, as shown in [Figure A7.1](#).

S8.1.1.4 Cycle tracks that are part of the carriageway shall be reinstated to carriageway standards.

S8.1.2 Method A – All Permanent Reinstatement

The excavation shall be reinstated to a permanent standard at the first visit.

S8.1.3 Method B – Permanent Binder Course Reinstatement

S8.1.3.1 In flexible structures, the backfill, sub-base and the binder course shall be reinstated to permanent standard at the first visit.

S8.1.3.2 The permanent binder course material, or an alternative interim material, shall be extended to the running surface, with or without a thin separating medium at the binder course/surface course interface. The alternative interim material may be a bituminous mixture.

S8.1.3.3 On the second visit, all interim surfacing materials shall be removed, to the top of the binder course, and an appropriate permanent surface course laid.

S8.1.3.4 Where a sand separation layer is present, prior to the reinstatement of the permanent surface course, the sand shall be removed, to the top of the binder course, the surface brushed clean and a bond coat applied.

S8.1.4 Method C – Permanent Base Reinstatement

Not applicable.

S8.1.5 Method D – Permanent Sub-base Reinstatement

S8.1.5.1 The backfill and sub-base shall be reinstated to a permanent standard at the first visit, with an interim surfacing.

S8.1.5.2 For flexible or rigid structures, the interim surface course and some, or all, of the interim binder course may be a bituminous mixture. The lower portion of the interim binder course may be an unbound granular material.

S8.1.5.3 For modular structures, the interim surfacing may be a bituminous mixture, paving modules or any combination thereof.

S8.1.5.4 On the second visit, all interim surfacing materials shall be removed, to the top of the sub-base, and an appropriate permanent surfacing shall be laid.

S8.2 Sub-base and Binder Course Reinstatement

S8.2.1 General

S8.2.1.1 In a footway, footpath or cycle track, the sub-base is any layer of imported granular or cement bound material existing immediately below the surfacing materials. Where such a sub-base layer exists, a similar or equivalent material shall be laid to a thickness to match the existing, subject to a minimum of 100 mm of GSB Type 1 to clause 803 (Class A Graded Granular Material is a permitted alternative).

S8.2.1.2 Permitted options are shown in [Appendix A7](#), subject to the exceptions described in Sections [S8.2.2](#), [S8.2.3](#) and [S8.2.4](#).

S8.2.2 Small Reinstatements

S8.2.2.1 In small excavations and narrow trenches, the following options shall be permitted, regardless of whether the existing sub-base is a bound material:

- a) A CBGM B sub-base of 100 mm thickness.
- b) A 50/20 HRABC or 20 mm DBC material of 40 mm thickness, laid in place of the granular sub-base layer.
- c) Three equal layers of 15/10 HRASC, 6 mm DSC or 6 mm SMA material may be laid to a total thickness of 100 mm, as a combined sub-base, binder course and surface course.

S8.2.3 Alternative Reinstatement Materials

Alternative Reinstatement Materials may be laid at sub-base level, in accordance with [Appendix A9](#).

S8.2.4 Reinstatements Adjacent to Roads

Where road construction layers, foundation platforms, structural courses, kerb beams and/or backing providing the edge support to the road

structure are found to extend below an adjacent footway, footpath, cycle track or verge, any reinstatement therein shall take account of such provisions.

In such cases, the sub-structure of the footway, footpath, cycle track or verge shall be reinstated to match the existing layer thickness with similar or equivalent materials.

S8.3 Surface Reinstatement

S8.3.1 General

Surface reinstatement options are shown in [Appendix A7](#), subject to the following provisions:

S8.3.2 High Duty and High Amenity Areas

S8.3.2.1 The Authority shall register all high duty and/or high amenity footways, footpaths or cycle tracks and shall identify a suitable source or supplier of reinstatement materials.

S8.3.2.2 The Undertaker shall reinstate all registered High Duty/High Amenity footways, footpaths or cycle tracks with matching materials from the identified source or supplier.

S8.3.2.3 Where aggregates of an especially distinctive colour are encountered and the local custom and practice has been to complete all previous surfacing in a similarly matching material, the reinstatement shall be in accordance with [S6.4.7.4](#).

S8.3.3 Areas Surfaced with Asphalt Concrete

S8.3.3.1 It is preferred footways, footpaths or cycle tracks surfaced with Asphalt Concrete be reinstated with an AC6 dense surf.

S8.3.3.2 A list of permitted materials can be found in Appendix [A2.2.2.1 c](#)).

S8.3.4 Other Asphalt Areas

- S8.3.4.1 Where the Authority has maintained a policy of using and reinstating with a specific type of asphalt surfacing on footways (e.g. mastic asphalt, sand asphalt, etc.), unless otherwise agreed with the Authority, the Undertaker shall take all reasonable measures to reinstate excavations with such material.
- S8.3.4.2 The Authority, when requested, shall provide any details they have on suitable suppliers and specifications. In the absence of such a policy or where no practicable source of supply can be found the reinstatement shall be undertaken in accordance with Section [S8.3.3](#).
- S8.3.4.3 Where the Authority knows of the existence of any of the above materials in areas likely to be affected by an Undertaker's work, they should inform the Undertaker, prior to the commencement of works, and/or place information detailing these as a Special Engineering Difficulty on the Gazetteer, so that an appropriate reinstatement material can be agreed.
- S8.3.4.4 If the Undertaker is not informed of the existence of any of the above materials prior to the commencement of his works, but encounters them during the works, he should inform the Authority immediately so that an appropriate reinstatement material can be mutually agreed. In these circumstances, the Undertaker shall not be liable for the repair of any damage caused to existing materials if their existence was not known.
- S8.3.4.5 All Other Asphalt footways, footpaths or cycle tracks shall be reinstated with permitted material.

S8.3.5 Areas Constructed in Concrete

- S8.3.5.1 Concrete footways, footpaths or cycle tracks shall be reinstated with C25/30 minimum strength concrete, to match the existing thickness. For small excavations, a site-batched concrete of equivalent strength may be used.

- S8.3.5.2 In general, reinstatements in a concrete footway, footpath or cycle track should match the existing surfacing as closely as is practicable.
- S8.3.5.3 Where the Authority knows of any site where air entrained concrete has been used it should be entered on the Scottish Road Works Register as a Special Engineering Difficulty for notification and co-ordination purposes.
- S8.3.5.4 Where the existing concrete has been air entrained, then air-entrained concrete, to SHW Clause 1001, shall be used. Air-entrained concrete may be used elsewhere, at the discretion of the Undertaker.

S8.3.6 Modular Footways, Footpaths and Cycle Tracks

- S8.3.6.1 Modular footways, footpaths and cycle tracks shall be reinstated in accordance with the permitted materials and layer thickness specified in [Figure A7.3](#).
- S8.3.6.2 The modular surface layer shall be reinstated in accordance with [Appendix A12](#). The requirements and recommendations for the provision of replacement modules are shown in [Appendix A12](#).
- S8.3.6.3 Specific to the reinstatement of natural stone modular surfaces, the following shall apply:
- a) Natural stone modules within the area to be excavated shall be removed and stored by the Undertaker for re-use.
 - b) Modules shall be reinstated in accordance with [Appendix A12](#).
 - c) Pre-existing damage may have resulted in fragmentation or breakage of modules. Where the Authority has a policy which seeks to re-use damaged modules, the parts or fragments shall also be removed and stored by the Undertaker for re-use. The Undertaker shall notify the Authority and the method of reinstatement of these materials shall be agreed, including any limitation on the size of the fragments.

d) Where it has been agreed that damaged modules are to be re-used as part of the permanent reinstatement, the surface profile at the end of the guarantee period is not required to be superior to that existing at the time of excavation.

S8.3.6.4 The Undertaker should match existing profiles and meet the tolerances specified in Section [S2](#), but subject also to the limitations outlined in [Appendix A12](#).

S8.3.7 Edge Requirements

S8.3.7.1 For all footways, footpaths and cycle tracks, the edge regularity and any undercutting shall comply with the requirements specified in Sections [S6.5.2.1](#) and [S6.5.2.4](#), respectively.

S8.3.7.2 For all flexible footways, footpaths and cycle tracks, the edge sealing shall comply with the requirements specified in Section [S6.5.2.2](#) and any overbanding shall comply with the requirements specified in Section [S11.7](#).

S8.3.7.3 For all concrete footways, footpaths and cycle tracks, the treatment of any cracking shall comply with the requirements specified in Section [S7.4.2 c](#)).

S8.3.7.4 For all footways, footpaths and cycle tracks, where trim-lines for the reinstatement edges are within 150 mm of an edge, kerb, ironwork or other reinstatements, the trim-lines shall be extended to the interface of the edge, kerb etc. This additional reinstatement may be confined to the surface course provided lower courses have not been damaged. See [Figure S8.1](#).

S8.3.7.5 Fixed features in the footway such as sign posts, lamp columns, valve cover boxes, etc. that are less than 250 mm diameter or 250 mm width on the side facing the reinstatement are exempt from the trim-line extension.

Figure S8.1 Edge Requirements and Trim Lines in Footways

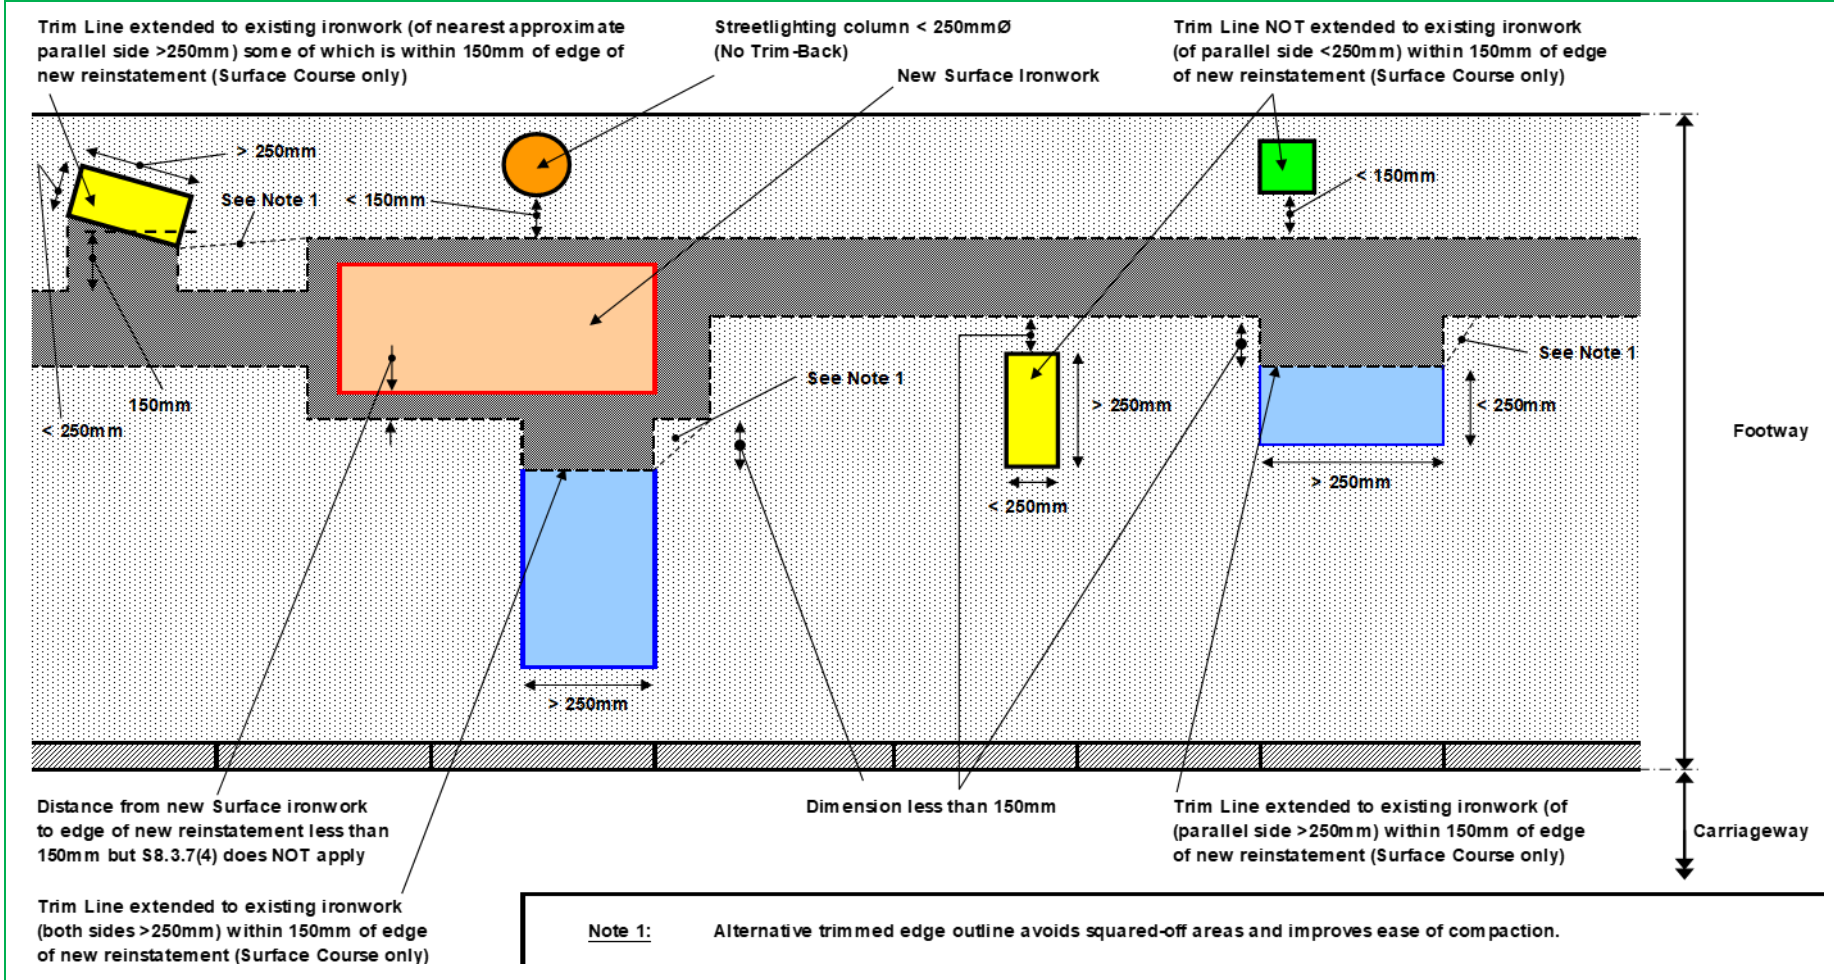


Figure S8.1

S8.3.8 Special Materials

Other specialist surfacing materials shall be reinstated in accordance with Section [S6.4.7.5](#).

S8.4 Vehicular Trafficking

S8.4.1 Commercial Access

S8.4.1.1 Where a recognised route for commercial vehicles crosses a footway, footpath or cycle track, including specified pedestrian areas and precincts, it shall be assumed that provisions for commercial vehicle loading were incorporated in the original design. The relevant area of footway, footpath or cycle track shall be deemed to be a Type 4 road, of flexible, composite, rigid or modular construction, depending on the existing structure.

S8.4.1.2 The reinstatement of such areas shall comply with the relevant requirements of Sections [S6](#) or [S7](#), as appropriate.

S8.4.1.3 Where a special construction has been incorporated within the original design to cater for expected traffic greater than the Type 4 limiting capacity, the Undertaker should consult the Authority.

S8.4.2 Domestic Access

S8.4.2.1 Where a recognised domestic vehicle crossing or occasional emergency service vehicle access route crosses a footway, footpath or cycle track, including specified pedestrian areas or precincts, the existing structure may include thicker layers, higher quality materials or other strengthening measures.

S8.4.2.2 The reinstatement of such areas shall match the existing layer thickness, with similar or equivalent materials.

S8.4.3 Other Trafficking

- S8.4.3.1 Where a footway, footpath or cycle track, including specified pedestrian areas or precincts, is subjected to regular vehicle overrunning or parking, the existing structure may include thicker layers, higher quality materials or other strengthening measures.
- S8.4.3.2 The reinstatement of such areas shall match the existing layer thickness, with similar or equivalent materials.

S8.5 Tolerances

- S8.5.1 Performance requirements and tolerances permitted in the reinstatement of footways, footpaths and cycle tracks shall be in accordance with the requirements of Section [S2](#) and [Appendix A2](#).

S9 Verges and Unmade Ground

S9.1 General

S9.1.1 All backfill materials shall comply with the requirements of Section [S5](#).

S9.1.2 Topsoil within 200 mm of the surface of the verge shall be stored and re-used. Where insufficient topsoil is available from the excavation, imported topsoil may be used to a depth of 100 mm or to match the existing depth, whichever is the less.

S9.1.3 Care shall be taken to ensure that imported topsoil is not contaminated with non-organic material or noxious weeds.

S9.1.4 The re-use of excavated materials as backfill material in verges and unmade ground is to be encouraged as part of a policy of environmentally sustainable construction.

S9.1.5 Where invasive plant species are identified within the excavated materials, these materials shall not be re-used in the reinstatement. Appropriate advice may be sought from the Authority or SEPA as to the means of permissible disposal.

S9.2 Adjacent Road Structures

S9.2.1 Where road construction layers, that may include structural courses, foundations, kerbs and/or backing that provides edge support to road structures, extend below adjacent verges or unmade ground, any reinstatement therein shall take account of such provisions. The reinstatement of such areas shall match the existing layer thicknesses, with similar or equivalent materials.

S9.2.2 Where there is no such edge support within adjacent verges or unmade ground, any part of the reinstatement of an excavation that comes within 600 mm of the edge of a road, shall include sub-base materials at backfill

level, up to a level where a 45° fall line extending downwards from the road surface intersects the side of the trench nearest the road, as shown in [Figure S9.1](#).

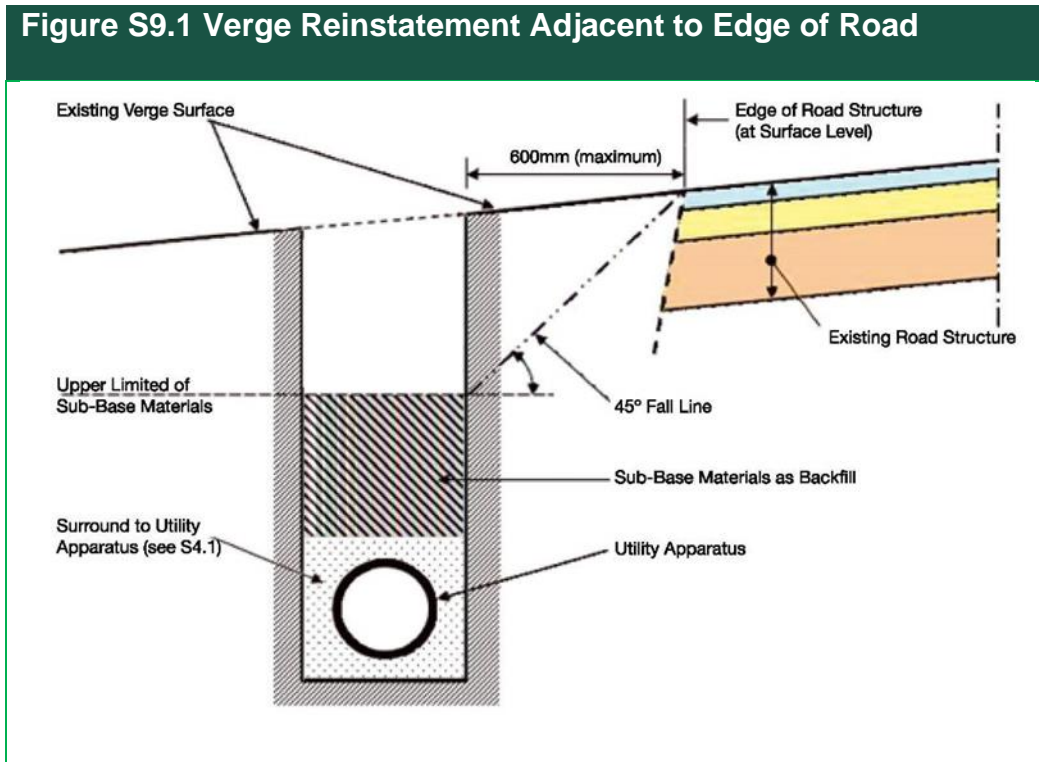


Figure S9.1

S9.3 Cultivated Areas

S9.3.1 Unless otherwise agreed, cultivated areas containing shrubs, plants or bulbs shall be reinstated using the same or similar species. Thereafter, a reasonable growth shall be established within the following 12 months. Where the Authority knows of special features in verges (e.g. orchid sites etc.) it should inform the Undertaker in order to agree the best means of conserving the special features.

S9.4 Grassed Areas

S9.4.1 Grassed areas shall be reinstated using the original turf, replacement turf or an equivalent seed, depending on weather and growing season. In all cases, a reasonable growth shall be established within the following 12 months.

S9.4.2 Where grassed areas have previously been mown, the reinstated surface shall be demonstrably left free from stones greater than 20 mm nominal size. All other debris arising from the works shall be removed from the site. It should be recognised that stones in grassed areas tend to migrate to the surface over a period of time and this should not lead to repeated intervention.

S9.5 Verges, Ditches and Drainage Courses

S9.5.1 Verges, ditches and drainage courses shall be restored to their original profile, unless otherwise agreed.

S10 Compaction Requirements

S10.1 Introduction

S10.1.1 All compaction equipment covered by this Specification shall be checked, adjusted, maintained and operated in accordance with working practices, maintenance schedules, operating procedures and vibrating frequencies recommended by the equipment manufacturer. Relevant records demonstrating to the Authority that the Undertaker is using calibrated equipment shall, be provided on request within a reasonable period of time to the Authority.

S10.1.2 All equipment and operating procedures used for the compaction of all reinstatement materials laid above the surround to apparatus shall comply with the requirements of this section.

S10.2 Compaction of Materials

S10.2.1 **General**

For all materials, compaction shall be carried out in accordance with the requirements of [Appendix A2](#) and/or [Appendix A8](#), immediately after the material has been placed.

S10.2.2 **Unbound Granular and Cohesive Materials**

S10.2.2.1 All Class A Graded Granular Materials, Class B Granular Materials and Class C Cohesive/Granular Materials shall be compacted in accordance with the relevant requirements of [Table A8.1](#).

S10.2.2.2 All Class D Cohesive Materials shall be compacted in accordance with the relevant requirements and restrictions of [Table A8.1](#).

S10.2.2.3 Where access is restricted, including small excavations and trenches less than 200 mm wide, compaction shall be in accordance with the restricted access provisions of [Table A8.1](#).

S10.2.3 Alternative Reinstatement Materials

S10.2.3.1 Certain Structural Materials for Reinstatements (SMRs) and Stabilised Materials for Fill (SMFs) may not require the full compaction specified in [Table A8.1](#) and may be damaged if compaction is continued. Such materials should be placed and compacted in accordance with the manufacturer's recommendations and with due regard to the requirements of [Appendix A9](#).

S10.2.4 Bituminous Materials

S10.2.4.1 All bituminous materials permitted by Appendix A2 shall be laid and compacted in accordance with the relevant requirements of Table A2.1, Table A2.3 and Table A2.4, and Section A8.3.

S10.2.4.2 The in-situ air voids content for all bituminous materials as permitted in [Appendix A2](#) shall comply with the requirements shown in [Table S10.1](#). The maximum density shall be determined in accordance with BS EN 12697-5 Procedure A, in water. For reference purposes and in the event of dispute the bulk density shall be determined in accordance with BS EN 12697-6 Procedure C sealed specimens. The maximum density and core bulk density shall be used to determine air void content in accordance with BS EN 12697-8.

S10.2.4.3 All surface course materials used at binder course level shall comply with the in-situ air voids content requirement for the relevant surface course material.

S10.2.4.4 To determine the in-situ air void content, core samples shall be taken at a rate of one per 6 m² or part thereof. All core samples shall be 100 mm minimum diameter with no part of any core being within 100 mm of either the edge of the reinstatement or within 300 mm of any fixed feature. Where there is a potential to encounter the edge of the frame or apparatus then this distance should be increased accordingly.

Table S10.1 In-Situ Air Voids Content Requirements

Bituminous Materials	Permitted Air Voids			
	Carriageways		Footways	
	Max %	Min %	Max %	Min %
AC 6 dense Surface Course	NP	NP	13.0	2.0
AC 10 close Surface Course	11.0	2.0	NP	NP
HRA Surface Course	7.0	2.0	10.0	2.0
SMA Surface Course	8.0	2.0	10.0	2.0
AC Binder Course	10.0	2.0	12.0	2.0
HRA Binder Course	9.0	2.0	12.0	2.0
SMA Binder Course	6.0	2.0	NP	NP
Permanent Cold-Lay Surfacing Materials (PCSM)	10.0	2.0	13.0	2.0
Any other bituminous materials within the Specification	Guidance on compaction contained in NGA8.3 refer to manufacturers recommendations			

Table S10.1

NP = not permitted

S10.2.4.5 Unless agreed otherwise, all air voids testing shall be carried out by a laboratory holding current UKAS accreditation for the specified test methods.

S10.2.4.6 Where the prevailing weather conditions or other site circumstances are considered likely to mitigate against the successful laying and compaction of any surfacing materials and the achievement of the required in-situ air voids content, consideration should be given to deferring the permanent surface reinstatement and, if necessary, to an agreed extension of the interim reinstatement period.

S10.2.5 Cementitious Materials

S10.2.5.1 Pavement quality concrete, laid as the surface slab of road, footway, footpath or cycle track reinstatements, shall be compacted using a proprietary vibrator, selected and operated in accordance with the manufacturer's recommendations. However, proprietary vibrators may be unsuitable for concrete sections less than 100 mm wide or less than 0.5

square metres in area. In such cases, as a minimum requirement, all concrete shall be thoroughly tamped by hand.

S10.2.5.2 Cement-bound granular materials, including CBGM B shall be compacted in accordance with the relevant requirements of [Table A8.1](#).

S10.2.6 Modular Surfacing Materials

Compaction equipment shall be operated in accordance with the manufacturer's instructions.

S10.3 Equipment Operation and Restrictions

S10.3.1 General

S10.3.1.1 All compaction equipment shall be used in accordance with the requirements of [Appendix A8](#).

S10.3.1.2 A single pass of any compaction plant shall be deemed to be completed when the foot, roll or plate of the compactor has impacted the entire surface area of the layer.

S10.3.1.3 Where the excavation width is more than 50 mm greater than the foot, roll or plate width (i.e. side clearances between the compacting surface and the wall of the excavation exceed 25 mm per side), two or more traverses of the compaction device shall be required to ensure coverage of the entire surface and all shall be deemed to constitute a single pass.

S10.3.1.4 Compaction plant shall be steered along a line offset from that steered on the previous pass so that alternate passes are run close in to each side wall of the excavation.

S10.3.1.5 Additional guidance on compaction procedures is included in Section [NG10.3](#).

S10.3.2 Hand Rammers

S10.3.2.1 Hand rammers shall only be permitted to assist the initial placement of material, or used as described in Sections [S2.2.1 c\)](#), [S10.2.3](#) and [S10.2.5.1](#).

S10.3.2.2 For all materials, full compaction shall be applied, in accordance with the relevant requirements of [Appendix A8](#).

S10.3.3 Percussive Rammers

Percussive rammers shall be permitted for the compaction of reinstatement materials, in accordance with the following requirements:

- a) The nominal mass shall not be less than 10 kg.
- b) The width of the foot shall not exceed 200 mm.
- c) The contact length of the foot shall not exceed 200 mm.

S10.3.4 Vibrotampers

Vibrotampers shall be permitted for the compaction of reinstatement materials, in accordance with the following requirements:

S10.3.4.1 50 kg Minimum Nominal Mass

- a) The width of the foot shall not exceed 5 mm per kg of the nominal mass.
- b) The contact length of the foot shall not exceed 350 mm nor be less than 175 mm.
- c) The foot contact area shall not exceed 1000 sq mm per kg of the nominal mass.
- d) The mass of any extension leg shall not exceed 10% of the nominal mass.

S10.3.4.2 25 to 50 kg Nominal Mass – permitted in areas of restricted access only

- a) The width of the foot shall not exceed 150 mm.
- b) The contact length of the foot shall not exceed 200 mm.

S10.3.5 Vibrating Rollers

Vibrating rollers shall be permitted for the compaction of reinstatement materials, in accordance with the following requirements:

S10.3.5.1 Single-Drum Vibrating Rollers

- a) Single drum vibrating rollers shall include a mechanical means of applying vibration to the roll. Single-drum rollers without a specific vibration unit shall be considered to be single-drum deadweight rollers and shall not be permitted for reinstatement purposes.
- b) The minimum mass of a single-drum vibrating roller shall be 600 kg per metre (kg/m) width.

S10.3.5.2 Twin-Drum Vibrating Rollers

- a) Twin-drum vibrating rollers shall include two vibrating drums. Twin-drum rollers in which only one drum vibrates shall be considered to be single-drum vibrating rollers.
- b) The minimum mass of a twin-drum vibrating roller shall be 600 kg/m width.

S10.3.5.3 All Vibrating Rollers

- a) The mass per metre width of a vibrating roller shall be calculated by dividing the total mass supported by the roll(s) by the total width of the roll(s).

- b) A minimum mass of 600 kg/m width is required for vibrating rollers for the compaction of bituminous material. Where existing roads, footways, footpaths or cycle tracks may be marked or otherwise damaged by the use of 600 to 1000 kg/m vibrating rollers, the Authority shall notify the Undertaker accordingly, whereupon the use of lower weight vibrating rollers shall be agreed.

S10.3.6 Vibrating Plate Compactors

Vibrating plate compactors of 1400 kg/m² minimum mass shall be permitted for the compaction of reinstatement materials.

S10.3.7 Other Compaction Equipment

Other compaction equipment, including machine-mounted compactors and all other compaction devices not specifically referenced within [Appendix A8](#), may be permitted for the compaction of reinstatement materials, subject to the requirements of Section [NG10](#).

S11 Ancillary Activities

S11.1 Traffic Signs, Road Markings, Studs and Verge Markers

S11.1.1 General

S11.1.1.1 Prior to the opening of any works to traffic, all traffic signs, road markings, studs and verge markers removed during the works shall be reinstated to a permanent or temporary standard. Temporary traffic signs, road markings, studs and verge markers shall be permitted for a maximum of 15 working days following completion of the permanent reinstatement.

S11.1.1.2 All traffic signs, road markings, studs and verge markers removed during works shall be reinstated at their original location, wherever possible. Where any traffic signs, road markings, studs or verge markers cannot be reinstated at their original locations, they shall be permanently reinstated to a new layout in accordance with the Traffic Signs Manual: Chapter 5 and the Traffic Signs Regulations & General Directions following agreement with the Authority.

S11.1.1.3 Where the layout of existing traffic signs, road markings, studs or verge markers is not in accordance with the Traffic Signs Manual: Chapter 5 and the Traffic Signs Regulations & General Directions, and the Authority notifies the Undertaker prior to the commencement of works, the layout of all traffic signs, road markings, studs or verge markers to be reinstated following the works shall be determined by agreement. In this event, if the Authority provides any new traffic signs, studs or verge markers, to replace obsolete or previously damaged items removed during the works, then the Undertaker shall install such items as part of the permanent reinstatement of the works.

S11.1.2 Traffic Signs, Studs and Verge Markers

Wherever possible, all traffic signs, studs and verge markers removed during the works shall be re-erected or re-installed on completion. Where the original items cannot be re-erected or re-installed, they shall be replaced using items of equivalent type, colour, performance and dimensions.

S11.1.3 Road Markings

S11.1.3.1 General

- a) Prior to permanent reinstatement, temporary road markings may be applied using quick drying, durable paint, adhesive strip or like materials of similar colour and dimensions to the original markings.
- b) Road markings removed during the works shall be permanently reinstated using materials of equivalent colour and dimensions.
- c) Except where otherwise specified by the Authority, the retro-reflectivity and skid resistance of all yellow and white lines shall comply with BS EN 1436, as follows:
 - i) Dry retro-reflectivity to Table 3:

Yellow – Class R0

White – Class R2
 - ii) Wet skid resistance to Table 7:

Yellow – Class S1

White – Class S3
- d) Unless otherwise agreed by the Authority, all white thermoplastic road markings shall be treated with surface-applied glass beads so as to achieve the performance requirements in Sections i) & ii) above.

- e) Hot-applied thermoplastic road marking materials with synthetic resin binder shall be laid to the following thickness:
 - i) Screed lines – 3.5 mm ± 1.5 mm
 - ii) Sprayed yellow edge lines (No Waiting, etc.) – 0.8 mm minimum
 - iii) Sprayed lines, other than yellow – 1.5 mm minimum
 - iv) Extruded lines – 3.0 mm ± 0.5 mm
- f) Cold applied road markings (e.g. Methylmethacrylate) may be used as an alternative to hot-applied thermoplastic materials provided that they at least match the appropriate BS EN 1824 durability and BS EN 1436 performance requirements as set out in this Section.
- g) The performance requirements for permanent road marking materials shall have been established from road trials in accordance with BS EN 1824. The material used to reinstate road markings shall be in accordance with [Table S11.1](#).

Table S11.1 Performance Requirements for Road Markings	
Road Type	Required Roll-over Class (BS EN 1824 Table 1)
0	P5
1 to 4 & f'ways/cycletracks	P4

Table S11.1

S11.1.3.2 Small Reinstatements

Road markings for small excavations (as defined in Section [S1.5.2](#)) shall meet the criteria in Section [S11.1.3](#). Alternative materials may be used, subject to the following:

- a) Road marking tape may be used in place of thermoplastic markings or marking paint – individual tape lengths shall be no more than 2.5 m in length.

- b) Pre-formed thermoplastic markings may be used in place of hot applied thermoplastic materials – individual lengths shall be no more than 2.5 m in length.
- c) No alternatives may be used in place of specialist materials such as rib markings without the prior approval of the Authority.

S11.2 Street Furniture and Special Features

S11.2.1 Street furniture and other special features, such as tactile paving removed to facilitate road works, shall be replaced in the same position and layout before opening the road to traffic and pedestrians. Items removed to facilitate road works must be carefully stored and maintained during the works. Advice on replacement may be provided by the Authority.

S11.3 Traffic Sensors, etc.

S11.3.1 Where excavation is planned at or near to traffic sensors etc., advice regarding precautions to avoid damage shall be sought from the relevant Authority before work commences. Traffic Sensors should be recorded in the Gazetteer.

S11.4 Water-related Matters

S11.4.1 Sewers, Drains and Tunnels

S11.4.1.1 An Undertaker executing road works that involve breaking up or opening a sewer, drain or tunnel that is vested in or owned by another responsible Authority shall obtain the approval of that Authority before executing the works to their reasonable requirements and satisfaction.

S11.4.1.2 In the case of a public sewer, the “responsible Authority” shall mean the sewerage Undertaker (i.e. the water service company for the relevant area).

S11.4.1.3 In the case of any other sewer, drain or tunnel, the “responsible Authority” shall mean the owner (or the Authority, body or person) responsible for

the management or control of the sewer, drain or tunnel.

S11.4.2 Water Egress (Road Surface and Utility Apparatus)

Notes for Guidance are provided to cover situations where water issues from the road surface or an Undertaker's apparatus.

S11.5 Ironwork and Apparatus

S11.5.1 Access Covers, Frames and Surround

The installation, construction and maintenance of apparatus such as access covers and frames are an integral part of road works. Works undertaken to apparatus shall be to the standard and specification of the owner of the apparatus (see Section [NG11.5.1](#)).

S11.5.1.1 Trimback

The width of trimback shall be dependent on the reinstatement and comply with the following:

a) Reinstatement Materials which do not require compaction

If reinstatement materials are being used which do not require compaction e.g. rapid cure concrete, flowable mastic asphalt, etc. then a minimum width of trimback will be required. Typically, it will be 50 mm in excess of the flange width e.g. a frame which has a 150 mm base will require 200 mm width of trimback.

b) Reinstatement Materials which require compaction

If reinstatement materials are being used that require compaction e.g. granular sub base, hot rolled asphalt, etc. then the width of trimback required will be the width of the frame base plus the width of the compaction tool sole plate plus 50 mm. (e.g. a frame which has a 150 mm flange will require 350 mm width of trimback to accommodate a compaction tool sole plate of 150 mm.) This is not to be confused with

the proximity rule at [S6.5.2.3](#).

S11.5.1.2 Excavation

- a) Edge preparation of the excavation shall comply with Section [S6.5.2](#) for flexible roads and Section [S7.4.2](#) for rigid and modular roads.
- b) All loose excavation material and the existing frame shall be removed and the structure prepared to receive the new frame.
- c) All loose supporting materials e.g. proprietary packing materials, engineering bricks etc., shall be removed.

S11.5.1.3 Reinstatement Materials

- a) Within 350 mm of the edge of the access chamber frame cover, bedding material, including C32/40 strength concrete, may be used to fill the excavation to within 100 mm of the road surface.
- b) A suitable edge sealant shall be applied, and where necessary a primer applied to the frame and bedding materials.
- c) All bedding materials shall be allowed to cure prior to the application of the surfacing.
- d) To provide longevity of service life in high stress areas such as braking and turning areas, consideration should be given to the use of proprietary flowable mastic asphalt.

S11.6 Test Holes

S11.6.1 General

Test holes greater than 150 mm diameter are regarded as excavations and shall be reinstated to comply with this Specification. Test holes of nominal 150 mm diameter or less are not excavations for the purposes of this Specification and shall be reinstated to a permanent standard within 10 working days of completion of all associated work on the site.

- a) Prior to reinstatement, all test holes should be made safe and maintained in a safe condition.
- b) Test holes up to and including 25 mm diameter shall be immediately reinstated to a permanent standard.
- c) Test holes larger than 25 mm diameter may be reinstated to an interim standard, if required.
- d) In modular surfaces, when it is practicable to lift the modules, preference should be given to the lifting of individual modules prior to the drilling of test holes. When it is not reasonably practicable to lift modules or the surface is classed as 'high amenity' the modules should be drilled. Where possible the hole should be on the joint of 4 modules.
- e) In unmade ground, test holes shall be tamped closed or filled with appropriate materials.

S11.6.2 50 mm Diameter or Less

Test holes shall be reinstated to finish flush with the surface by any of the following methods:

- a) Using a fine aggregate, bound with cement or bitumen for the upper layers, as appropriate, and compacted in layers of 100 mm thickness, or less.
- b) Using a self-compacting proprietary product.
- c) Using a flexible sealing plug. The void beneath the flexible sealing plug shall be reinstated using sand and cement mix or a proprietary product.
 - i) In bituminous surfaces, all sealing plugs shall be coloured black (or dark grey).

- ii) In modular or concrete surfaces, sealing plugs shall be coloured as appropriate.
- d) If a flexible sealing plug should become dislodged during the guarantee period, the Undertaker shall replace the plug.
- e) The various methods of reinstating the hole should be coloured as closely as possible to match the existing surface.

S11.6.3 50 to 150 mm Diameter

In paved surfaces, test holes shall be reinstated using a fine aggregate, appropriately compacted in layers of 100 mm thickness, or less, and surfaced with appropriate cementitious, cold or hot-lay bituminous materials to finish flush with the surface. This should be coloured as closely as possible to match the existing surface.

S11.7 Overbanding

S11.7.1 Overbanding or coating of the road surface at the interface between the existing road and the reinstatement edge is not encouraged, but where carried out it shall be undertaken in accordance with the following requirements:

- a) The minimum skid resistance value (SRV), or Pendulum Test Value (PTV), for all overbanding materials shall be 55.
- b) The SRV/PTV shall be measured in accordance with BS EN 13036: Part 4 except that the narrow slider shall be used over the full 126 mm sliding length utilising the normal slider scale C.
- c) Overbanding shall not exceed 3 mm thickness nor 40 mm width. Properly applied overbanding may be subject to spreading and may eventually wear away under trafficking. Overbanding which displays these characteristics shall not require intervention.

- d) Overbanding shall not be used as a substitute for any edge sealing required in accordance with Section [S6.5.2.2](#).
- e) All materials used for overbanding shall have a current Product Acceptance Scheme Approval Certificate. In the event that no such approvals have been issued, then it shall not be used without the approval of the Authority, which shall not be unreasonably withheld. There shall be no departure from the performance requirements at the time of application.

S12 Remedial Works

S12.1 General

S12.1.1 The Undertaker shall be responsible for ensuring that reinstatements comply with the required performance criteria throughout the interim reinstatement and guarantee periods.

S12.1.2 When determining whether a reinstatement requires any remedial action, reference should be made to Section [S2](#).

S12.2 Safety Requirements

S12.2.1 Should a reinstatement fail any safety requirements of this Specification, the surface shall be restored to comply with such requirements, in accordance with Section 130 of NRSWA.

S12.3 Repair of Cracking

S12.3.1 When determining whether cracking requires any remedial action, reference should be made to Section [S2.9](#).

S12.3.2 Cracking shall be repaired in accordance with the following methods:

- a) Cracks of between 2.5 mm and 10 mm open width at the surface shall be repaired by filling with a flexible bituminous sealant, subject to the requirements of Section [S11.7](#).
- b) Cracks between 10 mm and 15 mm open width at the surface shall be repaired by filling with a flexible bituminous sealant incorporating suitable fine aggregate filler, subject to the requirements of Section [S11.7](#).
- c) Cracks greater than 15 mm open width shall be repaired using the procedure described in Section [S12.3.3](#) a) & b) below.

S12.3.3 Two re-sealing operations, excluding the original sealing, shall be permitted during the guarantee period. Further significant cracking of the third seal shall require a surface repair, as follows:

- a) The surfacing materials shall be removed to the full depth of the surface course or to 40 mm depth, whichever is less; for the full length of the crack or for 1 metre length, whichever is greater. If the crack extends into the binder course layer, the affected materials shall be removed and replaced in accordance with Section [S6.4](#).
- b) Surfacing materials shall be removed over sufficient width to ensure that the repair patch extends beyond the edges of the crack, by a minimum distance equal to the nominal thickness of the replacement surface course. The minimum width of the repair patch shall be 100 mm.
- c) Inclusion of a geosynthetic material at the base of the repair patch could assist in limiting any reoccurrence of cracking.
- d) The replacement surface course patch shall be laid in accordance with Section [S6.4](#).

S12.3.4 Where, as a result of Undertaker's works, a crack requiring repair in accordance with Section [S12.3.3](#) exists within 300 mm of another similar crack repair, the intermediate area shall be included in the new repair.

S12.3.5 Cracking within High Friction Surfacing

Where cracks appear in High Friction Surfacing provided that it is well bonded to the substrate and with the agreement of the Authority, the cracking may be sealed using a suitable epoxy or similar resin and the high friction surfacing made good. Guidance on this should be sought either from the system supplier or the Product Acceptance Scheme Certificate.

S12.4 Repair of Settlement beyond Reinstatement Limits

S12.4.1 Where significant settlement of the surface beyond the edges of the reinstatement can reasonably be shown to have occurred as a direct result of the Undertaker's works, the effective width of the reinstatement shall be revised to include the actual width of the settled area. The relevant requirements of this Specification shall apply over the revised width of the reinstatement.

S12.4.2 The extent of any significant settlement beyond the reinstatement limits shall be assessed, by agreement, from consideration of the following:

- a) The apparent extent of any excessive areas of standing water following heavy rainfall; or
- b) The apparent extent of any significant deterioration of highway shape compared with the existing profile remote from the excavation; or
- c) The true extent of any significant deterioration of highway shape determined by profile measurements taken before and after the Undertaker's works.

S12.5 Repair of Other Significant Defects

S12.5.1 The requirement for, and extent of, any repair shall be determined, by agreement, from a consideration of the existing and adjacent surfaces.

S12.5.2 Where it can reasonably be shown that a repair is required, as a direct result of the Undertaker's works, the Undertaker shall carry out remedial actions, as necessary.

S13 Narrow Trenching

S13.1 Definitions

S13.1.1 For the avoidance of doubt, as elsewhere in this Code:-

Narrow trenches: all trenches of surface width between 100 mm – 300 mm (75 mm – 300 mm with authority approval), with a surface area greater than 2 square meters.

Road: any reference to a road includes in carriageways, footways, cycleways and verges.

S13.2 General

S13.2.1 A narrow trench is expected to be 100 mm wide, with an absolute minimum width of 75 mm with prior authority approval. Slot cutting trench widths of less than 75 mm is not permitted¹.

S13.2.2 Given the practical challenges of using and compacting traditional backfill materials in narrow trenches, it is recommended that foamed concrete is used as backfill material, where the topography permits its use.

S13.2.3 Where foamed concrete is not used, and subject to points a), b) and c) below, narrow trenches may be constructed using any of the materials permitted under in this code, providing they comply with the associated standards for excavation, backfill, compaction and ancillary activities. In relation to any aggregates selected as detailed in Section [S5](#) to form part of the backfill material, these shall either:-

- a) have a maximum dimension which is 75 mm, or for narrow trenches less than the expected 100 mm width, is no more than 2/3 of the width

¹ This does not prohibit typical Roads Authority activity in relation to sacrificial loops etc.

of the narrow trench. For example, in a narrow trench with a width of 75 mm, aggregate having a maximum dimension of no more than 50 mm should be used.

- b) where any aggregates do not conform with point a) above, these should only be used with the prior approval of the relevant roads authority.
- c) in all situations, a) or b) above, the material shall be compacted in accordance with the requirements of [Appendix A8](#), using modified compaction equipment.

S13.2.4 In general terms, the principles applied to open cut excavation in this specification shall be adopted for narrow trenching. For example, Section [S6.5.2.1](#), Edge Regularity applies.

S13.2.5 Narrow trenching can be used in carriageways, footways, cycleways and verges subject to achieving the recommended minimum depths of cover detailed in [Table S13.1](#). Trenchless techniques should always be considered as the preferred alternative to traditional excavation.

S13.2.6 Narrow trenching shall not be used in areas of “bad ground” as defined in Section [S2.8](#), including Class E material such as peat.

S13.2.7 Performance intervention requirements detailed in Section [S2](#) apply equally to narrow trenches.

S13.2.8 In roads with special engineering difficulties (“SEDs”) recorded in the Scottish Road Works Register (Scottish Road Works Register), including on bridge decks, narrow trenching shall not be used without the prior agreement of the roads authority.

S13.3 Encounters with Rock

S13.3.1 Where rock is encountered, a site visit shall be arranged with the roads authority to agree any variation to this specification.

S13.3.2 Roads authorities may pre-agree variations to minimise the number of site visits in areas of variable ground conditions. Utility companies must confirm their understanding of any agreement given by a roads authority prior to commencing their road works and record details in the Scottish Road Works Register as an SED local agreement.

S13.4 Depth of Cover

S13.4.1 Notwithstanding any local agreements in accordance with Section S13.2, the required minimum depths of cover to apparatus where narrow trenching is used shall be in accordance with [Table S13.1](#).

Table S13.1 – Minimum Depth* of Cover for Apparatus			
Apparatus Type	Depth of cover		
	Footway/Footpath	Verge	Carriageway
Electricity - HV	450 mm – 1200 mm	450 mm – 1200 mm	750 mm – 1200 mm
Electricity - LV	450 mm	450 mm	600 mm
Gas	600 mm	750 mm	750 mm
Water-Grey/Non Potable	600 mm – 750 mm	600 mm – 750 mm	600 mm – 750 mm
Water - Firefighting	600 mm – 750 mm	600 mm – 750 mm	600 mm – 750 mm
Oil/Fuel Pipelines	900 mm**	900 mm**	900 mm**
Communications	250 mm – 350 mm	250 mm – 350 mm	450 mm – 600 mm
Water	750 mm	750 mm	750 mm
Water for special purposes (e.g. contaminated ground)	750 mm	750 mm	750 mm
Sewerage	Variable	Variable	Variable

Table S13.1

*All depths are from the surface level to the crown of the apparatus

**All works within 3 m of the pipeline require prior approval

S13.4.2 Actual minimum depths of cover to apparatus shall be evidenced in the Scottish Road Works Register by uploading photographs which are date marked and shall include a means of identifying the depth, e.g. a tape, rule or other scale device depicted within the unfinished excavation.

Appendix A1 Backfill Materials

A1.1 Class A – Graded Granular Materials

A1.1.1 Materials should be well-graded granular material with a uniformity coefficient greater than 10. Material shall, at the time of compaction, be at an appropriate moisture content between +1% and -2% of the optimum moisture content as determined by BS1377: Part 4; Vibrating Hammer Method, Method 3.7, or shall be acceptable when subjected to Field Identification Test No. 3.

A1.1.2 Materials shall show a Los Angeles Coefficient – maximum of LA60 when tested in accordance with BS EN 1097-2. The principal materials that will be excluded are sandstones, weakly cemented gritstones, argillaceous (clay derived) materials, the softer magnesium limestone, oolitic limestone and the majority of chalks.

A1.1.3 Manmade aggregates, e.g. slag, PFAs, clinkers and furnace bottom ash will need individual assessment; it is possible to demonstrate satisfactory performance with some of these materials, even when they fail to meet the 10% fines value requirement.

A1.2 Class B – Granular Materials

A1.2.1 Material at the time of compaction shall be at an appropriate moisture content between +1% and -2% of the optimum moisture content as determined by BS1377: Part 4; Vibrating Hammer, Method 3.7, or shall be acceptable when subjected to Field Identification Test No. 3.

A1.3 Class C – Cohesive/Granular Materials

A1.3.1 Materials with less than 50% granular content by mass shall, at the time of compaction, be at appropriate moisture content between 0.8 and 1.2 times the plastic limit, or be acceptable when subjected to Field Identification Test No. 2.

A1.3.2 Materials with a minimum of 50% granular content by mass, shall at the time of compaction, be at an appropriate moisture content between +1% and -2% of the optimum moisture content as determined by BS1377: Part 4; Vibrating Hammer, Method 3.7, or shall be acceptable when subjected to Field Identification Test No. 3.

A1.4 Class D – Cohesive Materials

A1.4.1 Cohesive materials at the time of compaction shall be at appropriate moisture content between 0.8 and 1.2 times the plastic limit, or be acceptable when subjected to Field Identification Test No. 2.

A1.4.2 Clays that contain insufficient moisture when excavated, or have dried excessively during site storage, as defined by Field Identification Test No. 2, may only be re-used provided that they are wetted to comply with Appendix [A1.4.1](#) and compacted in accordance with [Appendix A8](#) for Class D Cohesive Materials.

A1.4.3 It may be difficult to compact cohesive materials to uniformly achieve an adequate bearing capacity. Undertakers must select a lump size for clays within the limits specified in [Appendix A2](#) and must ensure that all compaction equipment is operated within the requirements of [Appendix A8](#). Failure to comply with [Appendix A2](#) and/or [Appendix A8](#) will result in unacceptable settlement and variable bearing capacity.

A1.4.4 High silt content materials, as defined by Field Identification Test No. 1, shall be compacted in accordance with [Appendix A8](#) requirements for Class D Cohesive Materials.

A1.5 Class E – Unacceptable Materials

A1.5.1 The following materials, listed as unacceptable in SHW Clause 601 paragraphs 2(ii) and 3, shall not be used at any level within the permanent structure of any reinstatement:

- a) Peat and materials from swamps, marshes or bogs.

- b) Logs, stumps and perishable materials.
- c) Materials in a frozen condition. (Such materials, if otherwise suitable, shall be classified as suitable when unfrozen.)
- d) Clays having a liquid limit exceeding 90, determined in accordance with BS1377: Part 2 Method 4, or a Plasticity Index exceeding 65, determined in accordance with BS1377: Part 2, Method 5.4.
- e) Materials susceptible to spontaneous combustion.
- f) Materials having hazardous chemical or physical properties requiring special measures for excavation, handling, storage, transportation, deposition and disposal.

A1.6 Field Identification Tests

A1.6.1 The following identification tests must be carried out immediately prior to the placement and compaction of the backfill material.

Field Identification Test No. 1 – Silt Identification

High silt content materials can usually be identified by a simple hand test:

- Preparation
- Select a moist sample of the fine material only.
- Test – Silt Identification

With clean dry hands, rub the sample between the palms, remove the excess material by striking the palms together and wait a few minutes for body heat to dry out any material adhering to the hands. Finally, rub hands together briskly.

Result

If no significant quantities of material remains adhering to the palms, i.e. the palms are relatively clean, then the sample tested is essentially a silt.

Note: The proportion of granular material discarded to produce the fine sample must be taken into account when estimating the approximate silt content of the bulk material.

Field Identification Test No. 2 – Clay Condition

Clays suitable for compaction with pedestrian controlled compaction plant can usually be identified by a simple roll test:

Preparation

Select a sample of small lumps of the fine material only, at a moisture content representative of the bulk material.

Test – Clay Condition

With clean dry hands, take the sample and squeeze together in one hand and release. If the sample crumbles away and mostly fails to hold together into a 'ball' then the sample is too dry for compaction. If not, break off part of the ball and roll between the palms or between one palm and any convenient clean dry flat surface, for example the back of a spade. Roll out the sample into a long thin cylinder until it fractures or begins to show significant transverse cracks.

Result

If the strand can be rolled into intact or uncracked lengths that are thinner or longer than a standard pencil, i.e. less than 7 mm diameter or more than 175 mm length then the sample is too wet or too plastic for compaction. Any result between the ball and the pencil is acceptable for use provided the bulk of the material consists of lumps less than 75 mm in size.

Field Identification Test No. 3 – Granular Condition

All granular materials including Type 1 granular sub-base to clause 803 of the SHW must be compacted near to their optimum moisture content. The optimum moisture content can vary considerably depending on the average particle size and to a much smaller extent, on the type of mineral or rock involved. However, a laboratory compaction test is invariably carried out on a sample of material from which the larger particles have been removed. The sample is always compacted in a small smooth sided steel cylinder and the standard methods of compaction bear little similarity with current compaction plant. Experience has shown that the most commonly specified laboratory compaction test i.e. BS1377: Part 4; Vibrating Hammer, Method 3.7 will produce an optimum moisture content result that is, typically, significantly wetter than the field optimum for a granular material that is to be compacted within a trench using a vibrotamper.

Granular materials suitable for compaction by pedestrian controlled plant can usually be identified by a simple visual examination. Typically, the test will identify materials within 1% to 1.5% of the field optimum moisture content depending on the mineral type. Experience has shown that compaction within this visual moisture range will not normally show any significant reduction in compaction performance. The test cannot indicate the actual moisture content of any material but this is rarely of any relevance as far as an operator is concerned.

Preparation

Depending on the size of the stockpile, dig out representative samples from beneath the outer surface, at several positions around the outside in a conical shape.

Test – Coarse Aggregate

Examine several of the medium- and larger-sized particles from each sample extracted.

Result

Material within the target moisture content range will show a dull sheen when viewed obliquely against the light, with all fines adhering to the larger particles, and no free water will be visible. Material at the dry limit will not show the characteristic sheen, fines will not be strongly adherent and many of the fines will be free. Material at the wet limit will begin to show free moisture collecting in surface grooves or amongst the fines, fines will not be strongly adherent and many of the fines will amalgamate as soggy clusters. Any result between the wet and dry limits is acceptable provided the bulk of the sample is reasonably well graded.

Sands used as finefill or as a regulating layer also need to be used near to the optimum moisture content and can be identified by a simple squeeze test.

Test – Fine Aggregate

Take a small representative sample, squeeze in one hand and release.

Result

If the sample crumbles away and mostly fails to adhere together into a 'ball' then the sample is too dry. Any reasonable degree of adherence is acceptable provided no free water is squeezed out.

Field Identification Test No. 4 – Granular Grading

All unbound granular materials must be reasonably well graded; i.e. must contain a range of particle sizes, from fine to coarse, with an adequate proportion of particles of intermediate sizes. A well-graded material can be compacted to give a dense and stable structure of interlocking particles with a low proportion of air voids within the structure.

Preparation

Depending on the size of the stockpile, dig out representative samples from beneath the outer surface at several positions around the outside.

Test – Granular Grading

Spread out each sample and examine under good light.

Result

Class A Graded Granular Materials – should not contain any particles greater than 75 mm nominal size and, in general, should be 50 mm or smaller. Smaller particles down to less than 5 mm nominal size should be present in gradually increasing numbers as the size decreases. Finer particles, from sand size down to dust, should be present and will usually be adhering to the larger particles. Fine particles should be visible adhering to around 30 per cent or more of the surface of the majority of the larger particles.

Class B Granular Materials – should show the same general features as described above but will usually be less well graded overall compared with Class A Graded Granular Materials.

Class C Cohesive/Granular Materials – will usually contain a much larger proportion of fine material. The granular content should still be less than 75 mm nominal size, down to less than 5 mm nominal size and should not be single sized.

Appendix A2 Key to Materials

A2.1 Introduction

A2.1.1 This Specification covers the reinstatement of excavations made by Undertakers. Whilst the Specification captures all forms and sizes of excavations, the substantial majority of reinstatements carried out by Undertakers are small rectangular-type openings and trenches. By implication these reinstatements can be considered to be carried out in restricted or confined areas.

A2.1.2 Undertakers primarily adopt hand laying operations in their reinstatements, rather than machine laying operations, which are allied to new-build and larger surface area situations, i.e. those which are not necessarily restricted or confined. In addition to the final compaction of asphalt layers, hand laying operations also include the on-site transportation and handling of the asphalt materials.

A2.1.3 The preferred and permissible materials set out in this Appendix are predominantly for hand laying operations by Undertakers, and have been selected accordingly, which supports other end-performance criteria, generally set out through the Specification.

A2.1.4 Roads – General

A2.1.4.1 In types 3 and 4 roads for small excavations and narrow trenches, the preferred binder course mixture may be replaced by any surface course mixture that complies with the Specification for the respective road type, provided that the same mixture is used as the surface course, see Section [S6.4.12](#).

A2.1.5 Footways, Footpaths and Cycle Tracks – General

A2.1.5.1 In all excavations, the preferred binder course mixture may be replaced by any surface course mixture that complies with this Appendix and with

Section [S8](#). This substitution is limited solely to the binder course layer. Void contents shall meet the requirements of [Table S10.1](#) for footways.

A2.2 Hot Rolled Asphalt (HRA) Mixtures

A2.2.1 General

A2.2.1.1 All HRA shall conform to BS EN 13108-4. Conformity shall be established in accordance with BS EN 13108-20 and BS EN 13108-21. Natural gravels are not permitted as coarse aggregate for use in Types 0, 1 and 2 roads.

A2.2.1.2 Requirements for deformation resistance as assessed by wheel tracking performance (WTR) are in accordance with PD6691 Appendix C, Table C.3.

A2.2.1.3 Design Type C mixtures listed in this section can be used where there is a record of satisfactory performance from the chosen supplier.

A2.2.1.4 Chippings for surface application to HRA surface course mixtures shall be coarse aggregate conforming to PD 6691 Appendix C, C.2.3 and meet the requirements of C.2.8. The size and grading of chippings shall be 14/20 as in Table C.5. Where the existing surface has 8/14 chippings these may be used in the reinstatement.

A2.2.2 Surface Course Mixtures

A2.2.2.1 The following HRA surface course mixture options are permitted. The preferred HRA mixtures may be replaced by one of the other alternative permitted mixtures.

a) Roads Type 0 and 1

The preferred HRA surface course mixture shall be: HRA 35/14 F surf
PMB des WTR 2

Alternative permitted mixtures are:

- i) HRA 30/14 F surf PMB des WTR 2
- ii) HRA 35/14 F surf 40/60 des WTR 2
- iii) HRA 30/14 C surf 40/60 des WTR 2 (before use refer to [Table A2.1](#))

b) Roads Type 2, 3 and 4

The preferred HRA surface course mixture shall be: HRA 30/14 F surf 40/60 rec WTR 1

Alternative permitted mixtures are:

- i) HRA 35/14 F surf 40/60 des WTR 1
- ii) HRA 30/14 F surf 40/60 des WTR 1
- iii) HRA 30/14 C surf 40/60 des WTR 1 (before use refer to [Table A2.1](#))
- iv) HRA 30/10 F surf 40/60 rec WTR 1 (type 3 and 4 only)

c) Footways, Footpaths and Cycle Tracks

The preferred HRA surface course mixture shall be: HRA 15/10 F surf rec

Alternative permitted mixtures are:

- i) HRA 30/10 F surf rec using 100/150, 70/100 or 40/60
- ii) HRA 30/14 F surf rec using 100/150, 70/100 or 40/60 (before use refer to [Table A2.1](#)).

Design mixes are also acceptable.

A2.2.2.2 Areas which exhibit signs of regular trafficking by commercial vehicles or, such sites notified to the Undertaker by the Authority, shall be reinstated in accordance with Section [S8.4](#). In such situations 100/150 pen material shall not be used.

A2.2.3 HRA Binder Course Mixtures

a) Road Type 0 & 1

The HRA binder course mixture shall be HRA 60/20 F bin 40/60 des WTR 2.

b) Road Types 2, 3 and 4

The preferred HRA binder course mixture shall be HRA 50/20 F bin 40/60.

Alternative permitted mixtures i) and ii) below may be used by agreement where satisfactory local experience has been gained in their use.

i) Openings up to 500 mm width – HRA 50/14 F bin 40/60.

ii) Openings over 500 mm width – HRA 60/20 F bin 40/60.

c) Footways, Footpaths and Cycle Tracks

The preferred HRA binder course mixture shall be HRA 50/20 F bin 100/150 or, HRA 50/20 F bin 70/100 or HRA 50/20 F bin 40/60.

Alternative permitted mixtures i) and ii) below may be used by agreement where satisfactory local experience has been gained in the use of these mixtures.

i) Openings up to 500 mm width – HRA 50/14 F bin 100/150 or, HRA 50/14 F bin 70/100 or HRA 50/14 F bin 40/60.

ii) Openings over 500 mm width – HRA 60/20 F bin 100/150 or, HRA

60/20 F bin 70/100 or HRA 60/20 F bin 40/60.

Areas which exhibit signs of regular trafficking by commercial vehicles or, such sites notified to the Undertaker by the Authority shall be reinstated in accordance with Section [S8.4](#). In such situations the preferred binder course mixture may not be replaced by any carriageway surface course mixture and 100/150 pen material shall not be used.

In areas not subject to vehicular trafficking the preferred binder course mixture may also be replaced by any permitted carriageway surface course mixture.

A2.3 Stone Mastic Asphalt (SMA) Mixtures and Thin Surface Course Systems (TSCS)

A2.3.1 General

A2.3.1.1 SMA shall conform to BS EN 13108-5 and PD 6691. Conformity shall be established in accordance with BS EN 13108-20 and BS EN 13108-21. The following SMA mixtures are permitted by this Specification, depending upon the detail requirements of the relevant section.

A2.3.1.2 Requirements for deformation resistance as assessed by wheel tracking performance (WTR) are in accordance with PD6691 Appendix D, Table D.2 and the note to that table.

A2.3.2 Surface Course Mixtures

A2.3.2.1 The required performance properties are to be set by agreement with the Authority. Some Authorities, e.g. Transport Scotland, will generally require the use of Product Acceptance Scheme certificated Thin Surface Course Systems. e.g. TSCS 14 or TSCS 10.

A2.3.2.2 Where the Authority requires the use of generic SMA mixtures the SMA surface course mixture shall match the existing nominal size unless

otherwise agreed.

a) Roads Type 0 and 1

The permitted mixtures are:

- i) SMA 14 surf PMB WTR 2
- ii) SMA 14 surf 40/60 WTR 2
- iii) SMA 10 surf PMB WTR 2
- iv) SMA 10 surf 40/60 WTR 2

Alternative permitted mixtures subject to the Authority's approval are:

- v) SMA 6 surf PMB WTR 2
- vi) SMA 6 surf 40/60 WTR 2

b) Roads Type 2, 3 and 4

The permitted SMA mixtures are:

- i) SMA 14 surf PMB or 40/60 or 70/100 WTR 1 or 2
- ii) SMA 10 surf PMB or 40/60 or 70/100 WTR 1 or 2

Alternative permitted mixtures subject to the Authority's approval are:

- iii) SMA 6 surf PMB or 40/60 or 70/100 WTR 1 or 2

(see Section [S6.4.3](#))

c) Footways, Footpaths and Cycle Tracks

The permitted surface course mixtures, unless advised otherwise by the Authority, shall be:

- i) SMA 6 surf 40/60

- ii) SMA 6 surf 70/100
- iii) SMA 6 surf 100/150

A2.3.3 SMA Binder Course Mixtures

- a) Roads Type 0 and 1

The preferred SMA binder course mixture shall be SMA 20 bin 40/60 WTR 2.

Alternative permitted mixtures shall be SMA 14 bin 40/60 WTR 2.

- b) Roads Type 2, 3 and 4

The preferred SMA binder course mixtures shall be:

- i) SMA 20 bin 40/60 WTR 1 or SMA 20 bin 70/100 WTR 1.
- ii) Openings up to 500 mm width – as a) or SMA 14 bin 40/60 WTR 1 or SMA 14 bin 70/100 WTR 1.

A2.4 Asphalt Concrete Mixtures

A2.4.1 General

A2.4.1.1 All asphalt concrete shall conform to BS EN 13108-1. Conformity shall be established in accordance with BS EN 13108-20 and BS EN 13108-21.

The following coated mixtures to BS EN 13108-1 and PD 6691 are permitted by this Specification depending upon the detailed requirements of the relevant section.

A2.4.1.2 Where the existing mixture is HDM (Heavy Duty Macadam to the now superseded BS 4987-1) or HMB (High Modulus Base) and the Authority requires the reinstatement to be completed using a similar mixture, the Authority shall notify the Undertaker accordingly.

A2.4.1.3 Requirements for deformation resistance as assessed by wheel tracking performance (WTR) are in accordance with PD6691 Appendix B, Table B.4 and the note to that table.

A2.4.2 **Surface Course Mixtures**

a) All Road Types

The coated surface course mixtures to PD 6691 shall be AC14 or AC10 close surf 70/100 or 100/150. AC14 or 10 close surf can be specified to have binder content (Bact) higher than those specified in PD 6691 Table B.14 and Table B.15 respectively to enhance workability during installation and improve in-service life.

b) Footways, Footpaths and Cycle Tracks

i) The preferred coated surface course mixtures shall be

- AC6 dense surf 70/100, 100/150 or 160/220; or
- AC10 close surf 70/100 or 100/150.

ii) The preferred mixture may be replaced by other agreed, alternative materials where the existing surface is a coated mixture to the or current PD 6691 of aggregate size significantly finer than 6 mm nominal size, see Section [S8.3.4](#).

A2.4.3 **Binder Course Mixtures**

a) Road Type 0 & 1

The preferred binder course mixture to PD 6691 shall be AC 20 dense bin 40/60 WTR 2.

b) Road Types 2, 3 & 4

The preferred binder course mixture to PD 6691 shall be AC 20 dense bin 100/150 WTR 2.

c) Footways, Footpaths and Cycle Tracks

The preferred binder course mixture shall be AC 20 dense bin 100/150 or AC 20 dense bin 160/220.

A2.5 Cold-lay Surfacing Materials

A2.5.1 Permanent Cold-lay Surfacing Materials (PCSMs)

- a) Only PCSMs with a current Product Acceptance Scheme certificate shall be used for the permanent reinstatement of openings not greater than that specified in the Product Acceptance Scheme Certificate or two square metres where the area is not specified in the certificate.

PCSMs shall be stored, transported, handled and used strictly in accordance with the manufacturer's requirements contained in the Product Acceptance Scheme certificate for that material.

Approved PCSMs, laid and compacted in accordance with the Product Acceptance Scheme certificate may be used in substitution for any permitted equivalent bituminous material type, e.g. AC, as follows:

- i) Permanent Cold-lay Surfacing Material (PCSM), at any position, in all reinstatements in footways, footpaths and cycle tracks.
 - ii) Permanent Cold-lay Binder Course (PCBC) in all reinstatements in Type 3 & 4 roads.
 - iii) Permanent Cold-lay Surface Course (PCSC) in all reinstatements in Types 3 & 4 roads.
- b) The required thickness of the PCSM in i), ii) & iii) above shall be as stated in the Product Acceptance Scheme certificate.
- c) Whenever a potential PCSM binder has begun a Product Acceptance Scheme Approval Trial, regardless of aggregate or material formulation under trial, then any material manufactured using that

binder shall be considered to be an approved Deferred Set Material to PD 6691 for interim use only, with immediate effect.

- d) Where an Authority demonstrates an engineering reason for not using a PCSM, the Undertaker shall not use the material without prior agreement.

A2.5.2 Deferred Set Mixtures (DSMs)

- a) Deferred set coated mixtures shall be in accordance with PD 6691 and shall be AC 6 dense surf 160/220 DS (6 mm Surface Course) or AC 10 close surf 160/220 DS (10 mm Surface Course) or AC 20 dense bin 160/220 DS (20 mm dense Binder Course).

The binder grade & amount of flux oil may need to be amended as necessary to meet the performance requirements for surfacing mixtures for the duration of the interim reinstatement period. Advice on this is contained in PD 6691 Appendix B.2.3.

The binder viscosity should be adjusted to give approximately the equivalent to 10 days deferred set.

- b) Deferred set coated mixtures can be used at any position, in all interim and immediate reinstatements, but are not permitted within permanent reinstatements.

A2.6 Flowable materials

A2.6.1 Polymer modified mastic asphalt (PMMA)

A2.6.1.1 PMMA must be CE Marked to BS EN 13108-6 or have a Product Acceptance Scheme Certificate.

A2.6.1.2 PMMA must have the following properties declared:

- a) Grading limits as defined in section 5.2.2 from BS EN 13108- 6:2016.

- b) Binder limits as defined in section 5.2.3 from BS EN 13108-6:2016. In any case, the minimum target binder content (B_{act}) must not be less than 8.0%.
- c) Indentation limits as defined in section 5.3.2 from BS EN 13108-6:2016. The indentation of specimens, determined in accordance with EN 12697-20 or EN 12697-21 using the conditions defined in EN 13108-20:2016, D.14, must not exceed category $I_{max}10.0$

A2.6.2 Foamed concrete for reinstatements (FCR)

- A2.6.2.1 FCRs are cement-bound materials that have been prepared off-site or can be mixed on-site, generally as prescribed mixes, at an approved mixing plant and under appropriate quality control procedures. They are flowable and do not require compaction when placed. FCRs do not necessarily incorporate a coarse aggregate.
- A2.6.2.2 FCRs must not encase apparatus or be used within 300 mm of a gas pipe.
- A2.6.2.3 All aggregate used in FCRs must pass a 6.3 mm sieve and comply with the MP and FP grading limits given in BS EN 12620. Larger size aggregate may be used provided it can be shown to be practicable.
- A2.6.2.4 The composition of recycled aggregate including recycled concrete aggregate must be classified by hand sorting coarse aggregate particles in accordance with BS EN 933-11. The test must be carried out by a suitably trained laboratory technician competent in classifying the constituent classes in accordance with the test method. The content of other materials (Class X) must not exceed 1% by mass or by volume, whichever is the greater.
- A2.6.2.5 FCR permissible constituents must not contain potash or incinerator bottom ash aggregate (IBAA).

- A2.6.2.6 Layer thickness and compressive strength at 7 days requirements must be in accordance with [Table A9.1](#).
- A2.6.2.7 Minimum asphalt overlay thickness as per [Appendix A3](#) to [Appendix A7](#). FCR is not permitted as CBGM base replacement.
- A2.6.2.8 The compressive strength must be determined by testing foamed concrete cubes made in accordance with BS EN 12390-1, except that the FCR must be placed in the mould without any tamping or vibration other than gently rocking the mould on a firm base. Test cubes must be cured in accordance with BS EN 12390-2 and tested for compressive strength in accordance with BS EN 12390-3.
- A2.6.2.9 The compressive strength of FCR must be determined in accordance with the principles of BS EN 12390-3, and the following:
- a) Test specimens may be prepared at the time of placement by casting within a test mould or recovered from site by extracting cores from the reinstatement.
 - b) Specimen shape and dimensions must be in accordance with BS EN 12390-1 with the addition that specimens may also be manufactured with an aspect ratio of 1. Flowable moulds may be manufactured from cellular foam (preferably polystyrene) and include a cellular foam lid. The samples must not be compacted except for minimal tamping to allow the mould to be filled without leaving excessive areas of voids.
 - c) The top and bottom surfaces of core test specimens may be grouted to ensure flat, parallel loading surfaces.
 - d) Following preparation or recovery, the test samples must be stored upright at either 20°C or 40°C, depending on the nature of the material (in accordance with the manufacturer's instructions), and tested in compression at 7 days after placement of the material on site.

- A2.6.2.10 FCRs must be produced to prescribed mix formulations by an approved mixing plant in accordance with approved manufacturing processes under quality control procedures.
- A2.6.2.11 The wet density of FCRs must be checked before placement. Depending on the manufacturer's instructions, the quality of the foaming agent added on site must be checked before being incorporated in the mix. Any on-site addition of a foaming agent must be in accordance with the approved mix design.
- A2.6.2.12 In excavations containing water, the minimum density for foamed concrete is 1050 kg/m³.
- A2.6.2.13 The sub-base and base must not be reinstated over FCR until it has attained sufficient strength to allow compaction of the material.
- A2.6.2.14 FCRs must not be tamped or compacted unless otherwise specified by the manufacturer.
- A2.6.2.15 To avoid FCRs flowing into damaged drains or ducts in or adjacent to the excavation, plastic sheeting or other protective measures must be used during pouring and curing.
- A2.6.2.16 FCRs must be cured for the period specified by the manufacturer. During this period, the reinstatements must be protected.

A2.7 Structural Layer Thickness Tolerances

- A2.7.1 Several individual layers of material, commonly termed "lifts", may be required to reinstate a structural layer.
- A2.7.2 Total bituminous material thickness in total shall not be less than 10 mm below design nominal target. The overall thickness of bituminous material is specified in [Table A11.1](#).
- A2.7.3 The lower tolerance for the thickness of an individual lift of bituminous material shall be as specified in [Table A2.1](#).

A2.7.4 The tolerance for any other structural layer comprising unbound material is -20 mm.

A2.7.5 The upper tolerance for the combined structural layer thickness is not subject to any restriction although the thickness of the surface course is limited as described in [Table A2.1](#). Where large thicknesses of surface course are used:

- a) the requirements for compacted lift thicknesses under Appendix [A2.8](#) shall be met, as shall the in-situ air-voids through the full depth of the as-laid surface course layer, as set out in Section [S10.2.4](#).
- b) the required combined binder course and base material thickness is still required, unless the binder course mixture is replaced with surface course mixture, as permitted by Appendix [A2.1.1](#) and Appendix [A2.1.2](#).
- c) the surface profile performance requirements set out in Section [S2.2](#) shall not be exceeded.

A2.7.6 The combination of permitted tolerances for the thickness of each structural layer of bituminous and/or cement bound mixtures shall not result in any of the following:

- a) An overall reduction in thickness of the bound pavement, excluding the sub-base, of more than 10 mm from the specified nominal thickness in a road, subject to an absolute minimum of 100 mm of bituminous bound materials.
- b) An overall reduction in the thickness of the bound pavement, excluding the sub-base, of more than 10 mm from the specified nominal thickness in a footway, subject to an absolute minimum of 60 mm of bituminous bound materials.
- c) A non-compliance with the Specification if the combined thickness of the relevant layers equals or exceeds that of the Specification

requirements, provided that each individual lift meets the thickness requirements of [Table A2.1](#) or [Table A2.2](#) and the bituminous mixtures meet the void requirements of Section [S10.2.4](#).

A2.8 Compacted Lift Thickness

A2.8.1 General

The compacted thickness of all individual lifts of reinstatement mixtures, within all reinstatement structural layers, shall be in accordance with the following requirements:

A2.8.2 Bituminous Mixtures

The compacted thickness of all individual 'lifts' of bituminous mixtures shall be in accordance with [Table A2.1](#).

Table A2.1 Compacted Lift Thickness (mm) – Bituminous Mixtures

Material Type	PD 6691 Reference	Compacted Lift Thickness (mm)		
		Minimum at any point	Nominal Lift Thickness†	Maximum at any point
6 mm DSC	AC 6 dense surf	15	20 – 30	40
10 mm CGSC	AC 10 close surf	25	30 – 40	50
14 mm CGSC	AC 14 close surf	35	40 – 55	70
15/10 HRA	HRA 15/10 F surf	25	30	50
30/10 HRA (in carriageway)	HRA 30/10 F surf	30	35	50
30/10 HRA (in footway)	HRA 30/10 F surf	25	30	50
30/14 HRA	HRA 30/14 F surf HRA 30/14 C surf	35	40	50
35/14 HRA	HRA 35/14 F surf HRA 35/14 C surf	45	50	60
6 mm SMA	SMA 6 surf	15	20 – 40	45
10 mm SMA	SMA 10 surf	20	25 – 50	55
14 mm SMA	SMA 14 surf	30	35 – 50	55
10 mm Porous Asphalt	No reference*	25*	30 – 35*	40*
20 mm Porous Asphalt	No reference*	40*	45 – 60*	65*
50/20 HRA BC	HRA 50/20 bin	40	45 – 80	100
60/20 HRA BC	HRA 60/20 bin	40	45 – 80	100
14 mm SMA BC	SMA 14 bin	25	30 – 60	65
20 mm SMA BC	SMA 20 bin	40	50 – 100	110
20 mm DBC	AC 20 dense bin	40	50 – 100	110

Table A2.1**Notes**

† Nominal Lift Thickness is the average thickness allowable over the whole reinstatement.

Only 1 lift of surface course material is permitted in any reinstatement except for Small Excavations, Narrow Trenches and Access Chambers in type 3 & 4 carriageways and also for footways as per Section [S6.4.12](#).

* The use of porous asphalt is now very limited in the UK except for specialist uses such as sustainable drainage systems. Where porous asphalt surfaces are encountered refer to Section [S6.4.7.3](#). (BS EN 13108 – 7 contains specifications for this group of asphalts and guidance on the appropriate material should be obtained from the Authority).

A2.8.3 Non-Bituminous Materials

The compacted thickness of all individual ‘lifts’ of non-bituminous materials shall be in accordance with [Table A2.2](#).

Table A2.2 Compacted Lift Thickness – Non-Bituminous Materials			
Material	Compacted Lift Thickness (mm)		
	Minimum at any point	Nominal Lift Thickness	Maximum at any point
CBGM B	75	100 to 150	200
C25/30 Concrete	100	As Required	As Existing
C32/40 Concrete	100	As Required	As Existing
GSB1	75	100 to 150	200
Classes A & B	75	100 to 150	200
Classes C & D	75	100 to 150	200
SMF-A & SMF-B	75	100 to 150	200
SMF-C & SMF-D	75	100 to 150	200

Table A2.2

A2.9 Bituminous Laying Temperatures

The laying temperatures for bituminous mixtures shall be in accordance with [Table A2.3](#).

Table A2.3 Laying Temperatures – Bituminous Materials				
Material	Binder Grade	Maximum Temperature at any Stage (°C)	Minimum Temperatures (°C)	
			Arrival *	Minimum Rolling **
ACCSC	100/150	170	120	95
ACDSC	160/220	170	110	85
ACBC	40/60	190	130	100
	70/100	180	125	95
	100/150	170	120	90
	160/220	170	110	80
HRA SC	40/60	190	140	110
	70/100	180	125	90
	100/150	170	120	85
HRA BC	40/60	190	130	105
	70/100	180	125	90
	100/150	170	120	85
SMA SC	40/60	200	130	100
SMA BC	70/100	180	125	90
	100/150	170	120	85
Porous Asphalt	125	135	110	85
	190	145		

Table A2.3

Note:

* In the lorry within 30 minutes after arrival on site.

For coated slag mixtures temperatures may be 10°C lower than the recommended values.

Greater compactive effort may be required to achieve an acceptable air voids ratio as the temperature approaches the lower limit.

** See [Table A2.4](#) for the final rolling temperatures when chippings are applied to HRA surface courses.

Table A2.4 Final Rolling Temperatures – HRA

Binder Grade	Minimum temperature (°C) at completion of rolling
40/60	85
70/100	80
100/150	75

Table A2.4

Note: When using modified bitumen or additives, different temperatures might be applicable.

A2.10 Identification of Structural Layers

A2.10.1 Road Structures

A2.10.1.1 For the purposes of defining permissible material options, layer thickness etc. this Specification classifies road structures as being of flexible, composite, rigid or modular design. The road structures assumed to be representative of each of these designs are shown in [Figure A2.1](#). For each design, a typical reinstatement structure, identifying the principal structural layers, is also shown.

A2.10.1.2 Permitted materials and layer thickness for road structures are specified as follows:

- a) Flexible Design – see [Figure A3.0](#), [Figure A3.1](#), [Figure A3.2](#), [Figure A3.3](#) and [Figure A3.4](#)
- b) Flexible Sub-structure – see [Figure A3.5](#)
- c) Composite Design – see [Figure A4.0](#), [Figure A4.1](#), [Figure A4.2](#) and [Figure A4.3](#)
- d) Composite Sub-structure – see [Figure A4.4](#) and [Figure A4.5](#)
- e) Rigid Design – see [Figure A5.0](#), [Figure A5.1](#) and [Figure A5.2](#)
- f) Modular Design – see [Figure A6.1](#), [Figure A6.2](#) and [Figure A6.3](#)

All layer thicknesses are in millimetres.

Figure A2.1 Typical Reinstatement Structure within recognised Road Designs

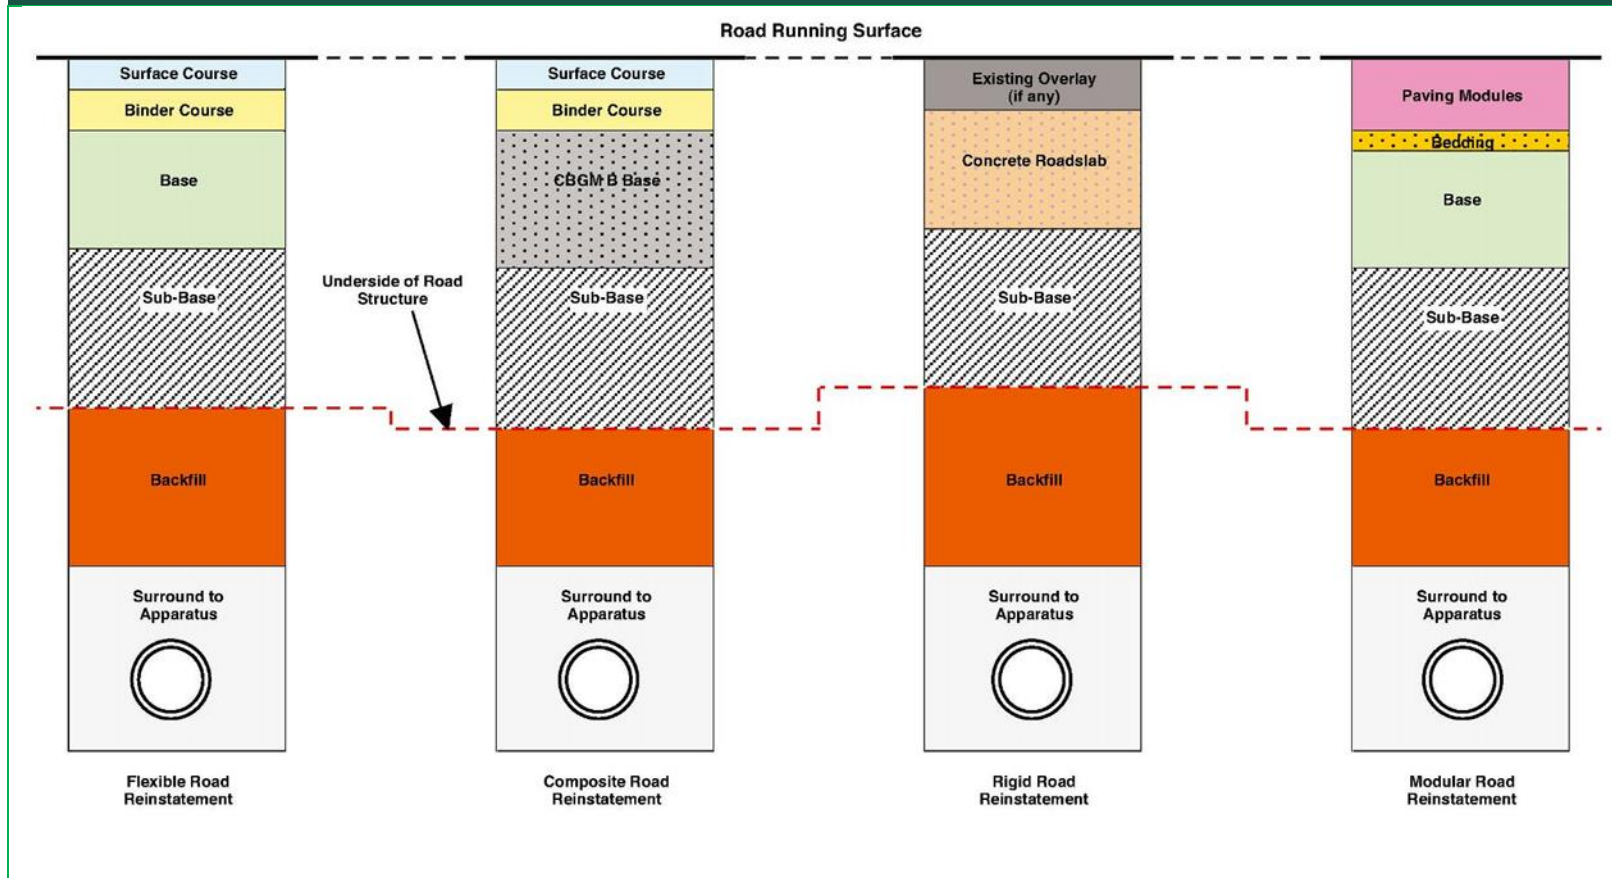


Figure A2.1

A2.10.2 Footway, Footpath and Cycle Track Structures

A2.10.2.1 For the purposes of defining permissible material options, layer thickness, etc. this Specification classifies footway, footpath and cycle track structures as being of flexible, rigid or modular design. The structures assumed to be representative of each of these designs are shown in [Figure A2.2](#). For each design, a typical reinstatement structure, identifying the principal structural layers, is also shown.

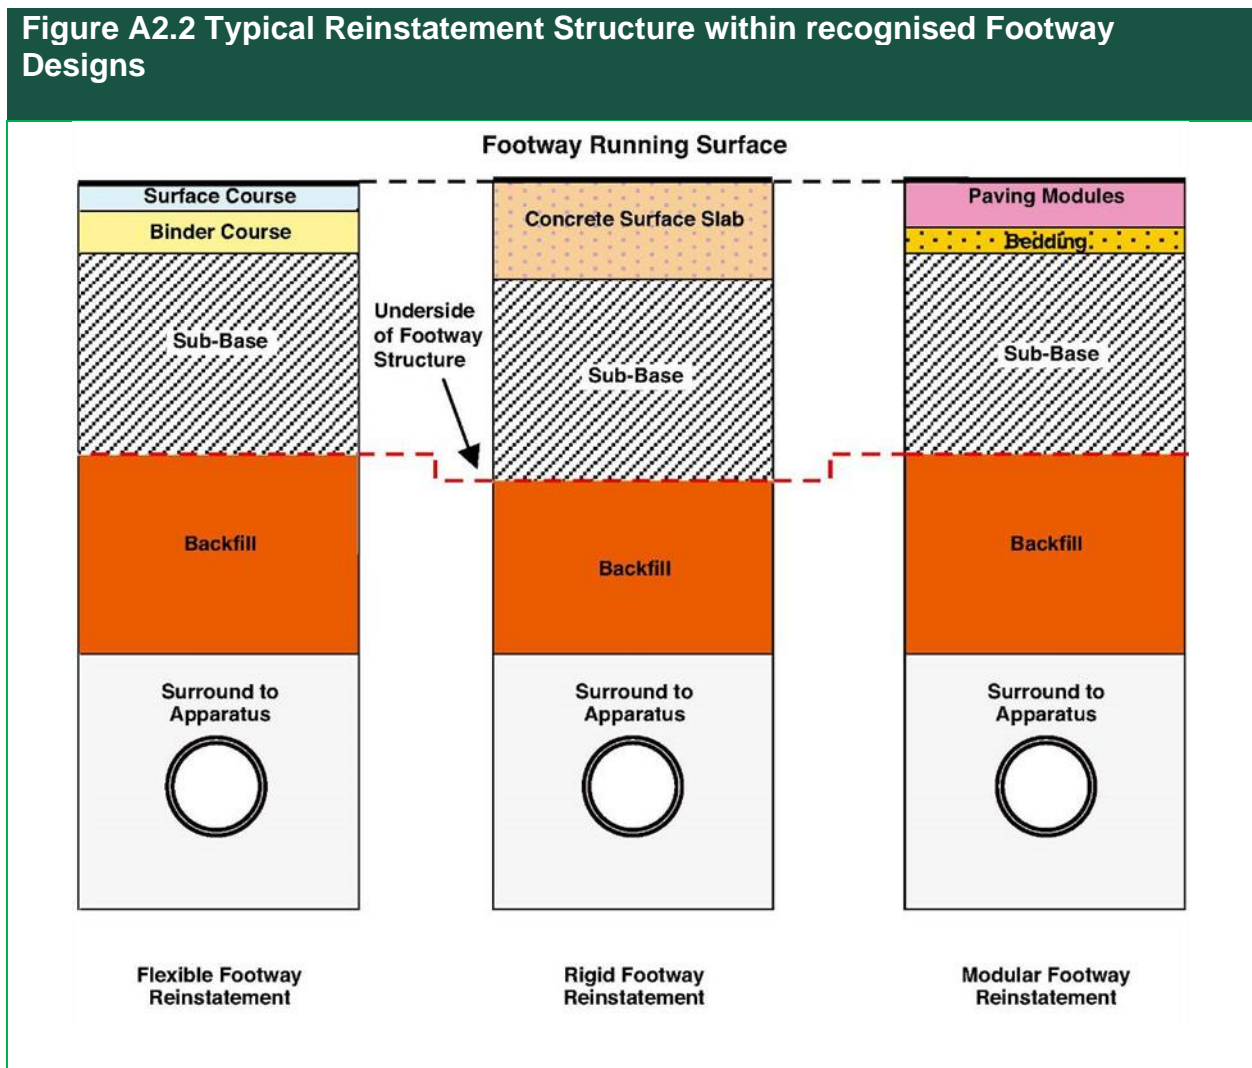


Figure A2.2

A2.10.2.2 Permitted materials and layer thickness for footway, footpath and cycle track structures are specified as follows:

- Flexible Design see [Figure A7.1](#)

b) Rigid Design see [Figure A7.2](#)

c) Modular Design see [Figure A7.3](#)

A2.10.2.3 All layer thicknesses are in millimetres.

A2.11 Key to Materials

A2.11.1 For the purposes of defining the main material options, layer thickness, etc. required by this Specification, [Appendix A3](#) to [Appendix A7](#), inclusive, show the principal structural layers within cross-sections of typical reinstatement designs in each of the main surface categories. Materials are denoted by the symbols in [Table A2.5](#).

A2.11.2 Proprietary asphalt materials are not included in [Table A2.5](#), given their specialist and limited application, an example being flowable mastic asphalts, which may be used in footway surface courses and access surrounds to larger apparatus in roads.

A2.11.3 ARMs are not shown, given the wide range of options and material variations.

A2.12 Key to Reinstatement Methods

A2.12.1 Sections [S6.1](#), [S7.1](#) and [S8.1](#) set out the permissible reinstatement methods for all of the main types of construction categories covered by the Specification. [Appendix A3](#) to [Appendix A7](#), inclusive, indicate different materials and material thicknesses for each permissible reinstatement method, which may also vary between different Road Categories. [Table A2.6](#) summarises these permissible reinstatement methods.

Table A2.5 Key to Reinstatement Materials









	<p>HRASC ACCSC SMASC</p>	<p>HRASC - Hot Rolled Asphalt Surface Course (See Appendix A2.2.2)</p>
	<p>HRASC ACCSC ACDSC SMASC PCSC</p>	<p>SMASC - Stone Mastic Asphalt Surface Course (See Appendix A2.3.2)</p> <p>ACCSC - Asphalt Concrete Close Surface Course (See Appendix A2.4.2)</p> <p>ACDSC - Asphalt Concrete Dense Surface Course (See Appendix A2.4.2)</p> <p>PCSC - Permanent Cold-lay Surface Course (See Appendix A2.5.1)</p>
	<p>HRABC ACBC SMABC</p>	<p>HRABC - Hot Rolled Asphalt Binder Course (See Appendix A2.2.3)</p>
	<p>HRABC ACBC SMABC PCBC</p>	<p>SMABC - Stone Mastic Asphalt Binder Course (See Appendix A2.3.3)</p> <p>ACBC - Asphalt Concrete Binder Course (See Appendix A2.4.3)</p> <p>PCBC - Permanent Cold-lay Binder Course (See Appendix A2.5.1)</p>
	<p>DSM PCSM</p>	<p>DSM - Deferred Set Mixtures (See Appendix A2.5.2)</p> <p>PCSM - Permanent Cold-lay Surfacing Material (See Appendix A2.5.1)</p>
	<p>Concrete</p>	<p>Concrete - Pavement Quality Concrete (To SHW Clause 1001)</p>
	<p>CBGM B</p>	<p>CBGM B - Cement Bound General Material Category B (To SHW Clause 822)</p>
	<p>GSB 1</p>	<p>GSB 1- Type 1 Granular Sub-base Material (To SHW Clause 803)</p>
<p>AAA AAA</p>	<p>CLASS A</p>	<p>Class A - Graded Granular Backfill Material (See Appendix A1.1)</p>
<p>BBB BBB</p>	<p>CLASS B</p>	<p>Class B - Granular Backfill Material (See Appendix A1.2)</p>
<p>CCC CCC</p>	<p>CLASS C</p>	<p>Class C – Cohesive/Granular Backfill Material (See Appendix A1.3)</p>
<p>DDD DDD</p>	<p>CLASS D</p>	<p>Class D - Cohesive Backfill Material (See Appendix A1.4)</p>

Table A2.5

Table A2.6 Key to Reinstatement Methods

Reinstatement Method (At First visit)	Flexible & Composite Roads Section S6		Rigid & Modular Roads Section S7				Footways, Footpaths & Cycle Tracks Section S8		
	Flexible (Figure A3.0 to Figure A3.4 incl.)	Composite (Figure A4.0 to Figure A4.3 incl.)	Rigid (Figure A5.0 to Figure A5.2 incl.)	Modular			Flexible (Figure A7.1)	Rigid (Figure A7.2)	Modular (Figure A7.3)
				Bituminous Base (Roadbase) (Figure A6.1)	Composite Base (Roadbase) (Figure A6.2)	Granular Base (Roadbase) (Figure A6.3)			
All Permanent	Method A (Types 0-4 incl.)	Method A (Types 0-4 incl.)	Method A (Types 0-4 incl.)	Method A (Types 3, 4 only)	Method A (Types 3, 4 only)	Method A (Types 3, 4 only)	Method A	Method A	Method A
Interim with Permanent Binder Course	Method B (Types 0-4 incl.)	Method B (Types 0-4 incl.)	N/A	N/A	N/A	N/A	Method B	N/A	N/A
Interim with Permanent Base	Method C (Types 3, 4 only)	Method C (Types 0-4 incl.)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Interim with Permanent Sub-base	Method D (Types 0-4 incl.)	Method D (Types 0-4 incl.)	Method D (Types 0-4 incl.)	Method D (Types 3, 4 only)	Method D (Types 3, 4 only)	Method D (Types 3, 4 only)	Method D	Method D	Method D
Permanent incorporating Interim Surface Overlay	N/A	N/A	Method E (Types 0-4 incl.)	N/A	N/A	N/A	N/A	N/A	N/A

Table A2.6

A2.13 Summarised Selection Process for Hot Lay Flexible Materials

A2.13.1 Specific to the hot-lay reinstatement of flexible roads and footways (including footpaths and cycle tracks), different parts of the Specification set out the following criteria:


- a) overall class, layer designation and mixture design for Hot Rolled Asphalts, Stone Mastic Asphalts and Asphalt Concretes (Appendix [A2.2](#) to [A2.4](#) inclusive);
- b) different thicknesses of mixture layers ([Appendix A3](#) and [Appendix A7](#));
- c) specific requirements and limitations for surface courses (Sections [S6.4](#) and [S8.3](#)).

The overall process for selecting the correct materials to reinstate flexible roads and footways is particularly more complex at the reinstatement design selection stage. [Figure S0.1](#) provides a generic overview of this process.

Appendix A3 Reinstatement – Flexible Roads

The following figures show the requirement for flexible roads;

Not to Scale

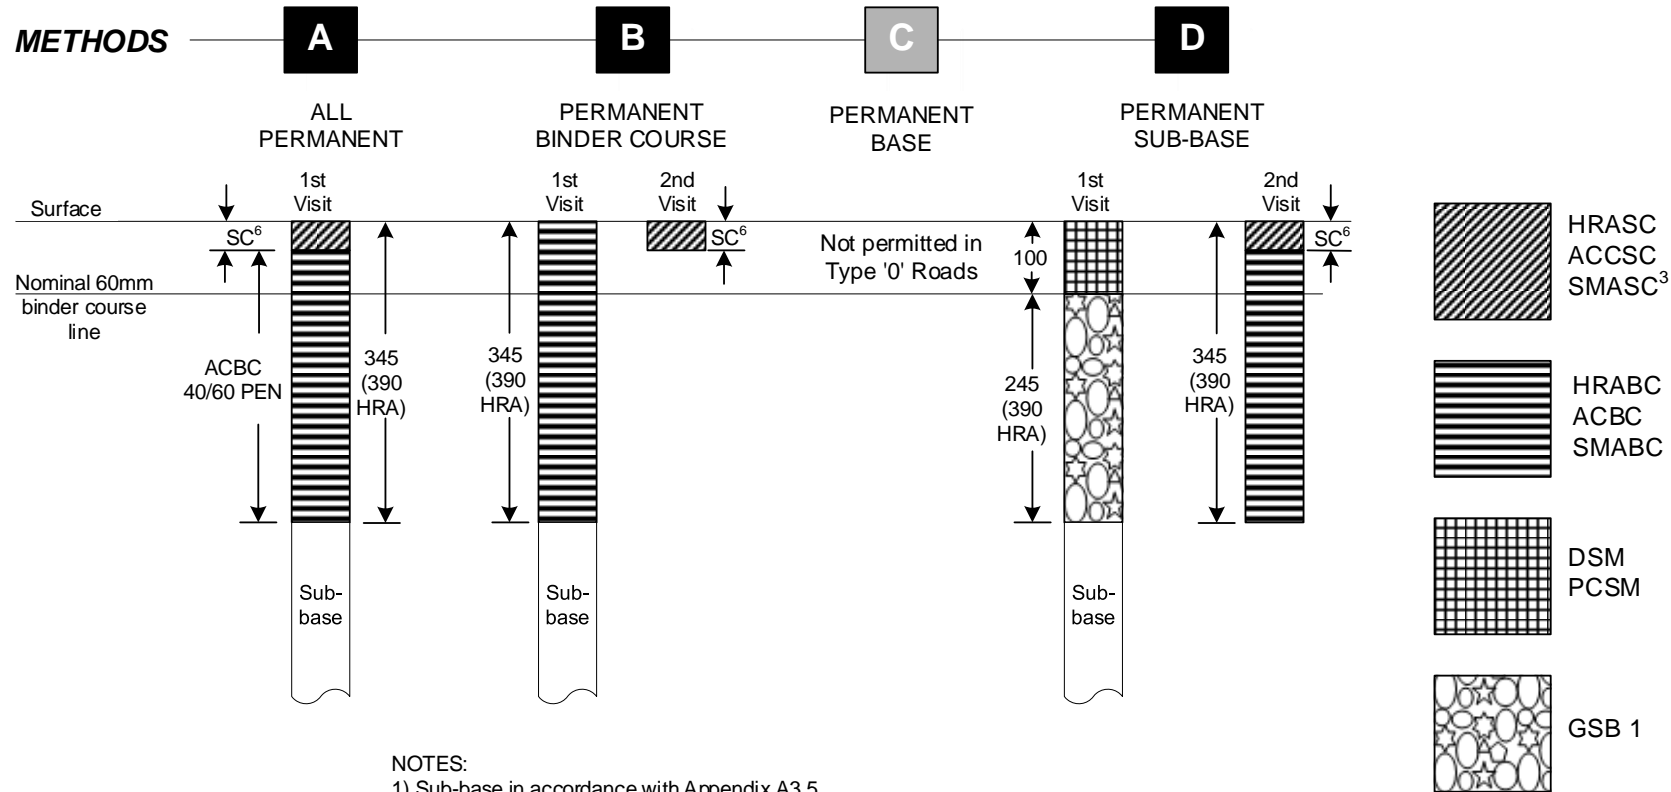


NOTES:

- 1) Sub-base in accordance with Appendix A3.5.
- 2) For alternative reinstatement materials refer to Appendix A9 and Table A9.1.
- 3) Where HRABC is used, the thickness is increased for all reinstatement methods to those indicated in the brackets, e.g. 390 mm for combined Base/Binder Course for Method A.
- 4) PLEASE NOTE: Permitted Base/Binder Material depths may vary accordingly with certain PEN Grades. Please use this diagram in conjunction with Table A11.1 for minimum layer depth value for that material.
- 5) The compacted thickness for all individual 'Lifts' of bituminous mixtures including the binder course and shall be in accordance with Table A2.1.
- 6) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A3.0
Flexible Roads Type - '0'

Figure A3.0

Not to Scale

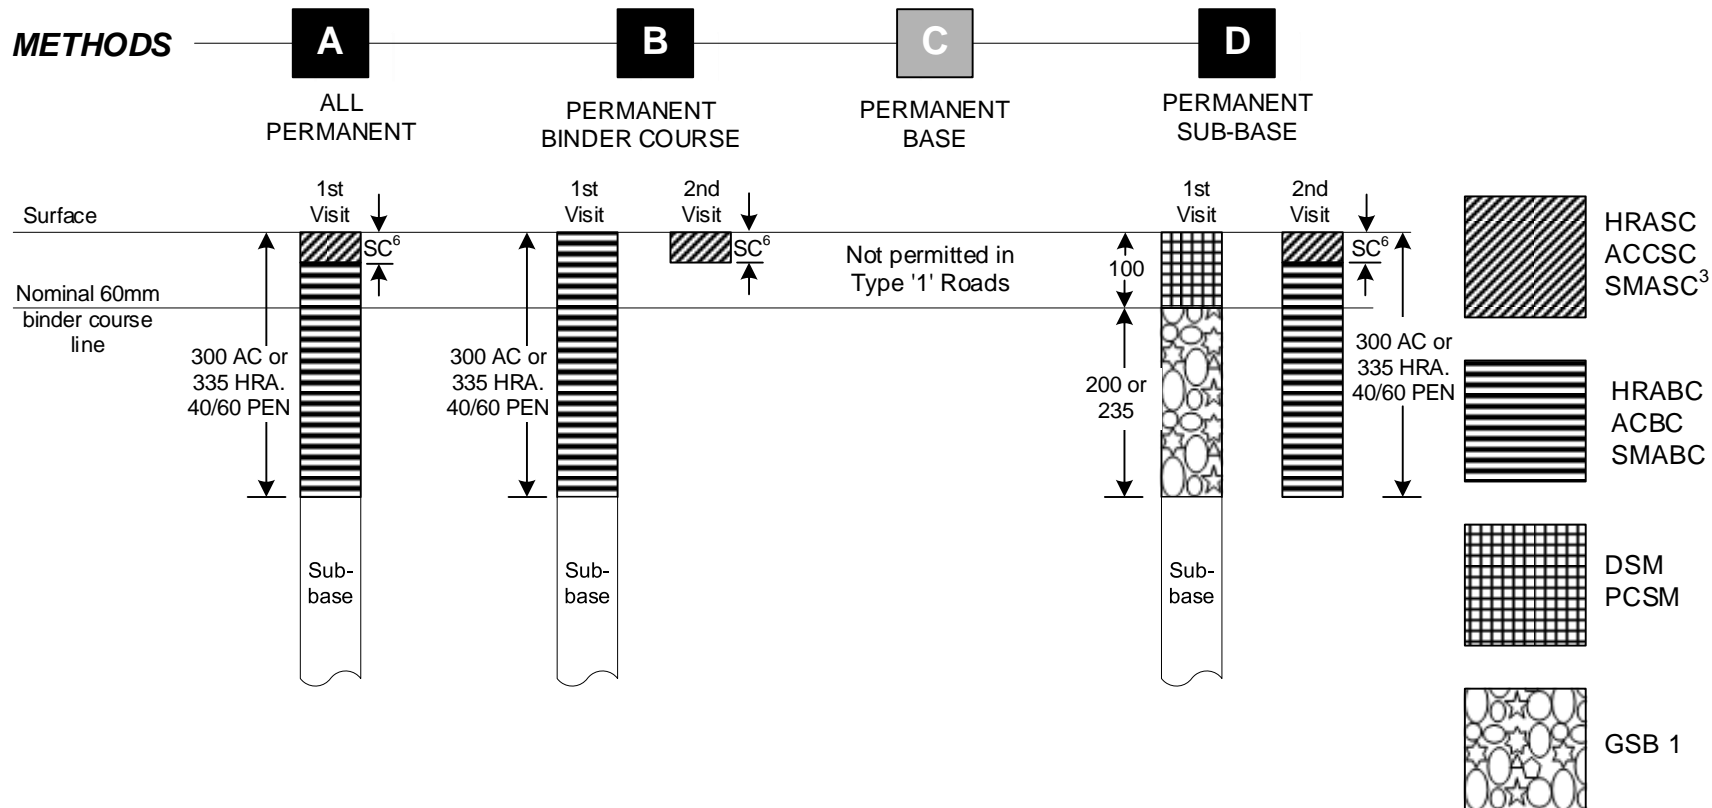

NOTES:


- 1) Sub-base in accordance with Appendix A3.5.
- 2) For alternative reinstatement materials refer to Appendix A9 and Table A9.1.
- 3) Where HRABC is used, the thickness is increased for all reinstatement methods to those indicated in the brackets, e.g. 335 mm for combined Base/Binder Course for Method A.
- 4) PLEASE NOTE: Permitted Base/Binder Material depths may vary accordingly with certain PEN Grades. Please use this diagram in conjunction with Table A11.1 for minimum layer depth value for that material.
- 5) The compacted thickness for all individual 'Lifts' of bituminous mixtures including the binder course and shall be in accordance with Table A2.1.
- 6) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A3.1

Flexible Roads Type - '1'

Figure A3.1

Not to Scale

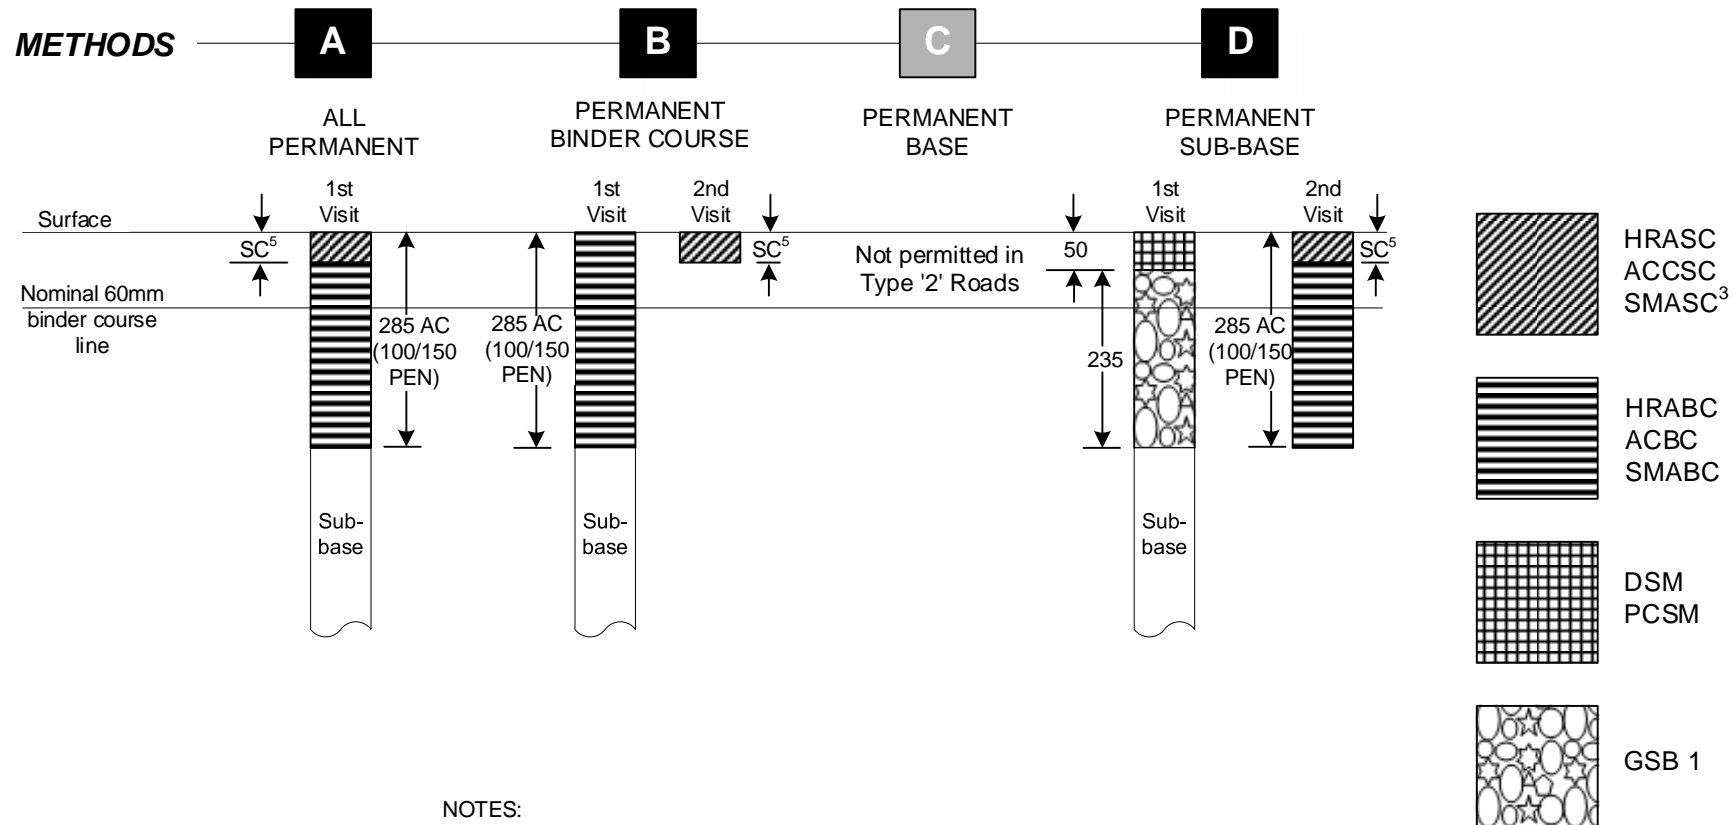

NOTES:


- 1) Sub-base in accordance with Appendix A3.5.
- 2) For alternative reinstatement materials refer to Appendix A9 and Table A9.1.
- 3) PLEASE NOTE: Permitted Base/Binder Material depths may vary accordingly with certain PEN Grades. Please use this diagram in conjunction with Table A11.1 for minimum layer depth value for that material.
- 4) The compacted thickness for all individual 'Lifts' of bituminous mixtures including the binder course and shall be in accordance with Table A2.1.
- 5) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A3.2

Flexible Roads Type - '2'

Figure A3.2

Not to Scale

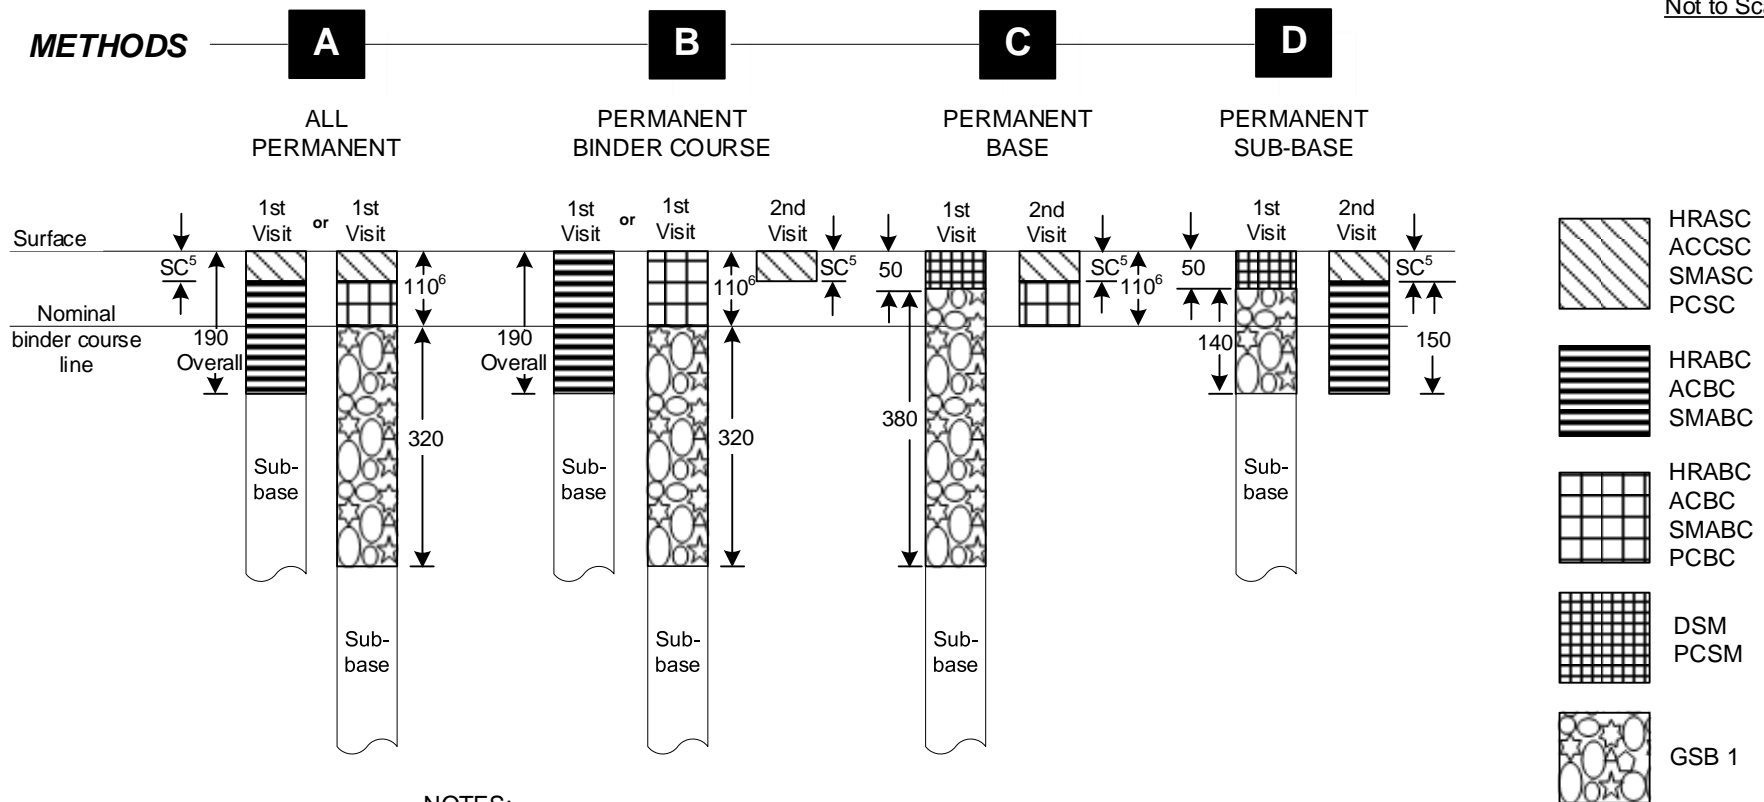

NOTES:


- 1) Sub-base in accordance with Appendix A3.5.
- 2) For alternative reinstatement materials refer to Appendix A9 and Table A9.1.
- 3) PLEASE NOTE: Permitted Base/Binder Material depths may vary accordingly with certain PEN Grades. Please use this diagram in conjunction with Table A11.1 for minimum layer depth value for that material.
- 4) The compacted thickness for all individual 'Lifts' of bituminous mixtures including the binder course and shall be in accordance with Table A2.1.
- 5) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.
- 6) Surfacing Layers should be laid at 110 mm with a tolerance of -10 mm.

Appendix A3.3

Flexible Roads Type - '3'

Figure A3.3

Not to Scale

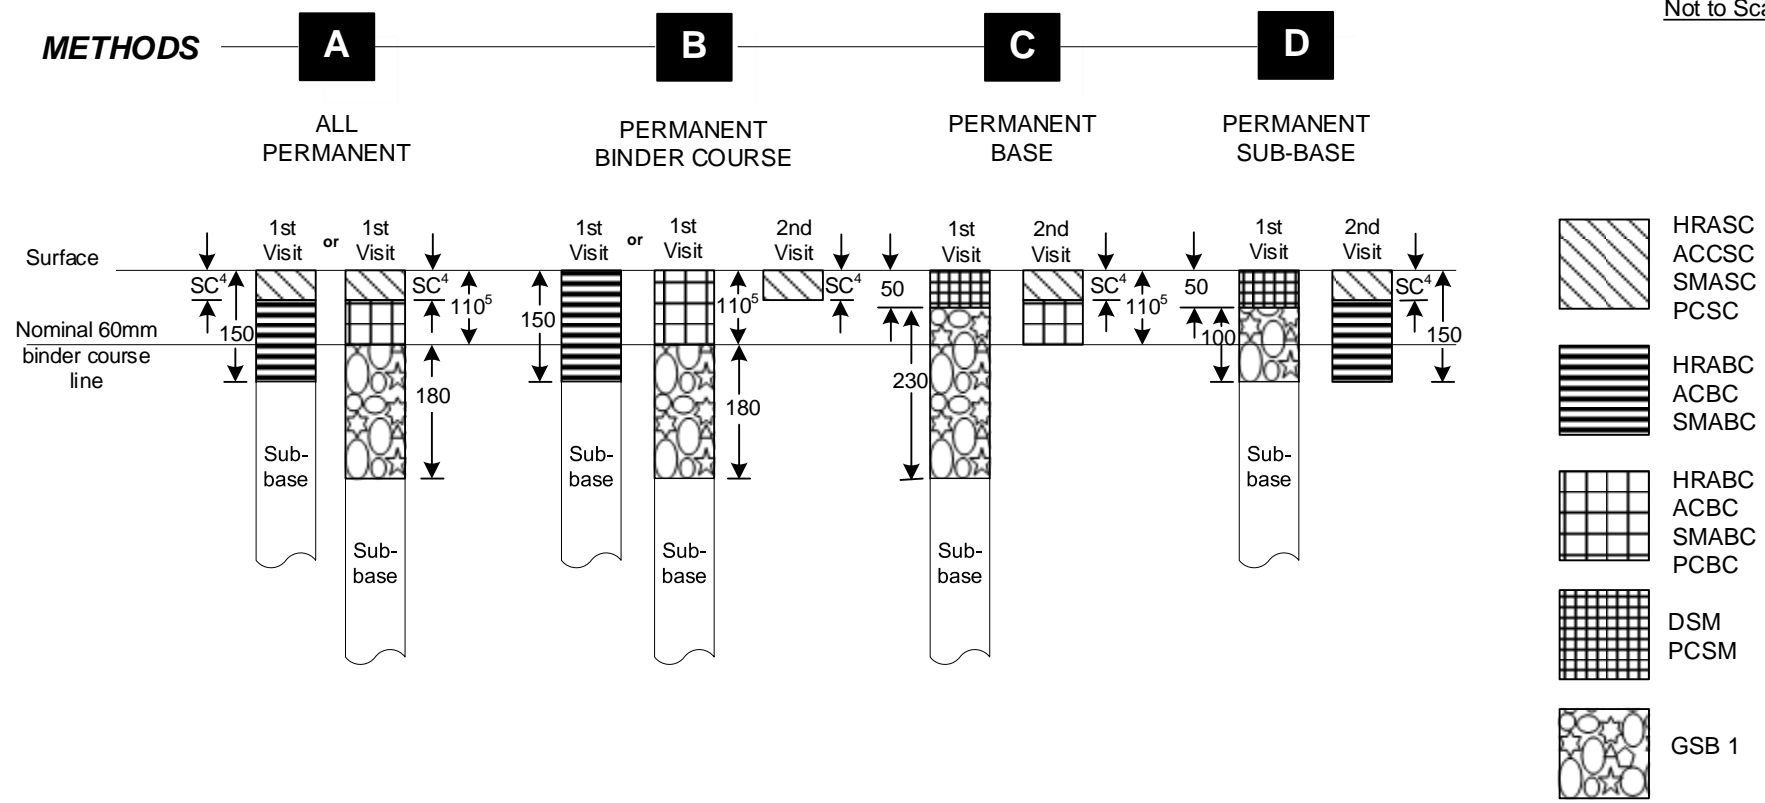

NOTES:


- 1) Sub-base in accordance with Appendix A3.5.
- 2) For alternative reinstatement materials refer to Appendix A9 and Table A9.1.
- 3) PLEASE NOTE: Permitted Base/Binder Material depths may vary accordingly with certain PEN Grades. Please use this diagram in conjunction with Table A11.1 for minimum layer depth value for that material.
- 4) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.
- 5) Surfacing Layers should be laid at 110 mm with a tolerance of -10 mm.

Appendix A3.4

Flexible Roads Type - '4'

Figure A3.4

Not to Scale

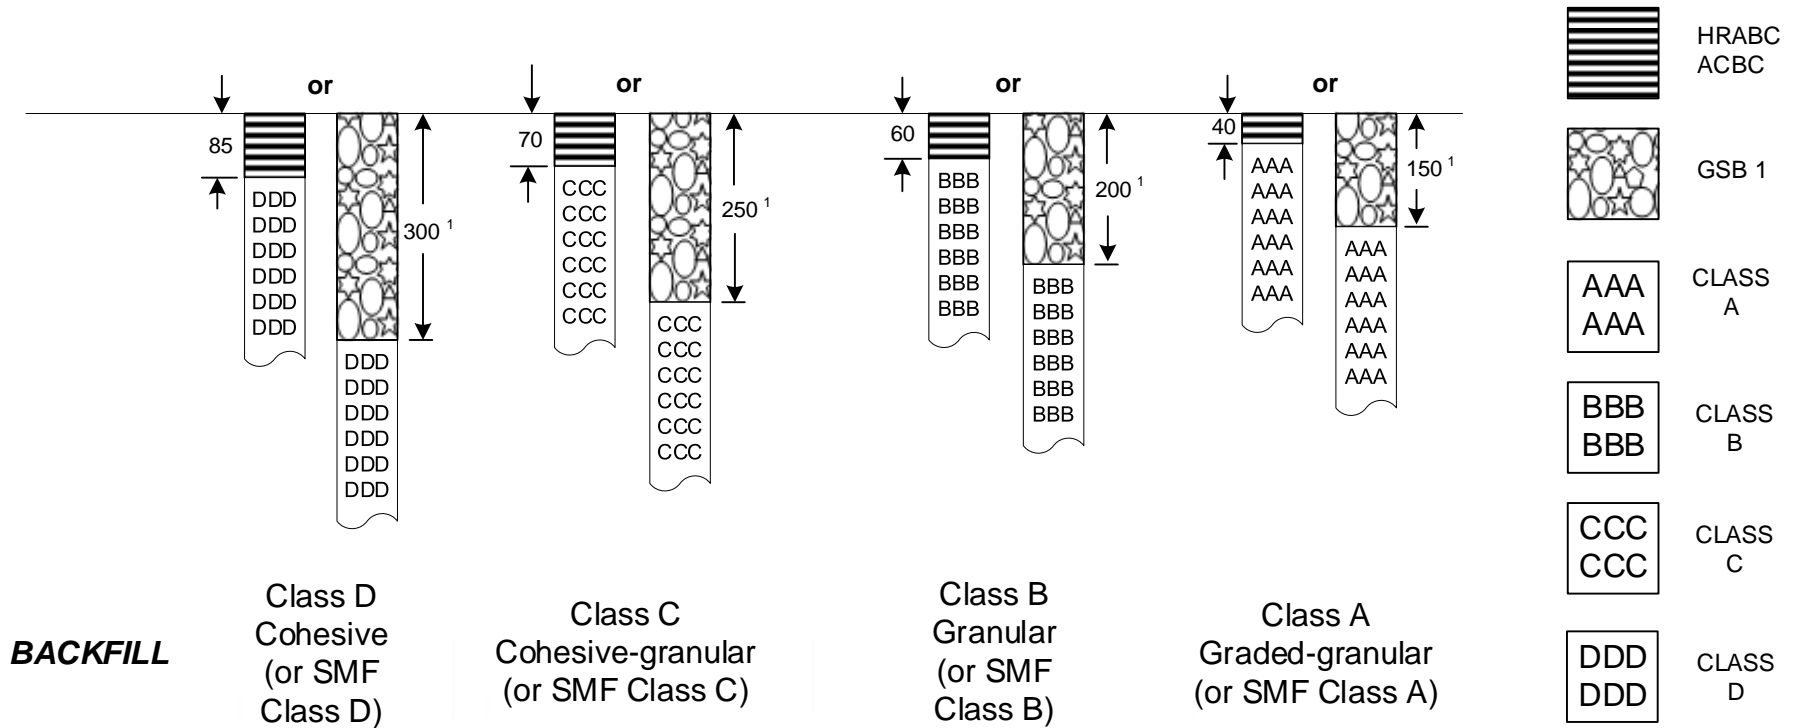

BACKFILL

Class D
Cohesive
(or SMF
Class D)

Class C
Cohesive-granular
(or SMF Class C)

Class B
Granular
(or SMF
Class B)

Class A
Graded-granular
(or SMF Class A)

NOTES:

- 1) Class A Graded-granular material is permitted alternative.
- 2) In addition to SMF classes A to D, for other alternative reinstatement materials refer to Appendix A9.

Appendix A3.5


Sub-base Construction - Flexible Roads

Figure A3.5

Appendix A4 Reinstatement – Composite Roads

The following figures show the reinstatement requirement for composite roads;

Not to Scale

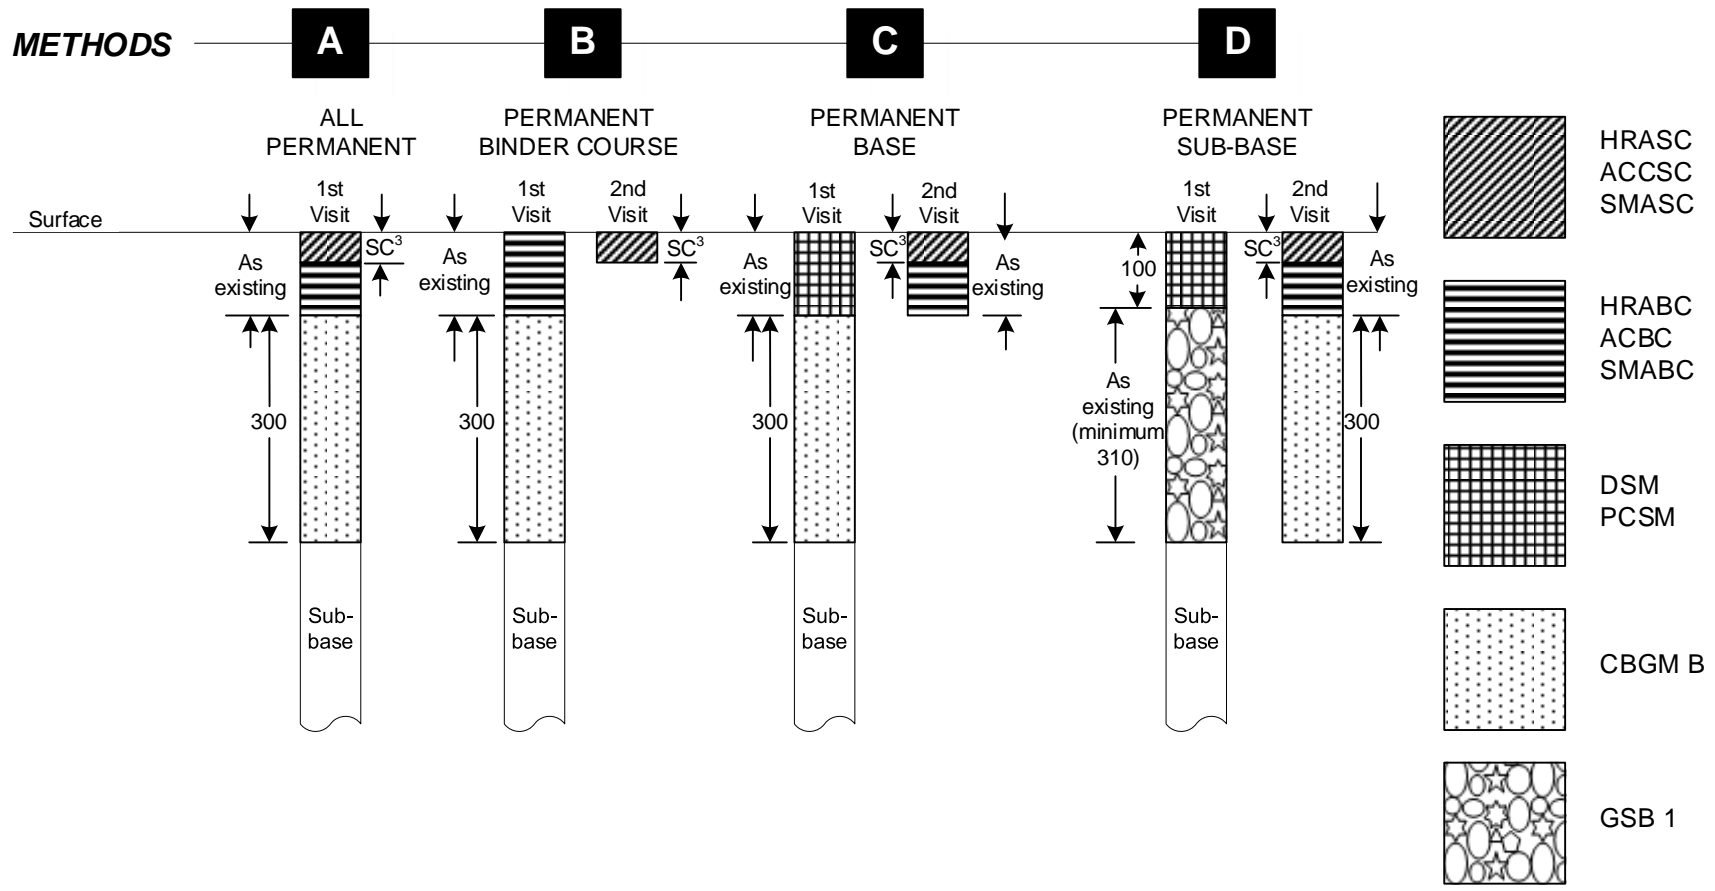

NOTES:


- 1) Sub-base in accordance with Appendix A4.4.
- 2) For alternative reinstatement materials refer to Appendix A9.
- 3) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A4.0

Composite Roads Type - '0'

Figure A4.0

Not to Scale

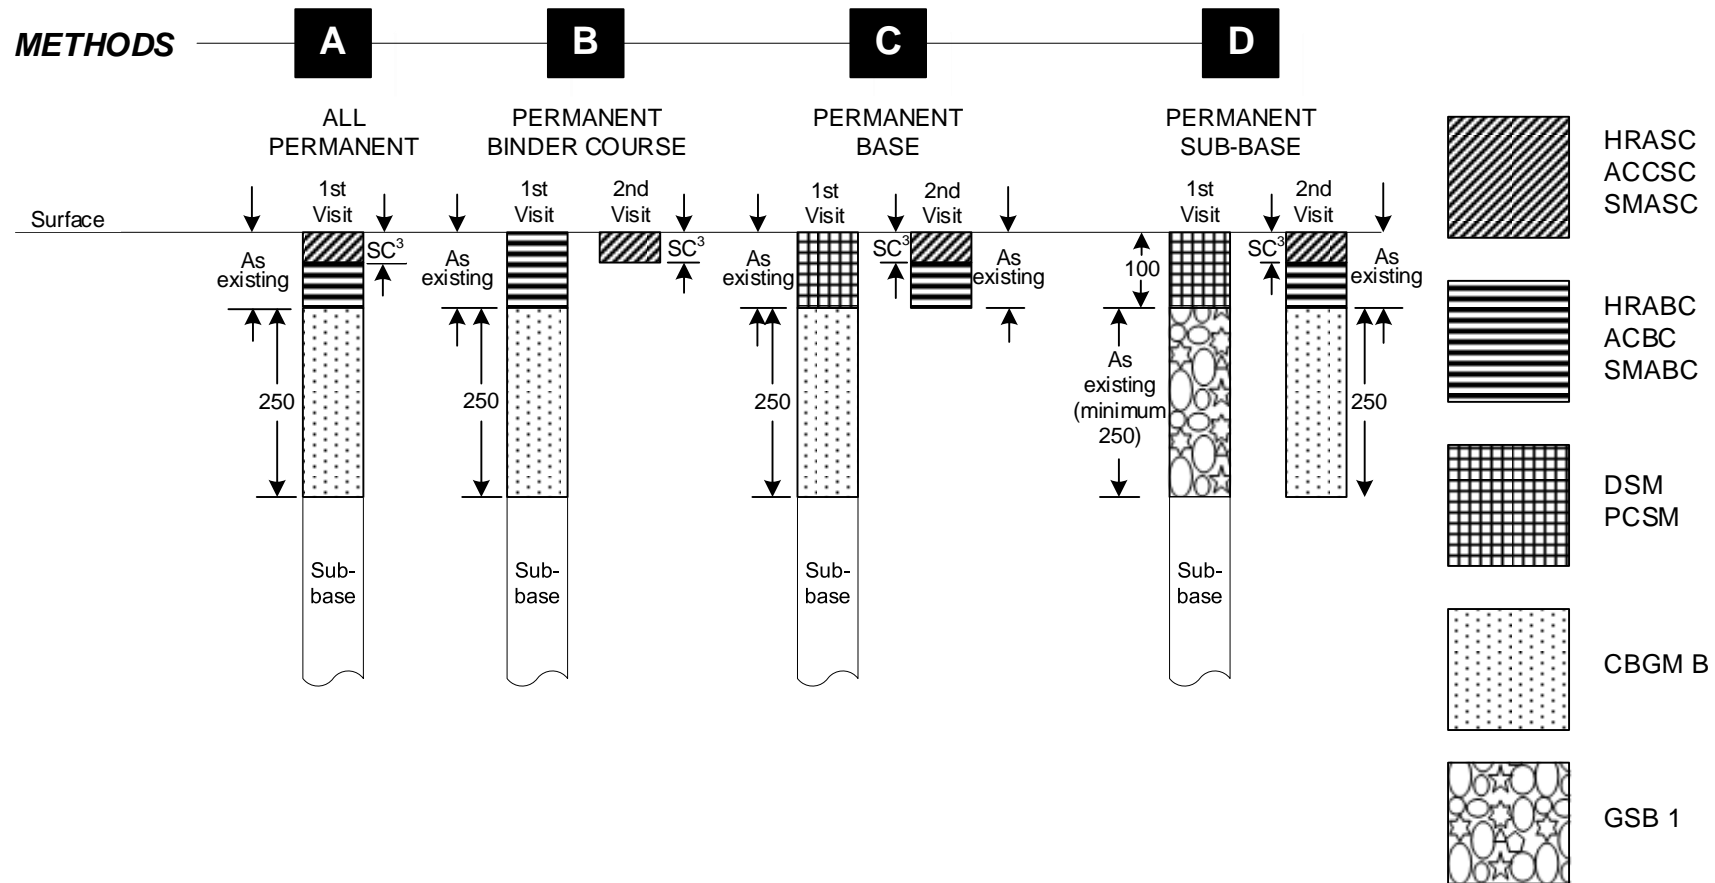

NOTES:


- 1) Sub-base in accordance with Appendix A4.4.
- 2) For alternative reinstatement materials refer to Appendix A9.
- 3) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A4.1

Composite Roads Type - '1'

Figure A4.1

Not to Scale

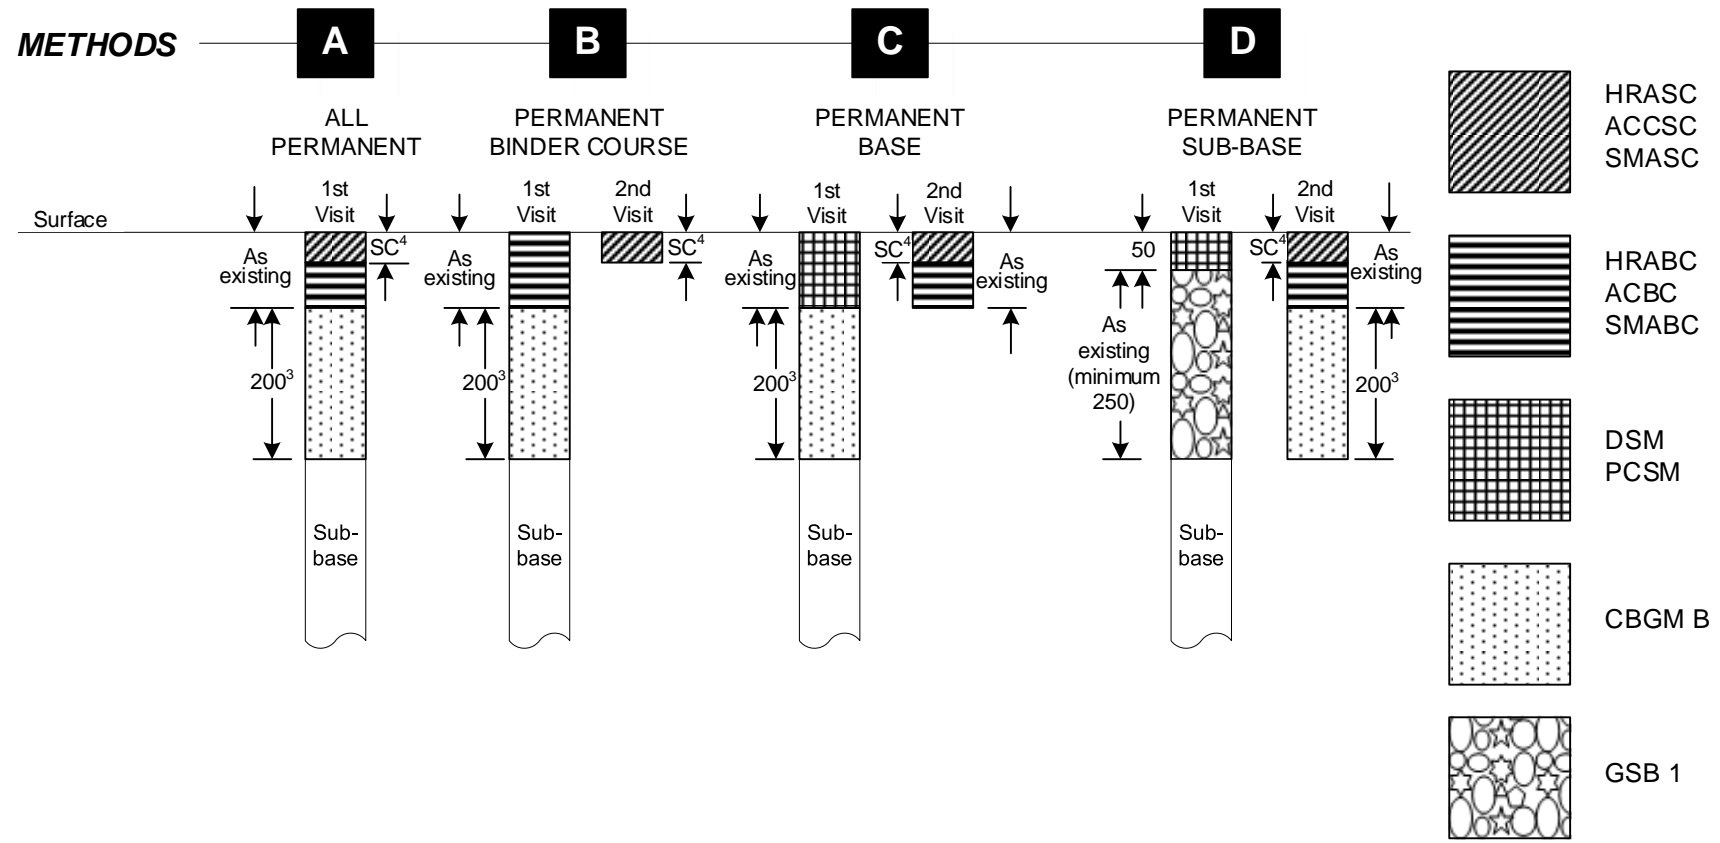

NOTES:


- 1) Sub-base in accordance with Appendix A4.4.
- 2) For alternative reinstatement materials refer to Appendix A9.
- 3) Roadbase to be 250mm thick if existing exceeds 200mm.
- 4) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A4.2

Composite Roads Type - '2'

Figure A4.2

Not to Scale

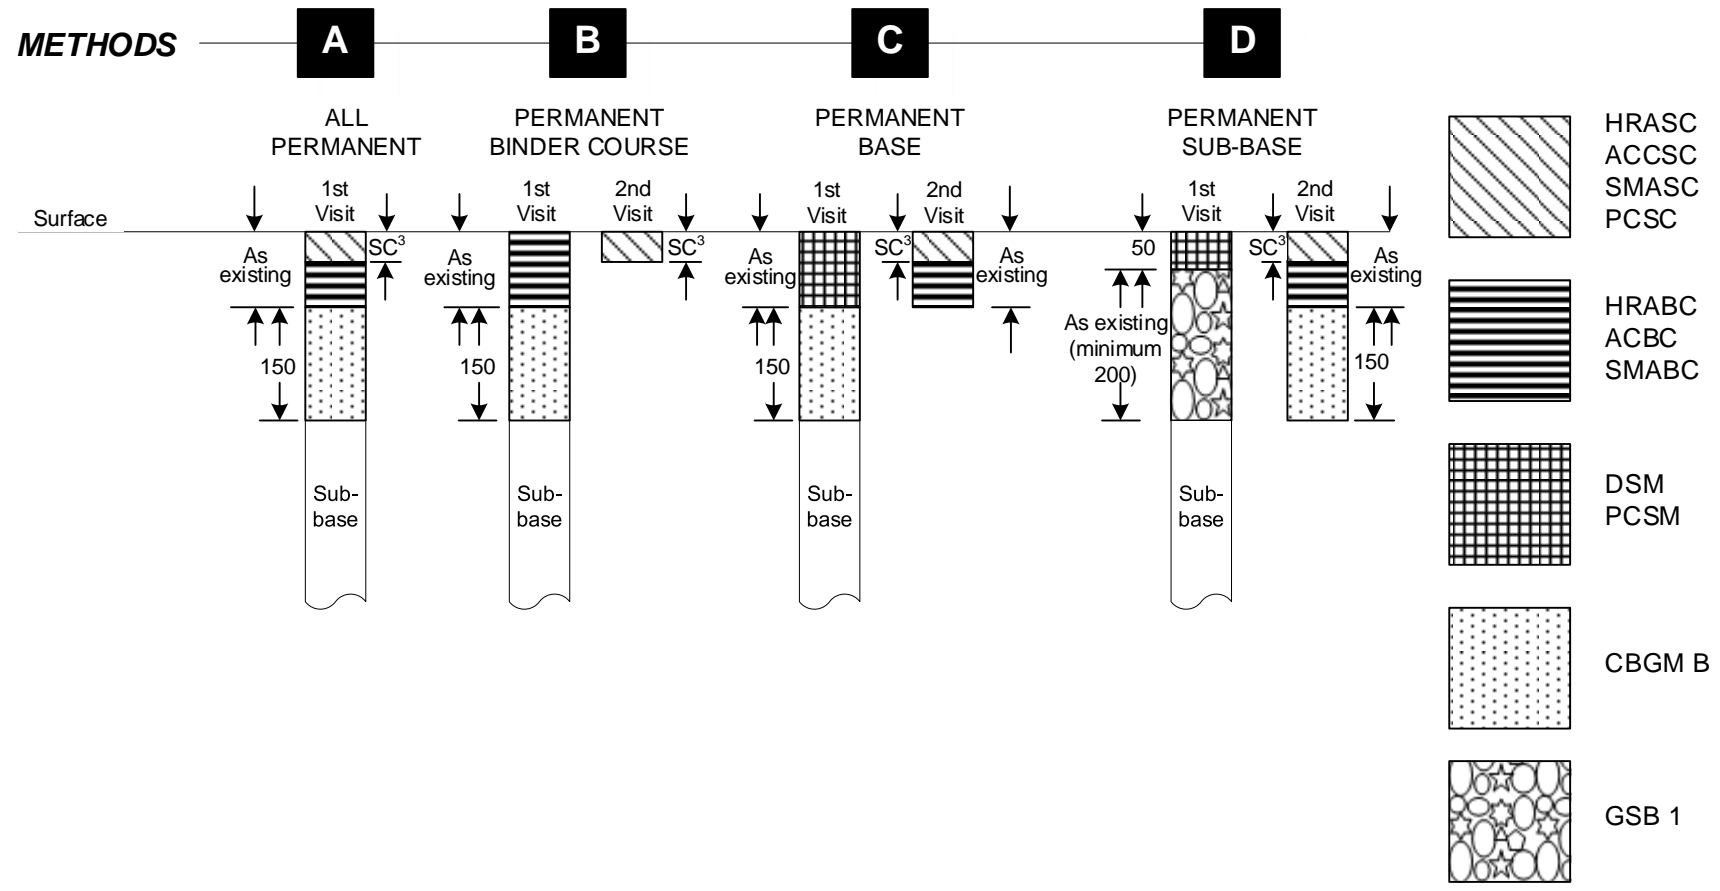


Appendix A4.3

Composite Roads Type - '3'&'4'

- NOTES:
- 1) Sub-base in accordance with Appendix A4.5.
 - 2) For alternative reinstatement materials refer to Appendix A9.
 - 3) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Figure A4.3
184

Not to Scale

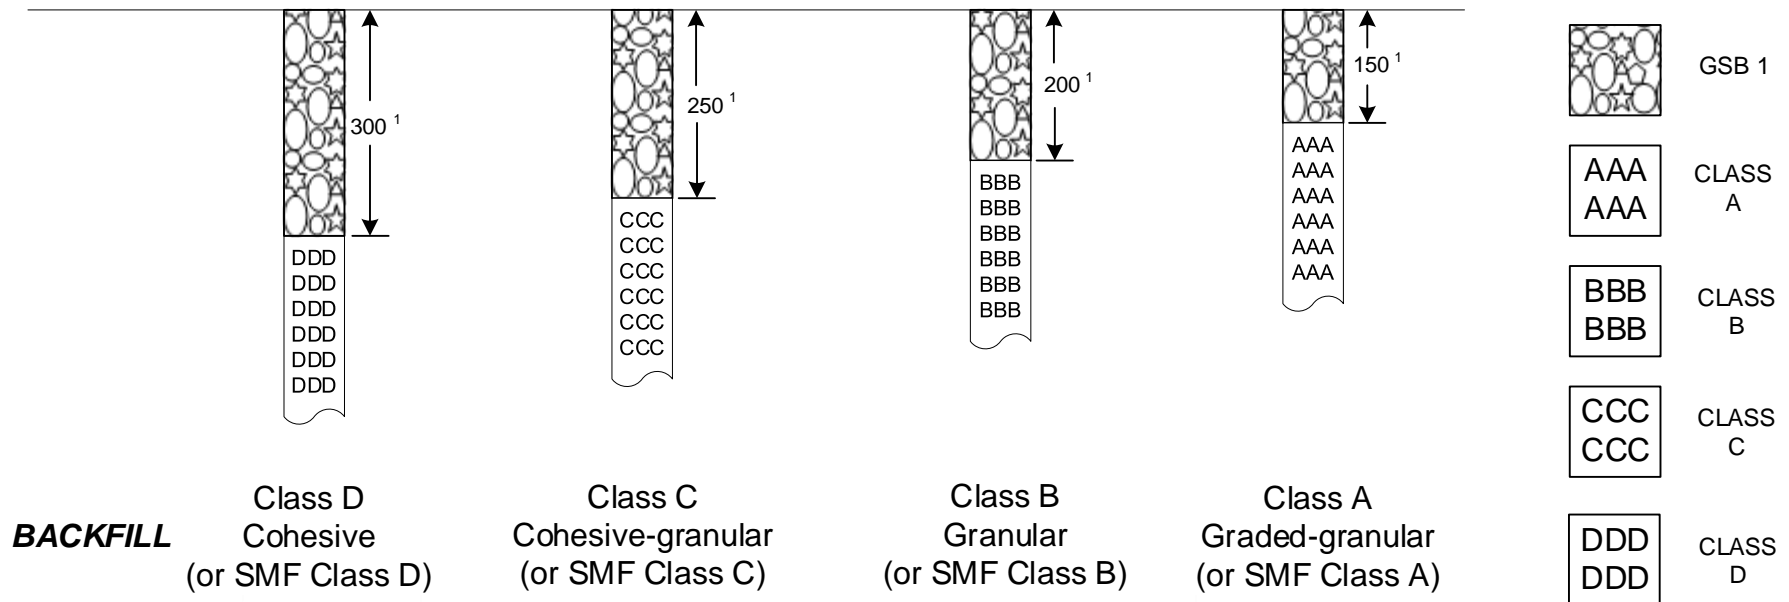


NOTES:

- 1) Class A Graded-granular material is permitted alternative
- 2) In addition to SMF classes A to D, for other alternative reinstatement materials refer to Appendix A9.

Appendix A4.4

Sub-base Construction - Composite Roads - Types '0', '1' & '2'

Figure A4.4

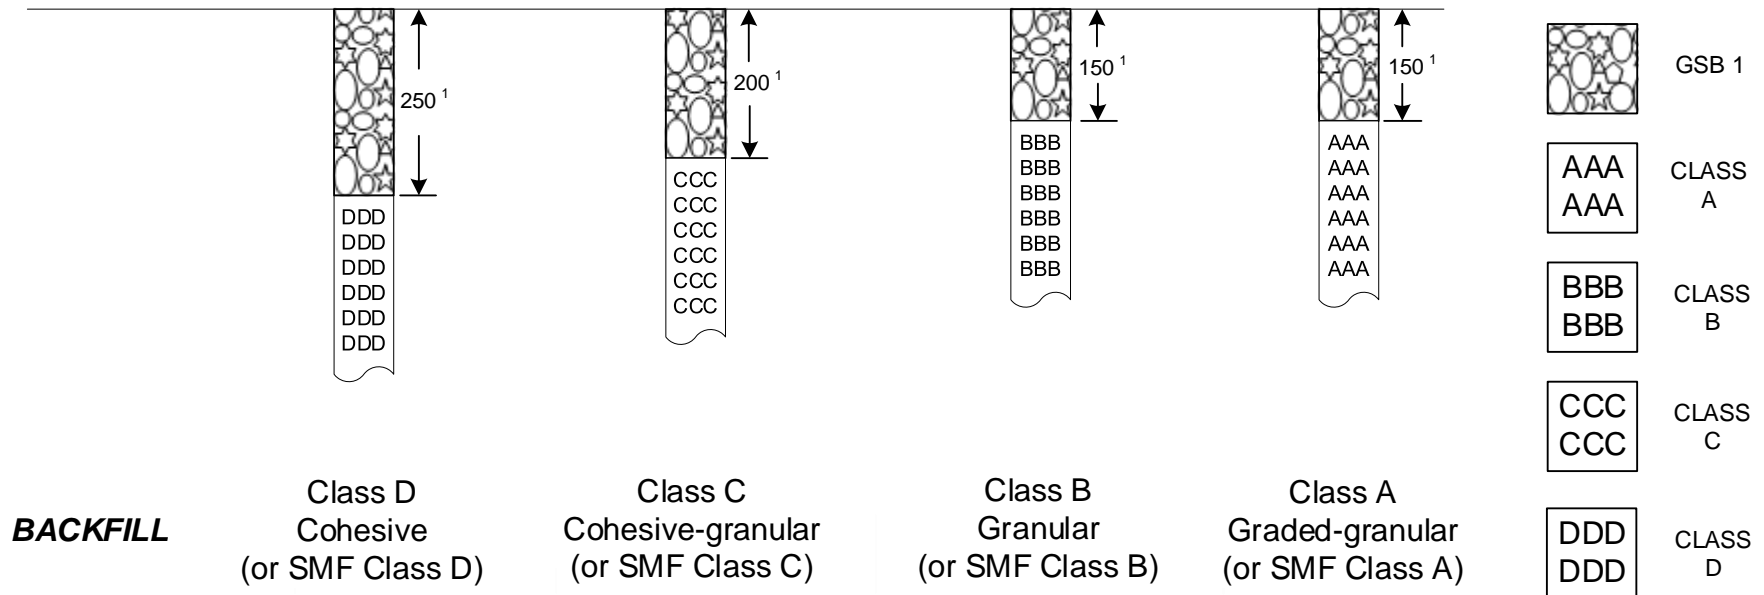

NOTES:

- 1) Class A Graded-granular material is permitted alternative.
- 2) In addition to SMF classes A to D, for other alternative reinstatement materials refer to Appendix A9.

Appendix A4.5


Sub-base Construction - Composite Roads - Types '3' & '4'

Figure A4.5

Appendix A5 Reinstatement – Rigid Roads

The following figures show the reinstatement requirement for rigid roads;

Not to Scale

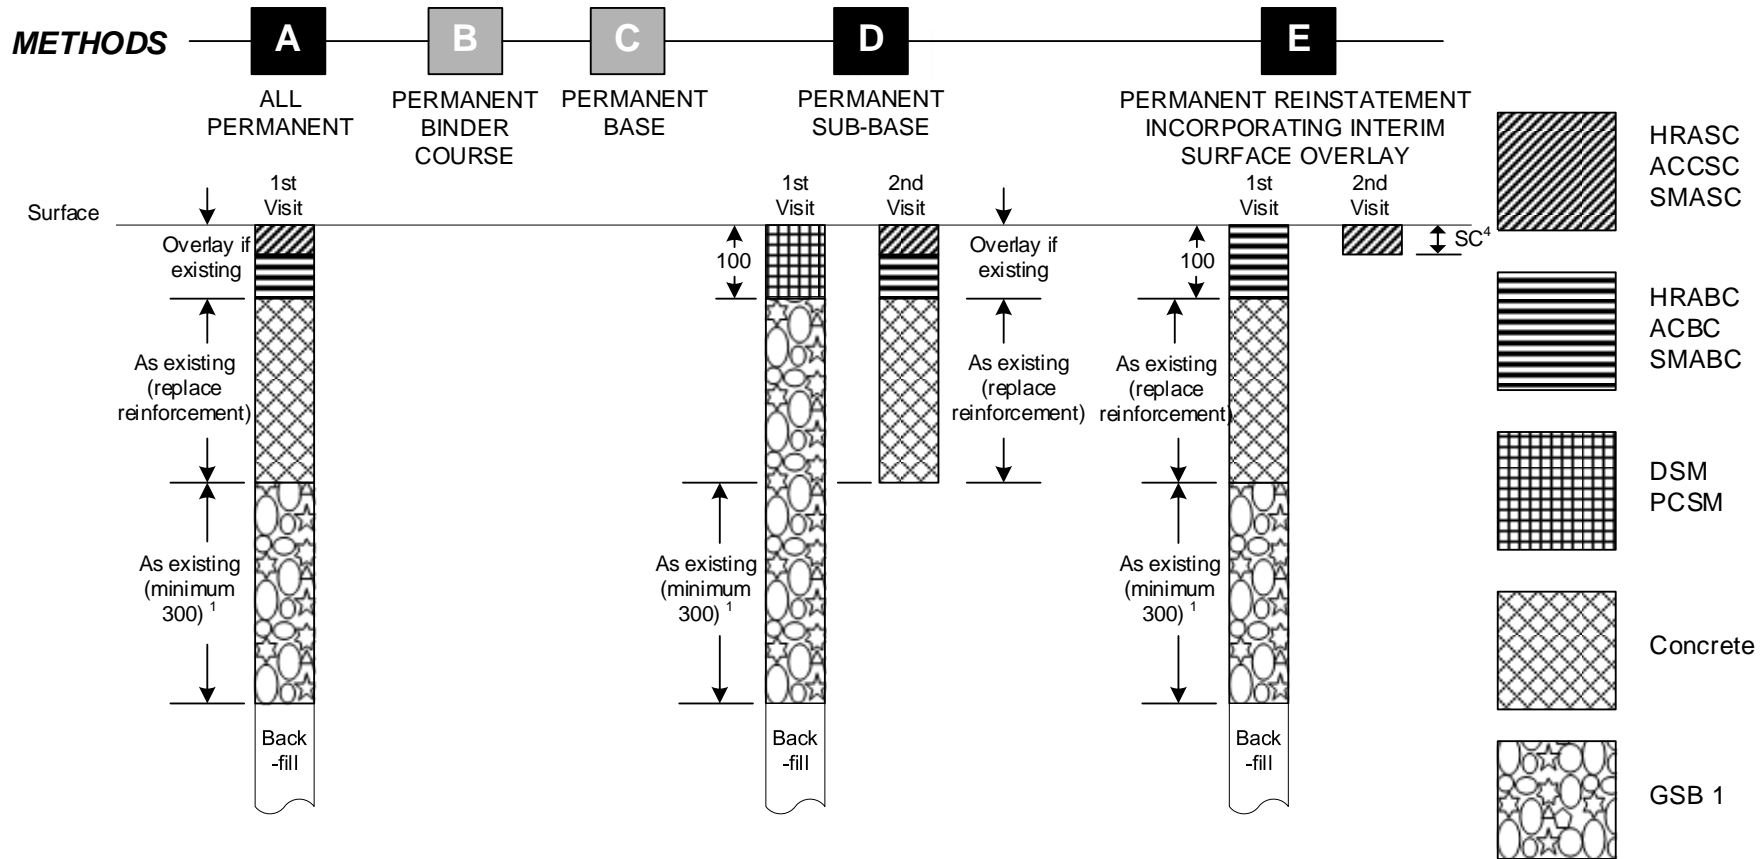

NOTES:


- 1) CBGM B if existing.
- 2) For alternative reinstatement materials refer to Appendix A9.
- 3) Method E – Permanent Reinstatement incorporating interim surface overlay is only a reinstatement method option for rigid roads.
- 4) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A5.0

Rigid Roads Type - '0'

Figure A5.0

Not to Scale

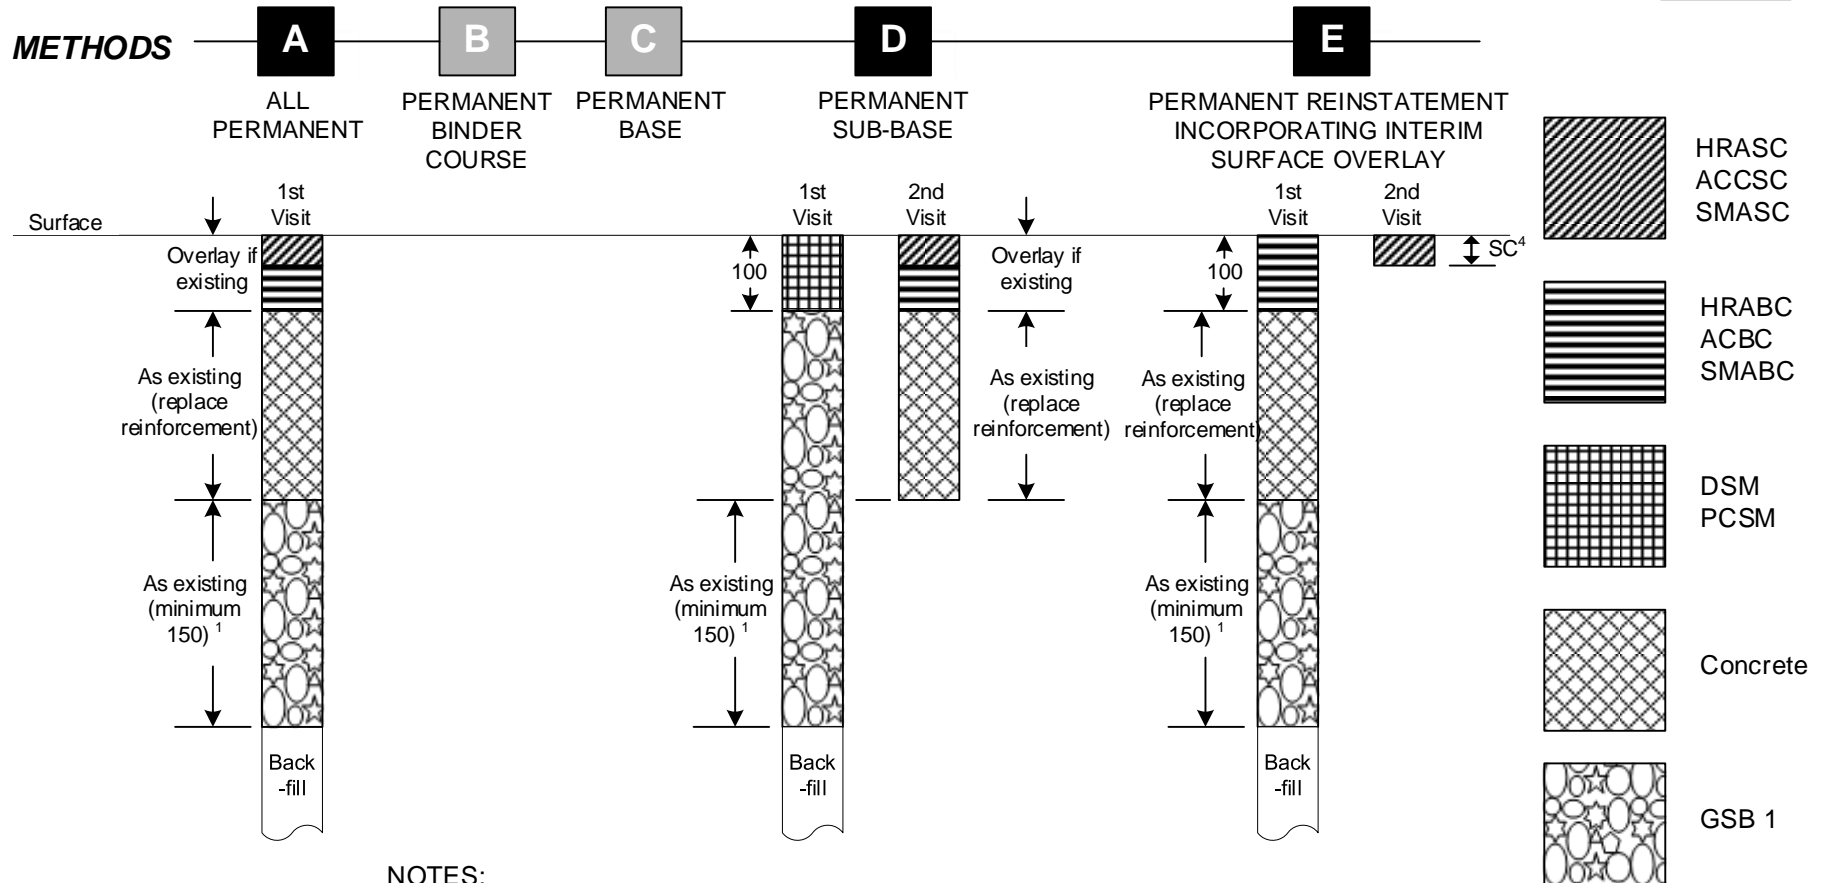

NOTES:


- 1) CBGM B if existing.
- 2) For alternative reinstatement materials refer to Appendix A9.
- 3) Method E – Permanent Reinstatement incorporating interim surface overlay is only a reinstatement method option for rigid roads.
- 4) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A5.1

Rigid Roads Type - '1'

Figure A5.1

Not to Scale

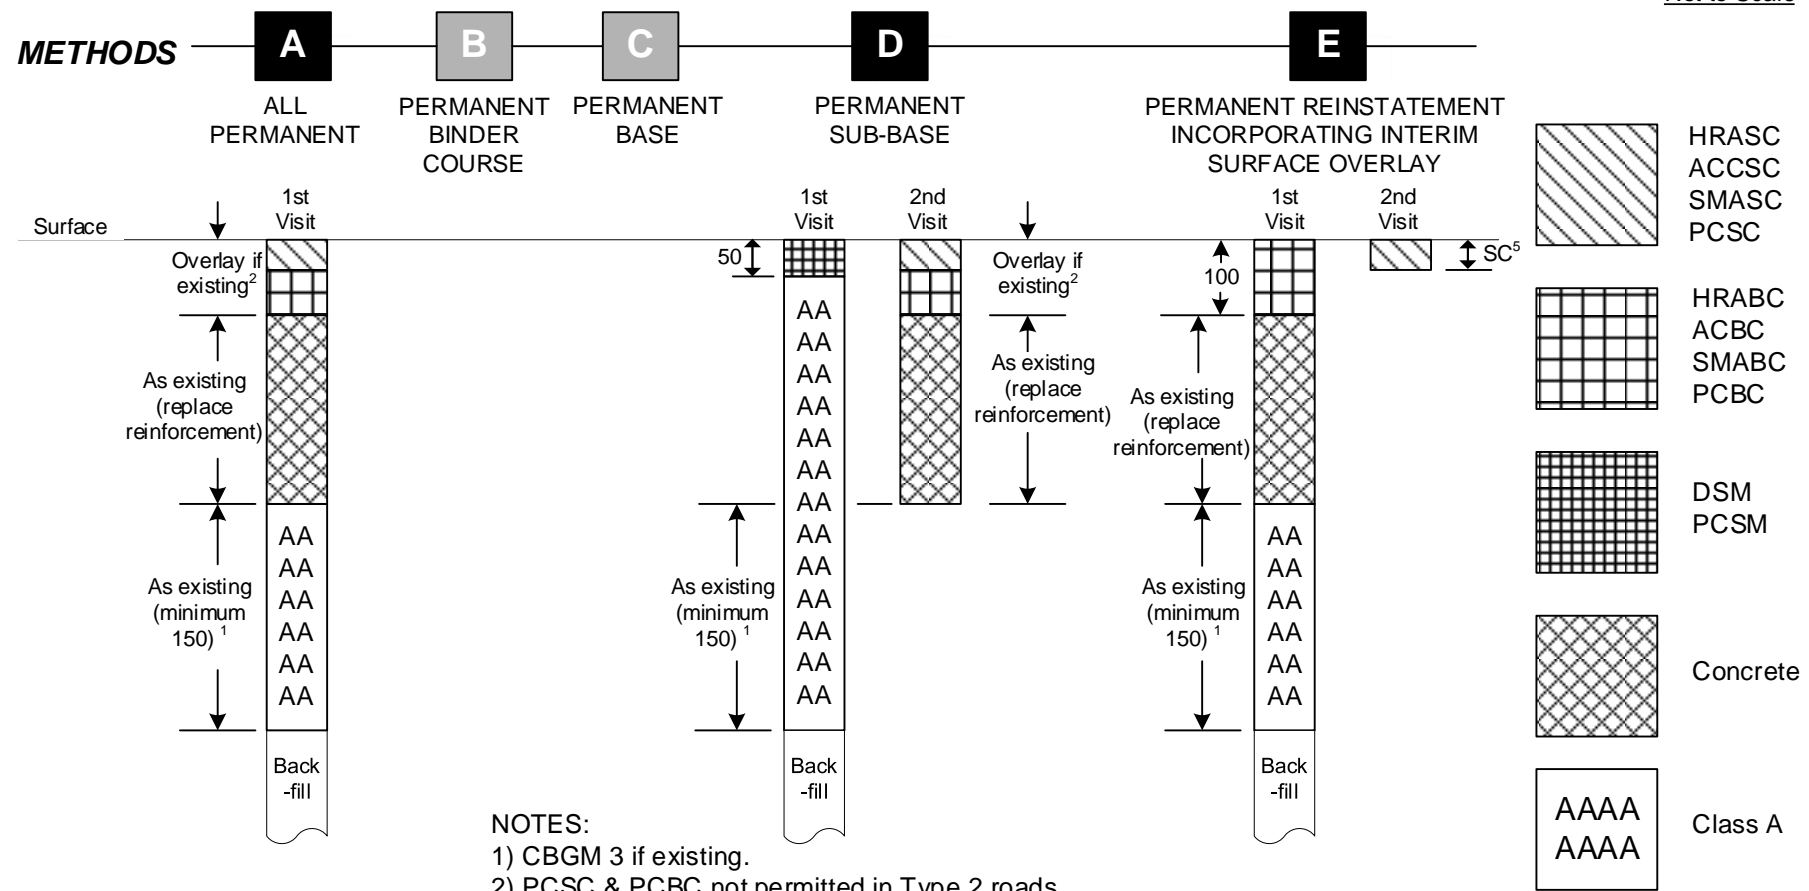

NOTES:

- 1) CBGM 3 if existing.
- 2) PCSC & PCBC not permitted in Type 2 roads.
- 3) For alternative reinstatement materials refer to Appendix A9.
- 4) Method E – Permanent Reinstatement incorporating interim surface overlay is only a reinstatement method option for rigid roads.
- 5) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A5.2


Rigid Roads Type - '2', '3' & '4'

Figure A5.2

Appendix A6 Reinstatement – Modular Roads

The following figures show the reinstatement requirement for modular roads;

Not to Scale

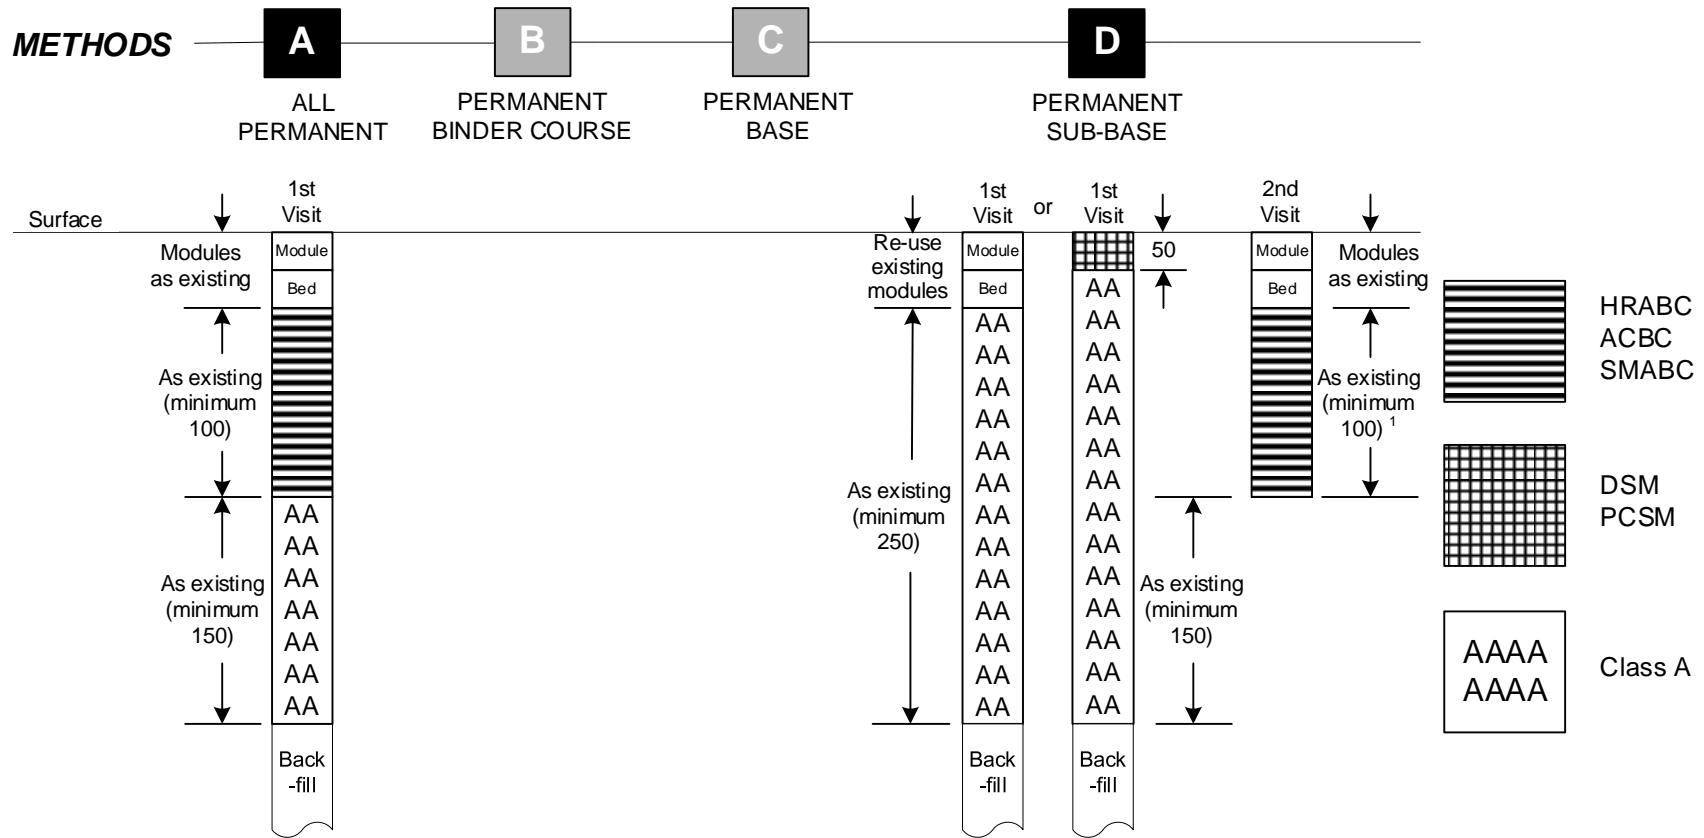

NOTES:


- 1) May be permanently reinstated on the first visit.
- 2) For alternative reinstatement materials refer to Appendix A 9.

Appendix A6.1

Modular Roads (Bituminous Base) Types - '3' & '4'

Figure A6.1

Not to Scale

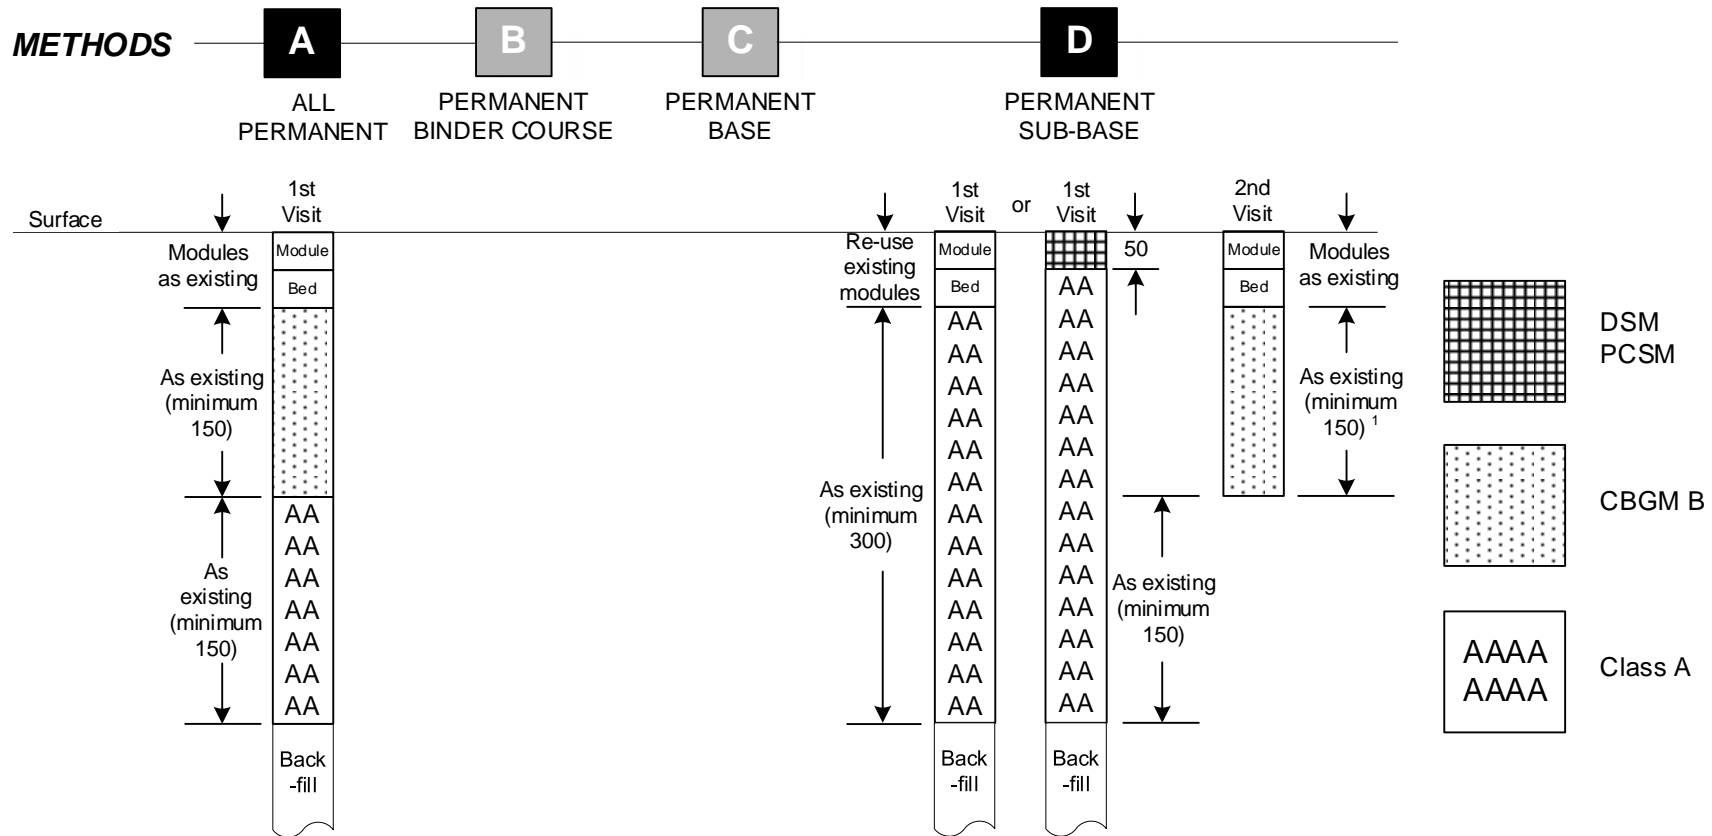

NOTES:


- 1) May be permanently reinstated on the first visit.
- 2) For alternative reinstatement materials refer to Appendix A9.

Appendix A6.2

Modular Roads (Composite Base) Types - '3' & '4'

Figure A6.2

Not to Scale

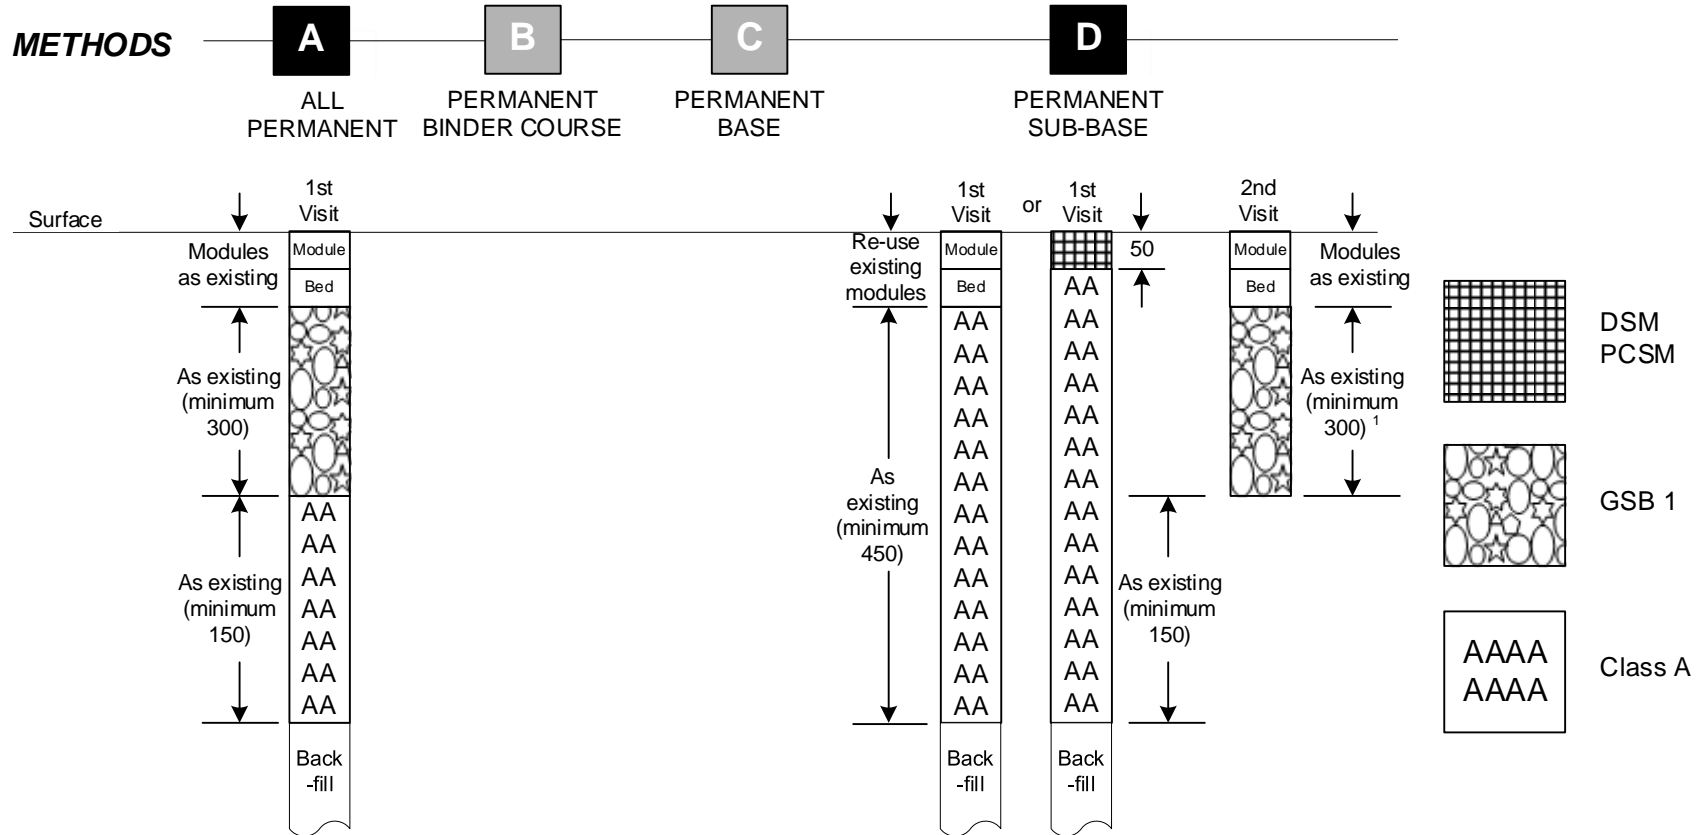

NOTES:

- 1) May be permanently reinstated on the first visit.
- 2) For alternative reinstatement materials refer to Appendix A 9.

Appendix A6.3


Modular Roads (Granular Base) Types - '3' & '4'

Figure A6.3

Appendix A7 Reinstatement – Footways, Footpaths and Cycle Tracks

The following figures show the reinstatement requirement for footways, footpaths and cycle tracks;

Not to Scale

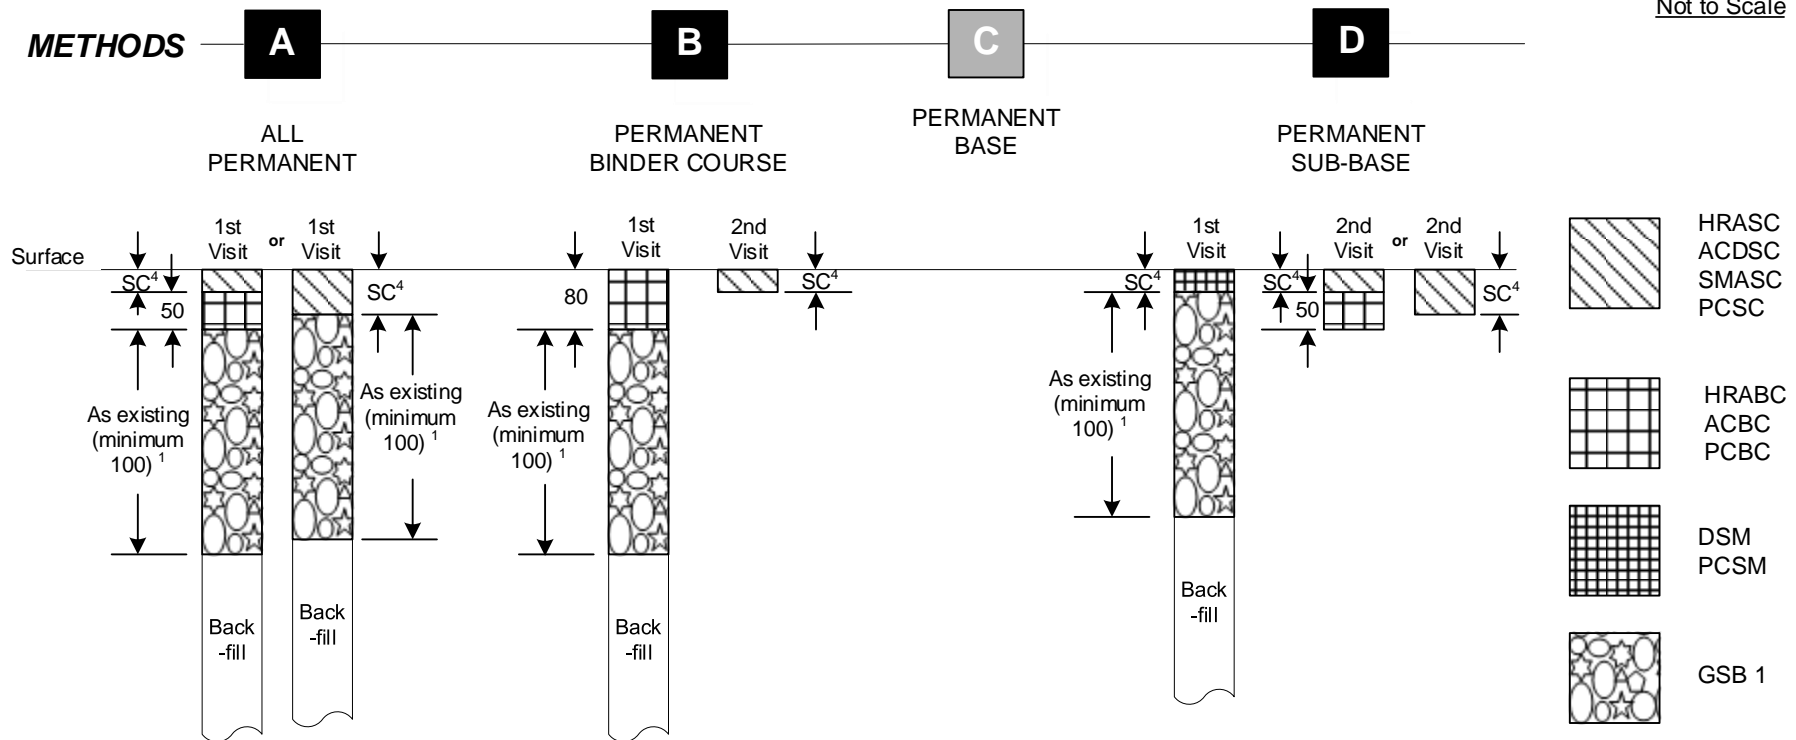

NOTES:


- 1) Class A Graded-granular is a permitted alternative.
- 2) For alternative reinstatement materials refer to Appendix A9.
- 3) For optional SC 30/14 increase layer to accommodate minimum lift thickness. i.e. SC Only = min 70 mm = 2 x 35 mm.
- 4) The compacted thickness for all Surface Courses (SC) shall be in accordance with Table A2.1.

Appendix A7.1

Flexible Footways, Footpaths and Cycle Tracks

Figure A7.1

Not to Scale

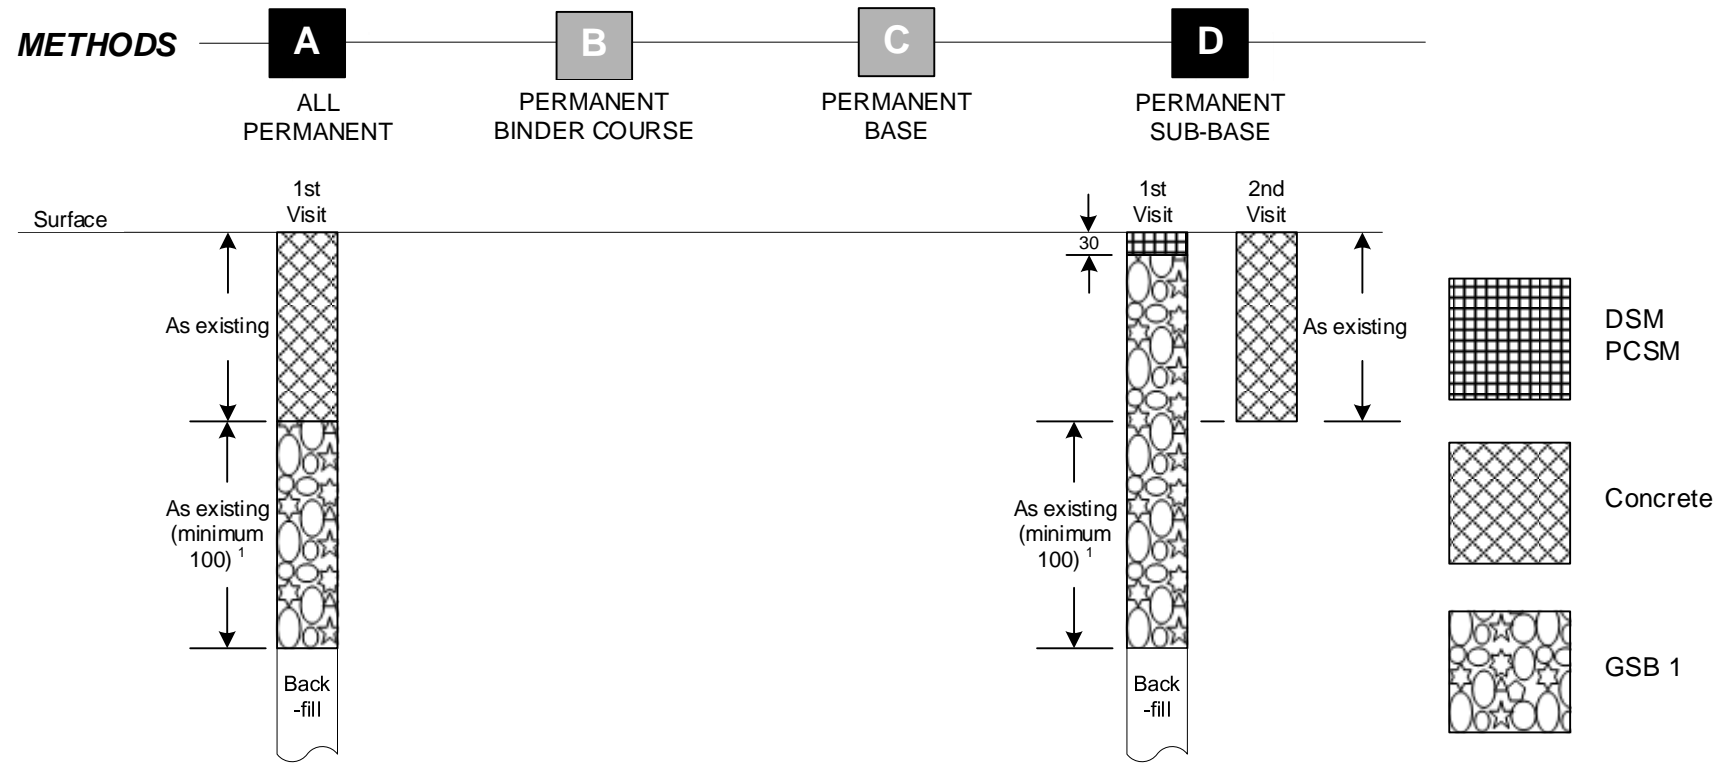

NOTES:


- 1) Class A Graded-granular is a permitted alternative.
- 2) For alternative reinstatement materials refer to Appendix A9.

Appendix A7.2

Rigid Footways, Footpaths and Cycle Tracks

Figure A7.2

Not to Scale

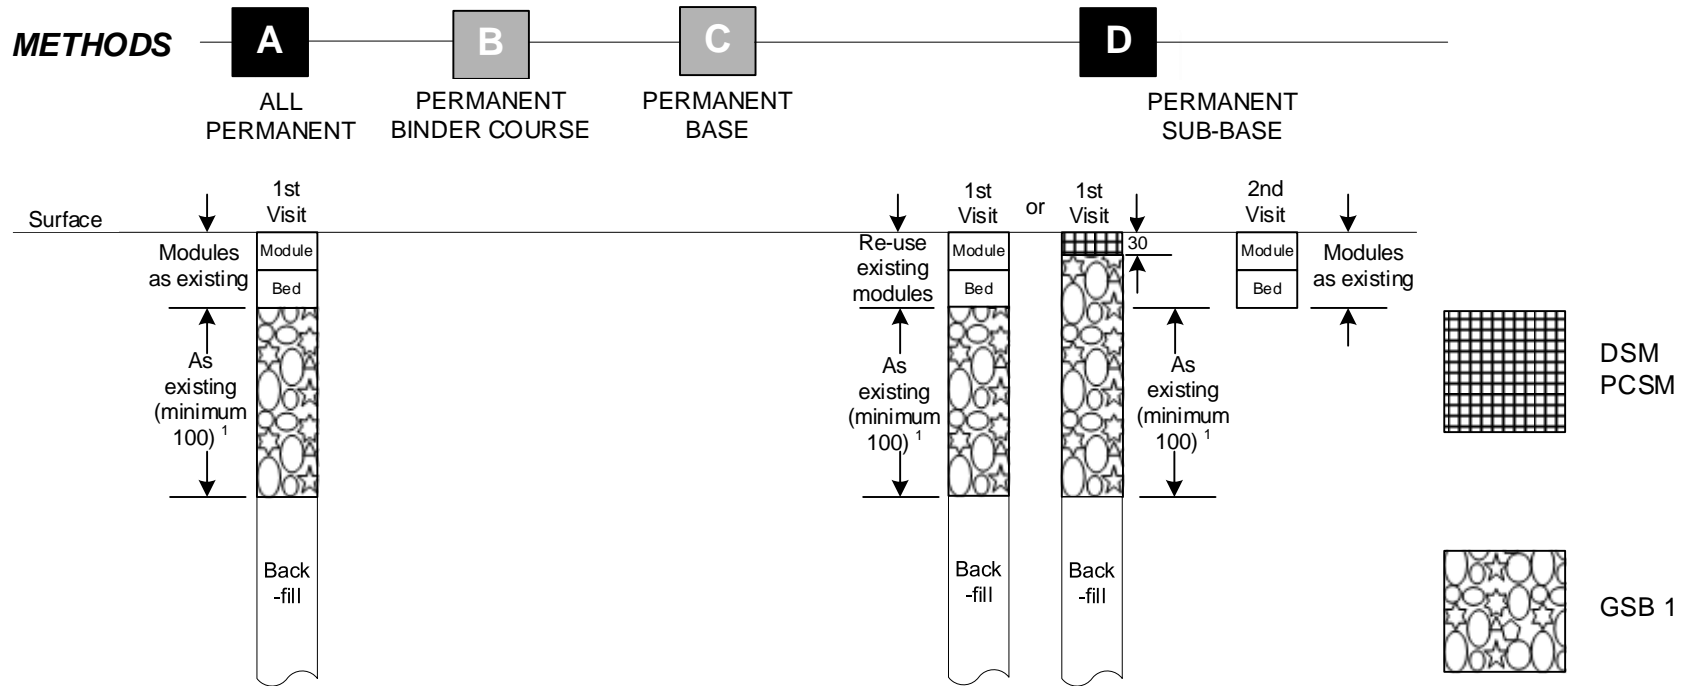

NOTES:

- 1) Class A Graded-granular is a permitted alternative.
- 2) For alternative reinstatement materials refer to Appendix A9.

Appendix A7.3

Modular Footways, Footpaths and Cycle Tracks

Figure A7.3

Appendix A8 Compaction Requirements

A8.1 Granular, Cohesive and Cement Bound Materials

A8.1.1 All graded granular, granular, cohesive/granular, cohesive and cement bound materials laid above the surround to apparatus shall be compacted in accordance with [Table A8.1](#).

A8.2 Chalk Materials

Not used in Scotland

A8.3 Bituminous Mixtures

A8.3.1 All bituminous mixtures for permanent reinstatements permitted in [Appendix A2](#) shall be compacted to the in-situ air void requirements of Section [S10.2.4](#). Guidance on compaction procedures that may be capable of achieving the specified air voids values is given in Appendix [NGA8.3](#)

A8.3.2 Compaction should be discontinued if the mixture shows any signs of distress, regardless of whether the minimum number of passes suggested in [NGA8.3](#) have been applied

A8.3.3 Compacted materials shall be capable of being wet flush cored as follows:

- a) hot materials – upon reaching ambient temperature;
- b) PCSMs – at 6 months from the date of the permanent reinstatement.

Table A8.1 Compaction Requirements for Granular, Cohesive and Cement Bound Materials

Compaction Plant and Weight Category	Cohesive Material (less than 20% granular content)			Granular Material (20% or more granular content including cement bound material)		
	Minimum Passes/Lift for compacted lift thickness up to			Minimum Passes/Lift for compacted lift thickness up to		
	100 mm	150 mm	200 mm	100 mm	150 mm	200 mm
Vibrotamper 50 kg minimum	4	8 #	NP	4	8	NP
Vibrating Roller Single Drum						
600-1000 kg/m	NP	NP	NP	12	NP	NP
1000-2000 kg/m	8	NP	NP	6	NP	NP
2000-3500 kg/m	3	6	NP	3	5	7
Over 3500 kg/m	3	4	6 #	3	4	6
Twin Drum						
600-1000 kg/m	NP	NP	NP	6	NP	NP
1000-2000 kg/m	4	8	NP	3	6	NP
Over 2000 kg/m	2	3	5 #	2	3	4
Vibrating Plate						
1400-1800 kg/m ²	NP	NP	NP	5	NP	NP
Over 1800 kg/m ²	3	6	NP	3	5	7
All Above Plant	For Maximum and Minimum compacted lift thickness see Appendix A2.6, Table A2.2.					
Alternative Compaction Plant for Areas of Restricted Access (including small excavations and trenches less than 200 mm width)						
Vibrotamper 25 kg minimum	Minimum of 6 compaction passes Maximum of 100 mm compacted lift thickness					
Percussive Rammer 10 kg minimum						

Table A8.1

Notes:

NP = Not Permitted .

= Not permitted on wholly cohesive material i.e. clay and/or silt with no particles > 75 micron (µm).

Single drum vibrating rollers are vibrating rollers providing vibration on only one drum

Twin drum vibrating rollers are vibrating rollers providing vibration on two separate drums.

Appendix A9 Alternative Reinstatement Materials (ARMs)/Alternative Technologies (AT)

A9.1 Introduction

A9.1.1 New or alternative materials have been, or may be, developed for use in road construction and maintenance. These materials may allow more rapid, reliable and cost-effective reinstatements, with less dependence on the skill and physical effort of the operators. These materials may also offer significant environmental or practical advantages, and/or cost benefits, compared with conventional materials, including various combinations of the following:

- a) Reduced usage of virgin materials, by including recycled or secondary materials
- b) Lower energy requirements during manufacture and/or laying
- c) Reduced landfill requirements during construction or reconstruction
- d) Self-cementing properties to improve performance, reliability of laying and compaction
- e) Self-levelling or flowable, to avoid or reduce the need for compaction and to provide health and safety benefits
- f) May be placed in fewer lifts

A9.1.2 These materials are termed Alternative Reinstatement Materials (ARMs), and are categorised by this Specification into two generic groups:

- a) Structural Materials for Reinstatements (SMRs)

This generic group is intended to include proprietary or alternative bound reinstatement materials that include a cementitious, chemical or hydraulic binder or are inherently self-cementing. SMRs are categorised as follows:

i) Flowable SMRs (FSMRs)

These materials comprise any type and/or combination of aggregates and binders. They are flowable mixes that should not normally require compaction, and are capable of achieving strengths equivalent to FCRs. These materials may only be used on a trial basis by prior agreement with the Authority and following the approval trial procedure detailed in [Appendix A9](#). Layer thickness and compressive strength requirements shall be in accordance with [Table A9.1](#).

ii) Non-flowable SMRs (NFSMRs)

These materials comprise any type and/or combination of aggregates and binders. They are non-flowable mixes that will normally require compaction on site, and will be capable of achieving strengths equivalent to FCRs in their compacted state. These materials may be used on a trial basis by prior agreement with the Authority and following the approval trial procedure detailed in [Appendix A9](#).

b) Stabilised Materials for Fills (SMFs)

This generic group is intended to include materials derived from excavated spoil, virgin, secondary or recycled materials, or any combination thereof, that have been stabilised or modified by re-processing, re-grading and/or by the inclusion of a cementitious, chemical or hydraulic binder. SMFs are generally non-flowable and shall therefore normally require compaction.

These materials may be used on a trial basis by prior agreement with the Authority and following the approval trial procedure detailed in [Appendix A9](#) or may be deemed to be approved for use without trial if manufactured and used in accordance with SHW clause 840 or BS EN 14227-11.

A9.1.3 ARMs complying with the SHW or BS EN14227 (specific for HBM types) are deemed approved for use as ARMs without a trial.

A9.2 General Requirements for ARMs

A9.2.1 ARMs shall only be used with the prior agreement of the Undertaker and the Authority on an approved trial basis and following the trial procedure described in [Appendix A9](#).

A9.2.2 The producer shall establish and maintain a Quality System which includes policy and procedures for production control. Details that should be included in the manual may be found in the annexe of the appropriate part of BSEN 14227. ARMs shall be produced, handled, transported and used in accordance with the approved mix formulations and procedures proven by prior development and testing.

A9.2.3 Alterations to the proven mix formulations, mix proportions, aggregate type, admixtures, etc. shall not be undertaken without confirmation of their suitability, obtained by further development and testing. The approval of the Authority is required prior to the use of any ARM, subject to the trial procedure, whose formulation has been altered.

A9.2.4 ARMs used within 450 mm of the road surface shall be non-frost susceptible subject to the exceptions referred to in [Section S5.3.1](#).

A9.2.5 Where the Authority is aware of areas with drainage or groundwater problems, it should notify the Undertaker, and where an Undertaker exposes an area with drainage or groundwater problems, it should notify the Authority. Following such notification the Undertaker shall provide, at

backfill and sub-base levels within trench reinstatements, ARMs that are permeable to a degree not less than the surrounding ground. A backfill layer of single size granular material, of 100 mm minimum thickness and surrounded by a geotextile filter fabric where appropriate, may be considered to offer equivalent drainage potential.

- A9.2.6 Where the Authority is aware of any site where high sulphate levels are known to occur, it should notify the Undertaker. Following such notification, any Ordinary Portland Cement based binders in the ARMs shall be replaced with cement having a high sulphate resistance.
- A9.2.7 Where the Authority demonstrates an engineering reason for not using an ARM, the Undertaker shall not use the material without prior agreement.
- A9.2.8 The use of ARMs shall be recorded on the Scottish Road Works Register. This will include supporting information including name of manufacturer, batch numbers etc.
- A9.2.9 Surfacing materials shall not be reinstated until the ARM has attained sufficient strength to allow adequate compaction of asphalt materials and to sustain adequate traffic loading. A simple penetration or indentation or bearing capacity test appropriate to the ARM is recommended to allow confirmation of adequate strength prior to surfacing. Any appropriate standardised test procedure may be used and, with prior experience, will indicate the earliest time at which surfacing should be carried out.
- A9.2.10 Fluid ARMs may flow into damaged drainage or ducting within, or adjacent to, the excavation. Where required, plastic sheeting etc. may provide adequate protection during pouring and curing.

A9.3 Structural Materials for Reinstatements (SMRs)

A9.3.1 Permitted Uses of SMRs

- a) SMRs may be used in any combination of the following, regardless of the nature of reinstatement materials used above and below:
 - i) At any position within the surround to apparatus and/or backfill as the entire layer or combined with any other permitted backfill materials, in any proportion, within any reinstatement.
 - ii) As a sub-base within any reinstatement.
 - iii) As a combined sub-base and base within any reinstatement in Road Types 1, 2, 3 & 4, and as base within any reinstatement in Road Types 3 & 4.
 - iv) As a combined sub-base and binder course, within any reinstatement in footways, footpaths and cycle tracks.
- b) SMRs shall not be used in place of surface course materials.

A9.3.2 General Requirements for SMRs

- a) SMRs shall comply with the minimum layer thickness and compressive strength (R_c Class) requirements shown in [Table A9.1](#).
- b) Where the total thickness of SMR laid exceeds 1000 mm, the minimum crushing strength requirement of C 3/4 shall apply to the top 1000 mm only and a minimum of C 1.5/2 below this depth.

Table A9.1 SMR Minimum Layer Thickness and Compressive Strength Requirements

Layer	Road Type					Footway, Footpath or Cycle Track
	0	1	2	3	4	
Combined Binder Course & Sub-base	NP	NP	NP	NP	NP	150mm C 1.5/2
Base	NP	NP	NP	300 mm C 1.5/2	200 mm C 1.5/2	---
Base & Sub-base	NP	450 mm C 3/4	450 mm C 3/4	450 mm C 1.5/2	350 mm C 1.5/2	---
Sub-base &/or below	150 mm C 1.5/2	150 mm C 1.5/2	150 mm C 1.5/2	150 mm C 1.5/2	150 mm C 1.5/2	100 mm C 1.5/2
Crushing Strength at 28 days	C 3/4 Minimum to C 9/12 Maximum C 1.5/2 Minimum to C 9/12 Maximum					

Table A9.1

Note

NP = Not Permitted (see Appendix [A9.3.1](#))

A9.3.3 Particular Requirements for FCRs and FSMRs

- a) The compressive strength shall be determined in accordance with the principles of BS EN 12390 part 3, with the following exceptions or options:
 - i) Test specimens may be prepared at the time of placement by casting within a test mould, or recovered from site after placement by the extraction of cores from the reinstatement.
 - ii) Specimen shape and dimensions shall be in accordance with BS EN 12390 part 1 with the addition that specimens may also be manufactured with an aspect ratio of 1. Flowable SMR moulds may be manufactured from cellular foam (preferably polystyrene) and include a cellular foam lid. The samples shall not be compacted, except for minimal tamping to allow the mould to be filled without leaving excessive areas of voids.

- iii) Core test specimen top and bottom surfaces may be grouted to ensure flat, parallel loading surfaces.
- iv) Following preparation or recovery, the test samples shall be stored upright at either 20° C or 40° C, depending on the nature of the material, and tested in compression at 28 days after placement of the material on site.
- b) Experience suggests that results obtained from 150 mm test cubes in moulds with cellular foam lids, stored at ambient temperature, are most representative of in-ground conditions.
- c) FCRs and FSMRs shall not normally be tamped or compacted.
- d) FCRs and FSMRs of density less than 1000 kg/m³ may not displace standing water. In excavations containing water, the minimum recommended density for foam concretes is 1050 kg/m³. FCRs may flow into, and block, damaged drainage or ducting within, or adjacent to, the excavation. Where this is found the Undertaker shall inform the authority immediately so the appropriate action can be taken.
- e) FCRs and FSMRs are unlikely to provide significant load bearing capacity for several hours after placement, depending on the ambient temperature. During this time, unguarded reinstatements may be a hazard to children and animals etc. and should be protected.

A9.3.4 Particular Requirements for NFSMRs BS EN 14227

- a) The compressive strength of NFSMRs shall be determined in accordance with the principles of BS 1924 Part 2 Section 4.2, with the following exceptions or options:
 - i) Test specimens may be prepared at the time of placement by compaction of a sample of material within a test mould or, preferably, recovered from site after placement by the extraction of cores from the reinstatement.

- ii) Specimens prepared on site may be placed in conventional steel test cubes or in cylindrical moulds. Compaction shall be applied in order to achieve a specimen density between $100\% \pm 5\%$ of that achieved on site.
 - iii) Core test specimen top and bottom surfaces may be grouted to ensure flat, parallel loading surfaces.
 - iv) Following preparation or recovery, the test samples shall be stored upright at either 20°C or 40°C , depending on the nature of the material, and tested in compression at 28 days after placement of the material on site.
- b) NFSMRs shall normally require compaction to ensure adequate strength. The compaction regime (i.e. details of plant type, weight category, lift/layer thickness and number of passes) shall be specified before the NFSMR is used, and should be obtained by prior development and testing.

A9.3.5 SMR Material Production

A9.3.5.1 FSMR and NFSMR Material Production

- a) FSMRs and NFSMRs shall be prepared in accordance with the procedures set out in the Approval Trial Agreement (see [Appendix A9](#)), to the approved mix formulation(s) (obtained by prior development and testing), in order to achieve the required compressive strength. Binders, additives and admixtures may be included based on prior development and testing.
- b) FSMRs and NFSMRs may be delivered to site as ready-made materials or be prepared partly or wholly on site.
- c) Mixing may be carried out using any equipment, adapted as necessary for the manufacture of FSMRs and NFSMRs in quantities appropriate to the intended use, provided the approved mixing

procedure is used throughout. Mixing equipment should be maintained in accordance with the manufacturer's recommendations and checked regularly. All metering or weighing apparatus should be calibrated regularly according to a Quality Assurance Scheme.

- d) All binders, additives and admixtures, including diluted solutions thereof, should be stored according to the manufacturer's recommendations and used within the recommended shelf life.
- e) NFSMRs shall be compacted in accordance with the manufacturer's recommendations or an agreed compaction regime obtained from prior development and testing.

A9.4 Outline scheme for approval trials

A9.4.1 Trials of ARMs or ATs may be carried under an approval trial agreement between an Undertaker, or Undertakers, Authority/ies and an appropriate Panel set up to agree, monitor and approve its success or failure for use. A RAUC(S) Advice Note dealing with A9 Trials will set out the following:

- The Panel – its constitution and membership,
- The A9 Register – its content and use,
- The A9 Approval Framework – its mission, process, and framework.

Throughout section [A9.4](#) the words “Authority” and “Undertaker” shall be taken to mean “Authority or Authorities” and “Undertaker or Undertakers” respectively

A9.4.2 This section, as well as its Advice Note companion document, outlines the process under which trials of ARMs and ATs must be carried out. The Advice Note gives general guidance relating to the Panel, the Road Authority and the Undertaker of an approval trial. Previous guidance has now been incorporated into this Advice Note.

The Advice Note outlines;

- special conditions relating to the scale of an approval trial and its effect on organisational and reporting matters.
- the intended duties of all parties involved in the approval trial.
- standard list of headings that may describe the key requirements and stages of an approval trial depending on its subject and aims.

The headings (although, not exhaustive) represent the minimum essential information required to ensure that the approval trials are carried out in a controlled and agreed manner. The additional information under each heading is for guidance only and may vary from trial to trial. All parties to an approval trial may, by agreement with the Panel, add, amend or omit any details that do not affect the outcomes and legal standing of the agreement.

A9.4.3 When an ARM or AT has been approved by the Panel following a successful trial, it is updated and registered as so on the official A9 Register that has been setup online for this purpose. An ARM or AT trialled and approved by the Panel must be accepted in authority areas, unless there is a reasonable engineering concern that requires local validation through the Panel (all concerns, successful or rejected, are to be recorded on the A9 Register). Authorities can, within reason, request additional information from the Panel if they have valid engineering concerns and not already dealt with on A9 Register. If the undertaker is unable to satisfy the request for additional information, additional trials may be necessary.

A9.4.4 ARMs and ATs can be used without trials if the authority agrees. However, where no trials have taken place, there is no requirement for another authority to accept the use of those ARMs or ATs. However, if subsequently, the ARMs or AT's used are presented to the Panel for wider use, the historical evidence may be used to promote its use in a wider aspect.

Appendix A10 Not Used

Appendix A11 Bitumen Binder Equivalence

A11.1 Introduction

A11.1.1 In some road types, particular binder grades are not permitted or are not permitted for machine-lay. In general, hand laying is not recommended where the material is likely to be difficult to compact adequately, especially in cold conditions.

A11.2 Base and Binder Course Materials

A11.2.1 Binder grades permitted for Base and Binder Course materials are shown in [Table A11.1](#), provided that the layer thickness is amended to that shown in the table.

Table A11.1 Permitted Base/Binder Course Binder Grades and Layer Thickness

Material	Bitumen Pen Grade	Combined Surface Base/Binder Course (mm)					Surface/Binder Course Only (mm)	
		Road Type					Road Type	
		0	1	2	3	4	3	4
SMA	40/60	345	300	240	160	140	110	110
	70/100	NP	325 H	265	175	145	110	110
	100/150	NP	NP	185	190	150	110	110
AC	40/60	345	300	240	160	140	110	110
	70/100	380 H	325 H	265	175	145	110	110
	100/150	415 H	350 H	285	190	150	110	110
	160/220	NP	NP	NP	NP	195 H	NP	125 H
HRA	40/60	390	335	270	190	150	110	110
	70/100	430 H	370 H	295	225	175	115	115
	100/150	NP	NP	315 H	255 H	195 H	125 H	125 H

Table A11.1

Notes

- 1) NP = Not Permitted
- 2) H = Hand-lay only – not recommended for hot weather & not permitted for machine-lay
- 3) Shaded cells denote the thicknesses for the preferred binder grades noted in [Appendix A2](#) against the binder courses for SMA, AC and HRA.
- 4) Thicknesses for combined binder and base course for Flexible Roads noted in [Appendix A3](#) generally reflect AC material, being the more commonly used material.
- 5) For permitted Surface Course material and thickness see [Table A2.1](#)
- 6) Material immediately below Surface Course shall be Binder Course.

Appendix A12 Reinstatement of Modular Surface Layer

A12.1 Interim Reinstatement

A12.1.1 Where an interim reinstatement is required, the existing modules should be re-used, including the use of broken modules. Where damage has resulted in fragmentation or widespread breakage of modules [subject to the special case of natural material modules (as set out in Appendix [A12.2](#)), then bituminous mixtures may be used for interim reinstatement, provided they meet the performance requirements of Section [S2](#) and that compaction of such mixtures does not result in further damage to adjacent modules.

A12.2 Permanent Reinstatement

A12.2.1 **General**

- a) Permanent reinstatement of modular surface layers should be generally carried out in accordance with BS 7533.
- b) Permanent reinstatement of modules shall include all modules, which are situated within or extend beyond the effective width of the reinstatement (W) described in Section [S2.1.4](#) and shall also include any other modules which are disturbed in the course of carrying out the excavation or reinstatement.
- c) Clean undamaged modules shall be re-used for permanent reinstatement; broken modules shall not be used for permanent reinstatement and shall be replaced.
- d) Bedding material shall be sand or mortar, to match the characteristics of the existing type and thickness. Unless otherwise notified by the Authority, where sand is present, bedding and jointing materials shall

be in accordance with BS7533: Part 3 (where bedding is referred to as laying course). For all roads and footways, the grading of the bedding material shall be in accordance with Table D.3 Category II. Jointing materials to Section D1.2, shall be applied to gaps between individual modules at the time of permanent reinstatement. Where mortar has been used for bedding material the Undertaker shall seek guidance from the Authority as to the specification to be used. This information shall not be unreasonably withheld.

A12.2.2 Requirements for Natural Material Modules

A12.2.2.1 General for whole Natural Material Modules

The reinstatement of whole natural material modules shall be in accordance with the general requirements of Appendix [A12.2.1](#).

A12.2.2.2 Damaged Natural Material Modules

- a) Broken modules shall not be used for permanent reinstatement. Where damaged modules are to be re-used in the reinstatement, the Undertaker should take photographic records prior to commencing work. A joint inspection shall be arranged, to agree the extent of usage of damage modules and the maximum damage acceptable for re-use. This should preferably take place prior to the commencement of excavation, but must take place prior to reinstatement commencing.
- b) The Undertaker shall use its best endeavours to match existing profiles and meet the tolerances specified in Section [S2](#). However, where the pre-existing profile of damaged modules is near or in excess of current intervention and construction tolerances specified in Section [S2](#), it will be difficult for the Undertaker to construct a complying reinstatement. The Undertaker shall use its best endeavours to ensure that the interface between its reinstatement and the adjoining surfaces avoid creating hazardous trips.

A12.2.3 Infills in Modular Reinstatements

A12.2.3.1 General

- a) Gaps greater than 5 mm between the nearest module and the immediately adjacent fixed feature (such as edgings, channel blocks, drainage features, surface boxes, ironware) or boundary feature (such as walls, fences and the like), which are caused as a direct result of any works by the Undertaker, should be filled to the full depth of the adjacent paving module, as follows:
 - i) for smaller gaps, or infills – a 1:4 cement: sand mortar should be used;
 - ii) for larger gaps or infills, where aggregate can be used – a 1:5:3 cement:sand:aggregate concrete infill should be used, with a maximum aggregate size of 10 mm.
- b) Infills should be generally as small as possible, subject to the proviso that where the physical characteristics of the bond, fixed feature, or proximity of other fixed features do not allow for a small infill, then best endeavours should be used to achieve the smallest infill possible.
- c) Infills should match existing work by the Authority.

A12.2.3.2 Infill Widths and Limitations

- a) Where possible, infills should be limited to a maximum width of 50 mm in all modular areas, irrespective of whether the existing footway area was originally constructed in accordance with BS7533.
- b) In the case of modules where one side of the module is greater than 300 mm, there are instances where it shall be permissible to increase the width of the infill to a maximum of 150 mm, in order to achieve a better engineering and aesthetically pleasing reinstatement. These include instances where the intervening distance is less than 150 mm:

- i) between the Undertaker's newly laid apparatus and the nearest module (on any side); or
 - ii) between two or more pieces of Undertaker's newly laid apparatus;
- or
- iii) to an existing fixed or boundary feature.

Where it can be shown to be acceptable custom and practice, in exceptional cases, the maximum permissible infill width may be increased to 200 mm, for irregularly shaped apparatus. Typical examples are in Appendix [NGA12](#).

- c) In the case of modules where all sides are 300 mm or less, there are similarly instances where it is permissible to increase the width of the infill to the same as the full width of module (measured on the shortest side), again in order to achieve a better engineering and aesthetically pleasing reinstatement. These include instances where the intervening distance is less than the full width of a module plus 25 mm (measured on the shortest side):
 - i) between the Undertaker's newly laid apparatus and the nearest module (on any side); or
 - ii) between two or more pieces of Undertaker's newly laid apparatus;

or

 - iii) to an existing fixed or boundary feature.

Typical examples are in Appendix [NGA12](#).

A12.2.3.3 Acceptable localised loss of Modular Pattern

- a) Physical characteristics may prevent or limit the possibility of completing a uniform and closely matching modular reinstatement immediately adjacent to features. The physical characteristics of the module itself, the existing as-laid bond, as well as the physical characteristics of the fixed or boundary feature, may individually or collectively contribute to such a situation.
- b) In all instances, the Undertaker should attempt to minimise the width of the infill. However, the following exceptions are permissible:
 - i) Where the above physical characteristics are present, permanently reinstated modules immediately adjacent to the feature may be laid with a degree of localised loss of bond pattern. The introduction of a stringer (or in some cases, soldier) course immediately adjacent to the feature should not be considered as a loss of bond pattern. The loss of bond pattern should be limited, where practicable, to the first two rows beyond any stringer course, being laid in such a manner as to aesthetically integrate with the surrounded bond pattern. Typical examples are indicated in Appendix [NGA12](#).
 - ii) If adjacent modules abut an existing, contiguous infill, such as at a property boundary, then the infill shall match the existing.
 - iii) In the case of fixed features that are not rectangular, there is no requirement to cut modules to match the edge profile of the fixed feature to otherwise reduce the infill at irregular edges.
 - iv) Where localised custom and practice adopted by the Authority for its own works differs to the above, infills may be laid to a standard consistent with that of the Authority.

A12.3 Provision of Replacement Modules

A12.3.1 Where insufficient modules remain for reinstatement use and procurement of identical replacement modules is no longer reasonably practicable, then a similar colour, shape and size shall be the preferred order of criteria in the choice of acceptable replacements.

A12.3.2 Where replacement modules are required due to breakages caused during the course of the Undertaker's works, the Undertaker shall reinstate using modules purchased at the Undertaker's expense.

A12.3.3 Where replacement modules are not available discussion should take place with the authority on an alternative module or to see if they have an alternative supply.

A12.3.4 If a Roads Authority is using non-standard modules for reinstatement use, then these should be recorded in the Scottish Road Works Register, with an indication of type, procurement timescales and material suppliers.

A12.4 Pre-existing Surface Damage Outside Limits of Undertaker's Works

A12.4.1 Some pre-existing modular surfaces outside the limits of the Undertaker's works may be broken or have settled or deformed. Where the existing profiles are near or exceed the current intervention and construction tolerances specified in Section S2, it will be difficult for the Undertaker to construct a complying reinstatement. Subject to the Authority agreeing to meet the costs of the works necessary to reinstate the surfaces outside the limits of its works, the Undertaker shall extend its reinstatement works to include such surfaces. In the absence of agreement, the Undertaker shall be under no obligation whatsoever to extend its reinstatement works but shall use its best endeavours to ensure that the interface between its reinstatement and the adjoining surfaces avoid creating hazardous trips. In such situations, it must be recognised that it may be necessary to install different sized modules or fillets to minimise surface irregularities at the

interfaces. The Undertaker shall use its best endeavours to match existing materials and profiles and meet the tolerances specified in Section [S2](#).

A12.4.2 If a Roads Authority is using non-standard modules for reinstatement use, then these should be recorded in the Scottish Road Works Register, with an indication of type, procurement timescales and material suppliers.

A12.4.3 Where the area of permanent reinstatement needs to be substantially extended, to include an existing area of broken or settled modular surfacing, the Undertaker should notify the Authority prior to the commencement of works, see Appendix [S2.10](#).

NG0 Notes for Guidance

NG0.1 Preamble to the Specification

There are no Notes for Guidance for the Preamble

NG1 Introduction

NG1.1 General

- NG1.1.1** The primary objectives of this Specification are to ensure that all Undertakers' reinstatements, within roads, are completed to a permanent standard, as soon as is practicable and to a consistent high quality. Undertakers and Authority personnel should work together, in close co-operation, in order to achieve these objectives.
- NG1.1.2** This Specification may require a joint inspection of any reinstatement site, depending on the existing site conditions, before the commencement of works. Such joint pre-inspections may be of an informal nature, by agreement, and should be carried out at the earliest convenience of both parties. Where either party fails to attend any agreed pre-inspection, or where existing site conditions warrant concern, it is recommended that the Undertaker retains a photographic record of the existing surfaces, prior to the commencement of works.
- NG1.1.3** This Specification may require a formal notification of circumstances or other requirements, depending on the existing conditions of any reinstatement site, prior to the commencement of works. Such pre-notifications should be issued at the earliest possible opportunity. Undertakers shall comply with such notification issued at the road works notice stage, and should make reasonable efforts to comply with any notification issued thereafter.
- NG1.1.4** Where this Specification allows several options, it is recommended, wherever practicable, to agree a preferred option from the alternatives available. This principle should be applied to all sections where alternatives are provided.

NG1.2 Guarantee Period

- NG1.2.1** Where an Authority intends to resurface or reconstruct a section of road, the Undertaker may complete any reinstatement to an alternative interim standard, by agreement. The guarantee period shall thereafter be waived, unless the Undertaker's reinstatement can be shown to be grossly substandard. It is expected that agreement to this procedure will be conditional upon all savings in costs made by not carrying out a permanent reinstatement being shared, equally, between the Undertaker and the Authority.
- NG1.2.2** Where site circumstances are considered to mitigate against a successful permanent reinstatement, an additional interim period of up to a further 6 months may be adopted, before it is necessary to complete the permanent reinstatement.
- NG1.2.3** In designated high amenity locations and areas with high quality surfaces there is benefit in completing the permanent reinstatement immediately or as expeditiously as possible. To facilitate a permanent reinstatement, materials need to be identified and ordered early in the works planning process. Advance notification through the Scottish Road Works Register is necessary to achieve this and the Authority should assist the Undertaker to locate sources of suitable similar or equivalent modules, especially if no stocks are available from the Authority itself.

NG1.3 Road Categories

- NG1.3.1** Road categories 0 to 4 are based on the number of millions of standard axles (msa) carried by the road over a 20-year period. Reinstatements are designed on this basis. The traffic loading is calculated in accordance with CD 224.
- NG1.3.2** [Table NG1.1](#) has been prepared in accordance with the DMRB, showing the maximum AADF in one direction in commercial vehicles per day (cvd) for a single carriageway road, or for both lanes of a dual carriageway, for

all road types and all likely traffic growth rates. Appropriate AADF rates for intermediate years within each five-year period can be calculated by interpolation.

Table NG1.1 Maximum commercial vehicle traffic per road type

Year of traffic count	Daily traffic flow - Commercial vehicles/day one direction - Single or dual carriageway					Average growth rate %
	Type 4	Type 3	Type 2	Type 1	Type 0	
0	66	240	638	1383	4499	0
5	66	240	638	1383	4499	
10	66	240	638	1383	4499	
15	66	240	638	1383	4499	
20	66	240	638	1383	4499	
0	60	217	578	1253	4079	1
5	62	226	601	1304	4245	
10	65	237	632	1370	4461	
15	68	249	664	1440	4689	
20	72	262	698	1514	4928	
0	54	196	521	1132	3690	2
5	58	212	564	1225	3994	
10	64	234	623	1353	4410	
15	71	259	687	1494	4869	
20	78	286	759	1649	5376	
0	49	176	469	1020	3333	3
5	55	198	528	1148	3751	
10	64	230	612	1331	4349	
15	74	266	709	1543	5041	
20	86	309	822	1789	5844	
0	43	157	420	916	3005	4
5	50	184	491	1072	3515	
10	61	223	598	1304	4277	
15	74	272	727	1586	5204	
20	91	331	885	1930	6331	
0	39	140	375	821	2704	5
5	47	170	456	998	3287	
10	61	317	582	1274	4195	

Table NG1.1 Maximum commercial vehicle traffic per road type (cont)

Year of traffic count	Daily traffic flow - Commercial vehicles/day one direction - Single or dual carriageway					Average growth rate %
	Type 4	Type 3	Type 2	Type 1	Type 0	
15	77	277	742	1626	5354	
20	99	354	948	2075	6833	
0	35	125	334	734	2430	6
5	44	158	422	927	3068	
10	59	211	564	1240	4105	
15	79	283	755	1660	5494	
20	106	378	1011	2221	7352	
0	31	111	297	655	2180	
5	41	145	389	859	2858	
10	57	204	546	1204	4008	
15	80	286	766	1689	5621	
20	112	401	1074	2369	7884	
0	27	98	263	584	1953	8
5	37	133	358	795	2657	
10	54	196	526	1167	3904	
15	79	288	772	1715	5736	
20	117	423	1135	2520	8429	

Table NG1.1

Note: The datum for year 0 is the time of the reinstatement

NG1.3.3 The national network of roads carrying up to 125 msa within a 20-year period and classified as Types 0 to 4 roads according to the requirements of this Code will yield a distribution similar to that shown in [Table NG1.2](#).

Table NG1.2 Estimated highway classification	
Road Type	% of total
0	< 1
1	< 1
2	< 5
3	< 9
4	> 84

Table NG1.2

NG1.3.4 It is expected that roads in any authority area will show a distribution similar to that shown in [Table NG1.2](#), although there will be some local variations. In future years, there may be cases where traffic flows change to such a degree that re-classification will be necessary

NG1.4 None

There are no Notes for Guidance for section 1.4.

NG1.5 None

There are no Notes for Guidance for section 1.5

NG1.6 Alternative Options

NG1.6.1 New Materials

NG1.6.1.1 Research into new or improved reinstatement materials is often undertaken by various organisations and such work may produce materials that perform as well as, or better, than those given in this Specification. In order to allow such materials to be proven by development testing, the materials and relevant layer thickness quoted in this Specification may be amended or supplemented, subject to prior agreement with the Authority.

NG1.6.2 Local Materials

NG1.6.3 Materials may be available locally that have not been defined in any national Specification, but which, by experience, are known to give

acceptable performance in service. In order to allow the use of such local materials, the materials and relevant layer thickness quoted in this Specification may be amended or supplemented, subject to prior agreement with the Authority.

NG1.6.4 Alternative compaction equipment

NG1.6.4.1 Alternative compaction equipment, including any compaction device, not specifically permitted within Section [S10](#) and [Appendix A8](#), may be permitted, provided it has been proven to be capable of achieving the performance requirements permitted in Section [S10](#), [Appendix A2](#) and/or [Appendix A8](#).

- a) For all compaction plant not shown in [Appendix A8](#), an approved operating procedure should be established, by development testing, in an appropriate trench environment with the relevant material options to meet the performance requirements permitted in Section [S10](#), [Appendix A2](#) and/or [Appendix A8](#). The development testing may be verified by an independent, accredited laboratory.
- b) Where alternative compaction plant is intended to be used on more than one type of material, as defined in [Appendix A8](#), an approved compaction procedure shall be established, as defined in Section [NG1.6.4](#) a) above, for each intended category of material.

NG1.7 Immediate Works

NG1.7.1 The minimum thickness of bituminous surfacing material, required by Section [S1.7.1](#) for the reinstatement of all immediate works, is 40 mm. A greater thickness may be required, in areas subject to frequent or heavy traffic, if further remedial works, during the 10 days permitted duration of immediate works, are to be avoided.

NG1.8 Apparatus Within the Road Structure

NG1.8.1 Some apparatus may already be present at shallow depth, within many existing road structures and special requirements may apply to their reinstatement. Both the Undertaker and the Authority are likely to have particular criteria and this Specification may be altered, or supplemented, subject to prior agreement, to accommodate any such requirements.

NG1.8.2 Not all new apparatus will need to be installed to the full depth or width expected by this Specification; an example is small diameter cabling and/or ducting for telecommunications, traffic controls, etc. This Specification may be altered, or supplemented, subject to prior agreement with the Authority, to accommodate these applications. Shallow apparatus should be recorded.

NG1.9 Geosynthetic Materials, Geotextiles and Reinforcement Grids

NG1.9.1 Where these materials are used, the manufacturer's instructions shall be followed, particularly in relation to appropriate overlaps, fixing and the like.

NG1.10 Trees

NG1.10.1 Prohibited, Precautionary and Permitted Zones

NG1.10.1.1 PROHIBITED ZONE – 1 m from trunk. Excavations of any kind must not be undertaken within this zone unless full consultation with Local Authority Tree Officer is undertaken. Materials, plant and spoil must not be stored within this zone.

NG1.10.1.2 PRECAUTIONARY ZONE – beneath canopy or branch spread. Where excavations must be undertaken within this zone the use of mechanical excavation plant should be prohibited. Precautions should be undertaken to protect any exposed roots. Materials, plant and spoil should not be stored within this zone. Consult with Local Authority Tree Officer if in any doubt.

NG1.10.1.3 PERMITTED ZONE – outside of precautionary zone. Excavation works may be undertaken within this zone however caution must be applied and the use of mechanical plant limited. Any exposed roots should be protected.

NG1.10.2 Precautions during Excavation and Reinstatement

NG1.10.2.1 THE PROHIBITED ZONE

Do not excavate within this zone.

Do not use any form of mechanical plant within this zone.

Do not store materials, plant or equipment within this zone.

Do not move plant or vehicles within this zone.

Do not lean materials against, or chain plant to, the trunk.

Do contact the local authority tree officer or owner of the tree if excavation within this zone is unavoidable.

Do protect any exposed roots uncovered within this zone with dry sacking.

Do backfill with a suitable inert granular and top soil material mix as soon as possible on completion of works.

Do notify the local authority tree officer or the tree's owner of any damage.

NG1.10.2.2 THE PRECAUTIONARY ZONE

Do not excavate with machinery. Where excavation is unavoidable within this zone excavate only by hand or use trenchless techniques.

Do not cut roots over 25mm in diameter, unless advice has been sought from the local authority tree officer.

Do not repeatedly move / use heavy mechanical plant except on hard standing.

Do not store spoil or building material, including chemicals and fuels, within this zone.

Do prune roots which have to be removed using a sharp tool (e.g. secateurs or handsaw). Make a clean cut and leave as small a wound as possible.

Do backfill the trench with an inert granular material and top soil mix. Compact the backfill with care around the retained roots. On non-road sites backfill only with excavated soil.

Do protect any exposed roots with dry sacking ensuring this is removed before backfilling.

Do notify the local authority tree officer or the tree's owner of any damage.

NG1.10.2.3 THE PERMITTED ZONE

Do not cut roots over 25 mm in diameter, unless advice has been sought from the local authority tree officer.

Do use caution if it is absolutely necessary to operate mechanical plant within this zone.

Do prune roots which have to be removed using a sharp tool (e.g. secateurs or handsaw). Make a clean cut and leave as small a wound as possible.

Do protect any exposed roots with dry sacking ensuring this is removed before backfilling.

Do notify the local authority tree officer or the tree's owner of any damage.

NG1.11 None

There are no Notes for Guidance for section 1.11.

NG2 Performance Requirements

NG2.1 None

There are no Notes for Guidance for section 2.1.

NG2.2 Surface Profile

NG2.2.1 There are no Notes for Guidance for section 2.2.1

NG2.2.2 Edge Depression – Intervention

NG2.2.2.1 Freedom from excessive edge depressions, or ‘trips’, for all pedestrians and two wheeled vehicles, is considered to be one of the most important performance requirements. Given that pedestrians and various two wheeled vehicles are likely to use or cross any roads, footways and cycle tracks, it is considered necessary to set a single limit for all edge depressions.

NG2.2.3 Surface Depression – Intervention

NG2.2.3.1 Excessive surface depressions will reduce ride quality and give rise to noise and vibration. The maximum depth of surface depression within the area of a reinstatement is limited to approximately 2.5% of the width of reinstatement, which represents a mean slope of 1 in 20 (5% gradient). In order to prevent excessive areas of standing water, it is considered necessary to limit the maximum depth of a surface depression to 25 mm, when the width is ≥ 900 mm, see [Table S2.1](#).

NG2.2.4 Surface Crowning – Intervention

NG2.2.4.1 Excessive surface crowning will reduce ride quality and give rise to noise and vibration. The maximum height of crowning within the area of a reinstatement is limited to approximately 2.5% of the width of the reinstatement, which represents a mean slope of 1 in 20 (5% gradient). In order to prevent excessive surface irregularity, it is considered necessary

to limit the maximum height of crowning to 25 mm, when the width is \geq 900 mm, see Table S2.1.

NG2.2.5 Combined Defect – Intervention

NG2.2.5.1 The intervention limits specified for surface depressions and surface crowning include a reduction in the intervention limit, to 80% of the tabulated value, subject to a minimum of 10 mm, where surface depressions and/or crowning and/or edge depressions abut. The individual features shall be measured, and the reduction applied, as follows:

a) Combination Depressions

Where an edge depression abuts an area of surface depression, then the area of abutting depression should be measured as shown in [Figure NG2.1](#). Any surface crowning also abutting the area of combined depressions should be measured separately, as shown in [Figure NG2.2](#). The permitted depth of a combination depression is further limited if the depression results in standing water.

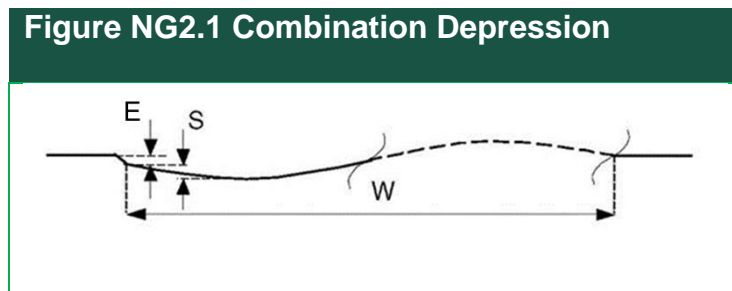


Figure NG2.1

E = Edge Depression Contribution = 10 mm

S = Surface Depression Contribution = 10 mm or 80% of tabulated value
(whichever is the greater)

b) Combination Crowning

Where an area of surface crowning abuts an edge depression, or a surface depression, or any combination thereof, then the area of abutting crowning should be measured as shown in [Figure NG2.2](#). The area of abutting depression should be measured separately, as shown in [Figure NG2.1](#). The maximum height of combination crowning is further limited if the crowning results in standing water.

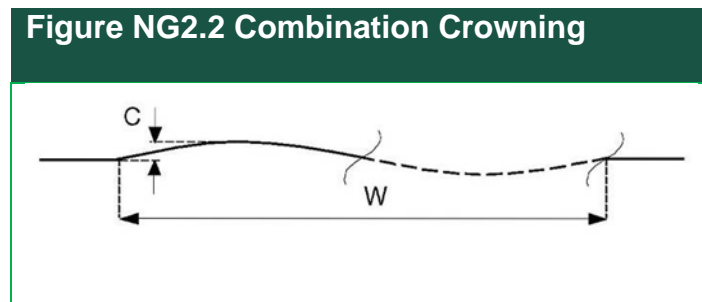


Figure NG2.2

$C = \text{Surface crowning contribution} = 10 \text{ mm or } 80\% \text{ of tabulated value (whichever is the greater)}$

NG2.2.6 There are no Notes for Guidance for section 2.2.6

NG2.3 Fixed Features

NG2.3.1 Fixed features, e.g. kerbstones and related precast concrete products, channel blocks and drainage fixtures, surface boxes and ironware, should be bedded on a sound foundation, in accordance with the owner's requirements. In order to prevent excessive areas of standing water, it is considered necessary to set separate intervention limits for channel blocks, drainage fixtures, surface boxes and ironware.

NG2.4 Surface Regularity

NG2.4.1 Where the use of a rolling straightedge is not permitted, the surface regularity shall be assessed on an agreed basis.

NG2.5 Structural Integrity

NG2.5.1 Reinstatement materials and compaction requirements have been specified in order to safeguard the pavement structure, both within and adjacent to the reinstatement. Any substantial or rapid settlement within a reinstatement may therefore indicate a potential reduction in the stability of the adjacent pavement structure, as well as potential defects within the reinstatement.

NG2.5.2 There will be cases, in adverse circumstances, where the correct application of this Specification, in all respects, will still result in levels of settlement within the reinstatement that do not meet the requirements of Section [S2.5](#). For example, the type and condition of the adjacent ground and/or pavement structure may limit the degree of compaction that can be achieved, so influencing the amount of settlement that could occur.

NG2.5.3 Any engineering investigation is intended only to determine the likelihood and extent of any further settlement, and the most cost-effective and convenient method of restoring the structural stability and surface performance of failed sections of a reinstatement, to a satisfactory condition.

NG2.6 Skid Resistance

NG2.6.1 An adequate skid resistance of the reinstated running surface must be maintained, by selection of the polished stone value (PSV), aggregate abrasion value (AAV) and texture depth of the aggregate exposed at the road surface. The exposed aggregate may be precoated chippings rolled into the surface (HRA), coarse aggregate within the surface course, BS 594987 or any chippings or other aggregate applied in any form of surface dressing or slurry sealing treatment.

- NG2.6.2** Smaller reinstatements constitute a much lower degree of skidding risk, but the measurement of skid resistance, texture depth and surface regularity become progressively more difficult as the reinstatement width reduces. However, material requirements and laying conditions remain unchanged and it is expected that the skid resistance of smaller reinstatements will not be significantly different.
- NG2.6.3** For the purposes of identifying reinstatement sites where the risk of skidding is potentially high (Site A), sections of carriageway of greater than 10% gradient should be identified from existing steep hill warning signs or by notification from the Authority. Similarly, bends of less than 100 metres radius in roads where the speed limit is greater than 40 mph (65 kph) should be identified from existing bend, double bend or chevron warning signs or by notification from the Authority.
- NG2.6.4** Given good site conditions, it is possible to obtain reasonably representative measurements of skid resistance and surface regularity on narrower reinstatements but amended test procedures and/or extra care are required. The TRL Mini Texture Meter and TRL Rolling Straightedge should always be fully contained within the limits of the reinstatement. The actual minimum practicable width for these instruments will depend on the trench alignment and radius of curvature. Measurements can be particularly difficult when testing on tight radius bends.
- NG2.6.5** The Undertaker should require the suppliers of bituminous materials to regularly supply details of the constituent materials within their bituminous mixtures and in particular PSV/AAV test results for the coarse aggregate in Surface Course mixtures and the aggregate used for precoated chippings in HRA.
- NG2.6.6** A review of the DMRB CD 236 and the SRRB research paper Providing Appropriate Levels of Skid Resistance has indicated that the minimum values noted in [Table S2.6](#) are appropriate in most cases.

NG2.7 None

There are no Notes for Guidance for section 2.7.

NG2.8 None

There are no Notes for Guidance for section 2.8.

NG2.9 None

There are no Notes for Guidance for section 2.9.

NG2.10 None

There are no Notes for Guidance for section 2.10.

NG3 Excavation

NG3.1 Breaking the Surface

NG3.1.1 High Amenity and Natural Materials Surfaces

NG3.1.1.1 When excavating in modular construction within high amenity areas, or in natural materials within any footway area (as defined in Section [S1.4](#)), the Undertaker shall lift the existing modules carefully and store for re-use.

NG3.1.1.2 More recent construction tolerances of existing modules often make it unlikely that the first module in an individual excavation can be lifted without the module itself being damaged. In such circumstances, this damage may be inevitable, but it is expected that the damage is limited to only one module in an individual excavation.

NG3.1.2 The shape and line of larger trenches and their reinstatement should have regard wherever possible to the aesthetic appearance.

NG3.2 Excavation

NG3.2.1 HSG 185 “Health and Safety in Excavations” and HSG 47 “Avoiding Danger from Underground Services” give guidance to those carrying out excavations.

NG3.2.2 Where possible, all excavations should be planned before commencement of works on site.

NG3.2.3 Work must be undertaken and supervised by properly qualified personnel.

NG3.3 None

There are no Notes for Guidance for section 3.3.

NG3.4 Side Support

Where required, there must be sufficient quantities of appropriate plant available to provide safe trench support.

NG3.5 None

There are no Notes for Guidance for section 3.6.

NG3.6 None

There are no Notes for Guidance for section 3.6.

NG3.7 None

There are no Notes for Guidance for section 3.7.

NG4 Surround to Apparatus

NG4.1 General

NG4.1.1 It is often necessary for an Undertaker to require a specific type or quality of material, and/or special protective components, to be laid within the immediate vicinity of certain types of underground apparatus. This material is usually referred to as the surround to the apparatus, and may include fine unbound granular materials (usually termed 'finefill'), bound materials, tiles, covers, tubular shields, etc., or any combination thereof. The resulting surround may be required for a variety of reasons, including structural support, low corrosion potential, protection for non-metallic materials or special coatings, etc.

NG4.1.2 The nature of the Undertakers apparatus, and/or the protective features of the surround, especially any fine unbound granular materials used within the surround, may impose additional restrictions on the type of compaction equipment that can be used and the necessary operating procedures. However, the entire surround will effectively form a foundation structure for the remainder of the reinstatement and must be capable of providing adequate support for all loading imposed on the reinstatement surface, as well as the weight of the reinstatement structure.

NG4.1.3 In selecting a material for the surround to apparatus, Undertakers should be mindful of the potential for the migration of fines from the adjacent ground, and/or the overlying backfill, into any surround material that is open-textured. Such migration will normally result in settlement of the adjacent ground, and/or the backfill. Migration of fines can be prevented by using a close textured surround or, if this is undesirable, by enclosing the surround within a suitable filter membrane.

NG5 Backfill

NG5.1 Backfill Material Classification

The assumed limiting performance of the five classes of backfill material defined in [Appendix A1](#) is shown in [Table NG5.1](#).

Table NG5.1 Backfill Material Performance	
Backfill Material Class	Material Performance % CBR
A	Over 15
B	7 to 15
C	4 to 7
D	2 to 4
E	Less than 2

Table NG5.1

NG5.2 None

There are no Notes for Guidance for section 5.2.

NG5.3 Additional Requirements

NG5.3.1 Frost Heave Susceptibility

NG5.3.1.1 The frost heave test described in BS 812: Part 124 (as amended by SHW Clause 801.8) is costly and time consuming and is not suitable for routine on-site control checks. The test is primarily intended as a method to establish whether an aggregate from a particular source is likely to be frost susceptible when used in road pavement construction. Material for the frost heave test must be representative of the source or sub-grade encountered. Authorities usually maintain a list of “Approved Suppliers of Non-frost Susceptible Materials” and should have knowledge of frost susceptible sub-grades in their locality.

NG5.3.1.2 The following notes on identification of potentially frost heave susceptible material are for guidance but are not, in themselves, exhaustive:

- a) Clay materials can be regarded as non-frost susceptible, particularly when the plasticity index is greater than 15%. Clay/silt mixtures are more difficult to assess and are likely to be of marginal frost susceptibility.
- b) Silts, particularly those with more than 10% passing a 75 micron (μm) BS sieve size, are likely to be frost susceptible.
- c) Cohesive/granular materials will often be frost susceptible; the quantity and type of granular aggregate and, to a lesser degree the silt fraction are the controlling factors. If the aggregate is a frost susceptible type, then it is very probable that the mixture will also be frost susceptible.
- d) Granular materials with more than 10% passing a 75 micron (μm) BS sieve size have a high potential for frost susceptibility and granular materials with more than 12% passing 75 micron (μm) are likely to be frost susceptible.
- e) All crushed chalks are frost susceptible and the magnitude of the frost heave will increase with the saturation moisture content of the chalk.
- f) Oolitic and magnesium limestones are likely to be frost susceptible, particularly those where the aggregate saturation moisture content exceeds 3.5%.
- g) Hard carboniferous limestones are unlikely to be frost susceptible unless they have been contaminated with clay or have more than 12% passing 75 micron (μm).
- h) Crushed granites will only be frost susceptible if the percentage passing 75 micron (μm) exceeds 12% and is partially plastic.

- i) 'As dug' sands and gravels are frequently frost susceptible especially if the percentage passing 75 micron (μm) BS sieve size is greater than 12% or if it is plastic. Sands and gravels won by "wet working" techniques are unlikely to be frost susceptible unless contaminated by a clay or a high silt fraction.
- j) Burnt colliery shales, slags, PFAs, etc. are secondary materials, and it is not possible to give general guidance to their potential for frost heave resistance. Each source is different and will need to be assessed by the frost heave test. The exception to this is graded bottom furnace ash produced by modern power stations, which has been found to be non-frost susceptible.
- k) Foamed concretes can generally be regarded as non-frost susceptible.

NG6 Flexible and Composite Roads

NG6.1 None

There are no Notes for Guidance for section 6.1

NG6.2 Sub-base Reinstatement

NG6.2.1 An adequately compacted sub-base should achieve an in-situ CBR value in excess of 30%.

NG6.2.2 It is expected that a bituminous sub-base will only be selected where the Base is also bituminous.

NG6.2.3 When placing bituminous material directly on to the backfill it is important to ensure that the exposed surface of the backfill has been compacted. This operation is essential to minimise the risk of a build up of pore water pressure causing the subgrade to become spongy. It is also imperative that construction is phased such that excavated areas are covered, on the same day, with the first layer of bituminous material, to prevent the ingress of water. Care should be taken in the compaction of this first layer. If pore water pressure builds up in the backfill at this stage, then rolling should cease and the material left overnight, or longer if necessary, prior to the placement of any further layers.

NG6.2.4 The condition of sub-base material can be assessed using Field Identification Test No. 3 in [Appendix A1](#).

NG6.3 Base Reinstatement

NG6.3.1 Overlaid Modular Layers

NG6.3.1.1 This Specification permits the re-use of cobbles and setts for the reinstatement of the relevant layer. However, it is often extremely difficult to achieve a performance from such reinstatements that is similar to that

of the original, i.e. well interlocked and 'stress hardened' layer. Failure to achieve this structural stiffness could result in failure of the reinstatement and particularly any surfacing materials laid thereon.

NG6.3.1.2 The Specification does not permit the re-use of penning, in which the layer of modules is laid upright, in an interlocking manner, exhibiting a greater stiffness than an equivalent layer of cobbles/setts.

NG6.4 Surface Reinstatement

NG6.4.1 Hot Rolled Asphalt Surfaces

NG6.4.1.1 HRA design mixtures give better resistance to deformation where queuing of heavy traffic is likely to occur and may be more economical to lay.

NG6.4.1.2 Type C mixtures use fine aggregates of a coarser grading than Type F mixtures, usually associated with the use of crushed rock fines. Such mixtures tend to be stiffer and less well suited to the reinstatement of small excavations.

NG6.4.2 There are no Notes for Guidance for section 6.4.2.

NG6.4.3 There are no Notes for Guidance for section 6.4.3.

NG6.4.4 There are no Notes for Guidance for section 6.4.4.

NG6.4.5 Asphalt Concrete Surface Course Materials

NG6.4.5.1 There are no Notes for Guidance for section 6.4.5.1.

NG6.4.5.2 High Friction Surfacing

a) High friction surfacings will usually have been laid for safety reasons and should be reinstated as soon as is practicable consistent with the manufacturer's specification.

b) Performance on concrete may not be as good as on bituminous surfacings and the suitability of a system should be checked by

reference to its Product Acceptance Scheme Certificate.

- c) Suppliers of some high friction surfacing systems may have specific requirements relating to the condition of the surface to which it is to be applied. Guidance on this should be sought either from the supplier or the Product Acceptance Scheme Certificate and only HFS that can be applied within the required timescale will be used.

NG6.4.5.3 Porous Asphalt

- a) Edge sealing requirements specified in Section [S6.5.2.2](#) may not be appropriate with porous asphalts because the free-flow characteristics of the material may be impeded (refer to manufactures specification requirements).
- b) Application rates in this Specification are quoted in kg/m² of residual bitumen. This differs from the previous Specification, which quoted rates in l/m² of total emulsion. For example, the rate of 0.50 kg/m² residual bitumen equates approximately to 1.2 l/m² of K1-40 or 0.80 l/m² of K1-60 emulsion.

NG6.4.5.4 Coloured Surfacing

- a) Coloured surfacings are sometimes used for marking bus lanes, accident prevention measures, traffic prioritisation schemes, etc. The use of warning signs, e.g. "Temporary Road Surface", should be considered until the special surface can be restored.
- b) It may not be possible to obtain coloured surfacings in a wide selection of colours and Authorities may have to accept limitations in colour matching. In addition, coloured surfacings can fade or undergo other changes in colour as the materials age.

NG6.4.5.5 Other Specialist Surfacing Materials

Texture depth requirements specified in Section [S2.6.2](#) may not be appropriate for the increasing number of specialist surfacing materials currently being used by some Authorities.

NG6.4.5.6 Surface Treatments

In all roads, where the overall quality of existing surface or surface treatments are to a high standard, it may be difficult to produce small excavations or narrow trenches with surface treatments that closely and uniformly match the existing adjacent surfaces. Under such circumstances, some localised variation in surface quality may be acceptable to the Authority.

NG6.4.5.7 There are no Notes for Guidance for section 6.4.5.7.

NG6.4.5.8 There are no Notes for Guidance for section 6.4.5.8.

NG6.4.5.9 There are no Notes for Guidance for section 6.4.5.9.

NG6.4.5.10 There are no Notes for Guidance for section 6.4.5.10.

NG6.4.5.11 There are no Notes for Guidance for section 6.4.5.11.

NG6.4.5.12 There are no Notes for Guidance for section 6.4.5.12.

NG6.4.5.13 There are no Notes for Guidance for section 6.4.5.13.

NG6.5 Base and Edge Preparation

NG6.5.1 Base Preparation

NG6.5.1.1 Bond coating materials are generally based on rapid curing anionic or cationic bitumen emulsions to BS 434, with approximately 40% bitumen content. New bond coating materials are becoming available and the trial use of more modern variants is recommended.

NG6.5.1.2 Application rates in this Specification are quoted in kg/m² of residual bitumen. For example, the rate of 0.15 kg/m² residual bitumen equates approximately to 0.35 l/m² of 1-40 or 0.25 l/m² of K1-60 emulsion.

NG6.5.1.3 Further guidance on application of bond coats can be found in BS 594987.

NG6.5.2 Edge Preparation

NG6.5.2.1 Edge sealant materials are generally based on rapid curing bitumen emulsions to BS EN 13808, typically in the range 40 to 100 pen and approximately 70% bitumen content, or hot bitumens to BS EN 12591 typically 50 or 70 pen. An increasing number of high build and rubberised edge sealants are becoming available and, in general, are preferred. Alternatives to these materials exist and, if there are any doubts as to their effectiveness, they may be used on a trial basis ([Appendix A9](#)).

NG6.5.2.2 When using edge sealant materials, strict adherence to manufacturer's instructions is essential. Dependant on weather conditions brushed sealant drying times may vary between 5 minutes and 2 hours, whilst spray sealant times may vary between 1 and 15 minutes before reinstatement can take place.

Additionally prior to application:

- a) All excess water and loose material should be removed from the cut faces of the reinstatement; and
- b) All bound vertical edges must be clean and free from slurry and dust etc. with the stone in the existing layers clearly visible.

NG6.5.2.3 The examples in Table NG6.1 illustrate the results of edge sealant application under different edge conditions:

- a) [Table NG6.1](#): – dry and clean;
- b) [Table NG6.2](#): – wet;

c) [Table NG6.3](#): – dirty and damp.

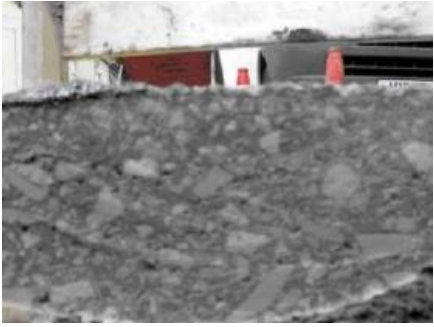







Table NG6.1 Dry and Clean Examples		
	Photo A	Dry/Clean Edge Conditions Good Bonding (Weather: Dry, Warm, Overcast)
	Photo B	First application of edge sealant or edge sealing system.
	Photo C	Second application of edge sealant or edge sealing system to top of reinstatement edge following compaction of first reinstatement lift.
	Photo D	Core Comments: <ul style="list-style-type: none"> • Core taken through joint shows that edge sealant or edge sealing system has adhered to vertical edge; • A good bond observed between reinstatement and adjacent surfacing.
Overall Comments: Reinstatement edge was clean, free of dust or 'caked' saw coolant.		

Table NG6.1

Table NG6.2 Wet Examples

	<p>Photo A</p>	<p>Wet Edge Conditions Poor Bonding (Weather: Dry, Hot, Sunny) Coating of slurry on saw-cut edge.</p>
	<p>Photo B</p>	<p>First application of edge sealant or edge sealing system. (Only 5 minutes of drying time allowed before reinstatement commenced)</p>
	<p>Photo C</p>	<p>Second application of edge sealant or edge sealing system to top of reinstatement edge following compaction of first reinstatement lift. (Only 2 minutes of drying time allowed before reinstatement commenced).</p>
	<p>Photo D</p>	<p>Core Comments:</p> <ul style="list-style-type: none"> • Core taken through joint shows that the edge sealant or edge sealing system has not adhered to vertical edge; • No bond observed between reinstatement and adjacent surfacing.

Overall Comments

- Reinstatement edge should have been washed and substantially dried before application of spray sealant;
- Allowed drying time does not conform with manufacturer's instructions;
- Incorrect application of edge sealant or edge sealing system could permit water penetration into joint, potentially leading to early life edge deterioration, settlement of trench and future (avoidable) defects.

Table NG6.2

Table NG6.3 Dry and Damp Examples




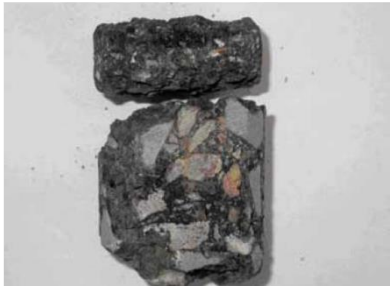
	<p>Photo A</p>	<p>Dry/Damp Edge Conditions Poor Bonding (Weather: light rain) Coating of wet slurry on saw-cut edge.</p>
	<p>Photo B</p>	<p>First application of edge sealant or edge sealing system. (Only 5 minutes of drying time allowed before reinstatement commenced).</p>
	<p>Photo C</p>	<p>Second application of edge sealant or edge sealing system to top of reinstatement edge following compaction of first reinstatement lift. (Only 2 minutes of drying time allowed before reinstatement commenced).</p>
	<p>Photo D</p>	<p>Core Comments:</p> <ul style="list-style-type: none"> • Core taken through joint shows that the edge sealant or edge sealing system has not adhered to vertical edge; • No bond observed between reinstatement and adjacent surfacing.
<p>Overall Comments:</p> <ul style="list-style-type: none"> • Reinstatement edge should have been washed and substantially dried before application of spray sealant; • Allowed drying time does not conform with manufacturer's instructions; • Incorrect application of edge sealant or edge sealing system could permit water penetration into joint, potentially leading to early life edge deterioration, settlement of trench and future (avoidable) defects. 		

Table NG6.3

NG6.6 None

There are no Notes for Guidance for section 6.6

NG7 Rigid and Modular Roads

NG7.1 Reinstatement Methods

NG7.1.1 The requirements of this Specification shall apply to all rigid roads up to 125 msa traffic flow. All rigid roads with existing traffic flows exceeding 30 msa must be identified by the Authority, prior to the commencement of works, so that reinstatement requirements can be agreed.

NG7.1.2 Some modern concrete roads, constructed in accordance with current Government standards and specifications, may incorporate special design philosophies that are beyond the scope of this Specification. Similarly, there may be other existing rigid road designs that will also require the use of particular reinstatement methods. Such roads must also be identified by the Authority, prior to the commencement of works, so that reinstatement requirements can be agreed.

NG7.2 None

There are no Notes for Guidance for section 7.2.

NG7.3 None

There are no Notes for Guidance for section 7.3.

NG7.4 None

There are no Notes for Guidance for section 7.4.

NG7.5 None

There are no Notes for Guidance for section 7.5.

NG7.6 None

There are no Notes for Guidance for section 7.6.

NG7.7 Modular Roads

NG7.7.1 When excavating in modular roads, the existing modules shall be lifted carefully and stored for re-use.

NG7.7.2 It is particularly important to ensure that bedding and jointing sands should meet the performance demands in areas subject to heavy vehicular traffic.

NG7.8 None

There are no Notes for Guidance for section 7.8.

NG8 Footways, Footpaths and Cycle Tracks

NG8.1 None

There are no Notes for Guidance for section 8.1.

NG8.2 Sub-base and Binder Course Reinstatement

NG8.2.1 There are no Notes for Guidance for section 8.2.1.

NG8.2.2 There are no Notes for Guidance for section 8.2.2.

NG8.2.3 There are no Notes for Guidance for section 8.2.3.

NG8.2.4 **Excavations Adjacent to Roads**

NG8.2.4.1 The most heavily stressed area of a road is usually the inside wheel track adjacent to the road edge. Depending on ground conditions, it is often necessary to support the road edge by providing lateral restraint within the adjoining footway, footpath, cycle track or verge. The most common form of edge support is a section of unbound or cement bound granular materials. This construction will most commonly be encountered when the horizontal distance, between the edge of the Undertaker's excavation and the edge of the road surface, is less than the expected depth of cover of the Undertaker's apparatus.

NG8.3 Surface Reinstatement

NG8.3.1 **High Duty and High Amenity Areas**

NG8.3.1.1 In high duty footways, the durability of the surface course is of prime importance and simple cosmetic matching of materials may not be adequate. Specific grades of material such as Caithness stone modules, or specific types of construction such as asphalt sand carpet/mastic, may have been laid in order to give an acceptable performance under extreme

conditions. In these cases, similar or equivalent grades of materials will need to be reinstated.

NG8.3.1.2 In high amenity footways, the cosmetic matching of materials at the surface course may be of primary importance with durability of secondary importance.

NG8.3.2 Areas Surfaced with Asphalt Concrete

NG8.3.2.1 A wide range of surface treatments exist and commonly these are less than 6 mm aggregate size. Where available, a similar surface finish will be reinstated. The surface course material may be reinstated using any of the allowed binder course or surface course materials, with a final surface treatment applied as soon as practicable following the laying of the permanent surface course.

NG8.3.3 Other Asphalt Areas

NG8.3.3.1 Mastic asphalt is sometimes used as a footway surfacing material for its appearance and durability. Where an Authority has a policy of using this material and reinstating with it then it is reasonable to expect the Undertaker to similarly comply with this. However, the cost of small quantities of mastic asphalt is disproportionate to the size of the reinstatement and can result in significant wastage. Consequently it is not unreasonable for an Undertaker to wish to compile a programme of such works to achieve an efficient utilisation of resources. Therefore an Authority should expect such work to be programmed so that sites requiring mastic asphalt are batched to produce a package of work.

NG8.3.4 Areas Constructed In Concrete

NG8.3.4.1 Generally, the use of all flexible permanent reinstatements in overlaid concrete, mastic asphalt, asphalt carpet, sand carpet or other derivative surfaces etc., has proven to be entirely adequate in practice.

NG8.3.5 There are no Notes for Guidance for section 8.3.5.

NG8.3.6 There are no Notes for Guidance for section 8.3.6.

NG8.3.7 There are no Notes for Guidance for section 8.3.7.

NG8.3.8 There are no Notes for Guidance for section 8.3.8.

NG8.4 None

There are no Notes for Guidance for section 8.4.

NG8.5 None

There are no Notes for Guidance for section 8.5.

NG9 Verges and Unmade Ground

There are no Notes for Guidance for section 9.

NG10 Compaction Requirements

NG10.1 Introduction

NG10.1.1 Research has shown that failure to operate and maintain compaction equipment in accordance with manufacturer's schedules and recommended practices is likely to result in inadequate compaction with serious implications for the short term performance of individual structural layers and the long term integrity of the entire reinstatement.

NG10.2 Compaction of Materials

NG10.2.1 Unbound Granular and Cohesive Materials

NG10.2.1.1 For granular or cohesive materials, a vibrating roller may be unsuitable in small excavations because of the restricted manoeuvrability of large heavy rollers required to achieve adequate levels of compaction with an acceptable number of passes.

NG10.2.2 There are no Notes for Guidance for section 10.2.2.

NG10.2.3 Bituminous Materials

NG10.2.3.1 With some combinations of compaction plant and certain types of bituminous materials if compaction is continued as the material approaches its maximum density the following may result:

- a) The migration of fines or binder to the surface.
- b) The development of shear surfaces and or crushing of aggregates.

NG10.2.3.2 Provided that the material has been laid and compacted within the appropriate temperature range, fewer passes will be required when any signs of distress become apparent.

NG10.2.3.3 Asphalt maximum density values, used in the calculation of air voids content, are specific to particular asphalt mixtures incorporating

constituents from specific sources. Any variation in mix proportions or constituents requires the maximum density to be re-established.

NG10.2.3.4 Although consistent asphalt supply may allow an established maximum density for a particular mixture and source to be used for some time in routine situations, the definitive method to be used in the event of dispute will require the maximum density to be determined from the same core samples used to determine bulk density.

NG10.2.3.5 When taking cores near surface apparatus, Section [S10.2.4.4](#) requires a minimum clearance of 300 mm to avoid damaging the apparatus or structure it is bedded on. However, it is possible that some surface apparatus may have wider than normal flanges and there may be instances where a greater clearance is required to avoid damage. If doubt exists, liaison with the owner of the apparatus should be undertaken in advance.

NG10.2.4 There are no Notes for Guidance for section 10.2.4.

NG10.2.5 **Modular Surfacing Materials**

NG10.2.5.1 Depending on the size and type of paving module to be laid, and/or the extent of the area to be surfaced etc., the use of additional mechanical compaction may become necessary.

NG10.3 **Equipment Operation and Restrictions**

Small items of compaction plant will frequently be required and additional provisions must be considered for use in trenches of less than 200 mm width, small excavations and other areas of restricted access. In general, lightweight vibrotampers and poletampers are capable of achieving the same degree of compaction as the heavier items of plant specified in [Appendix A8](#). However, small plant is usually not self-advancing and therefore more difficult to operate effectively.

NG10.3.1 Hand Rammers

NG10.3.1.1 Hand rammers may be used for initial tamping of fine fill material or immediately adjacent to street furniture, reinstatement edges etc.

NG10.3.1.2 In all cases, full machine compaction complying with [Appendix A8](#) will normally be applied immediately after the required thickness of material has been built-up. However, hand ramming alone may be necessary around standpipes and other isolated fixed features.

NG10.3.2 Percussive Rammer

NG10.3.2.1 A percussive rammer is deemed to be a hand-held and/or pedestrian guided machine in which an electric, pneumatic or hydraulically operated reciprocating mechanism acts on a plate or 'foot'.

NG10.3.2.2 Percussive rammers may only be used to provide full machine compaction in areas where restricted access prevents the effective use of conventional compaction equipment.

NG10.3.3 Vibrotamper

NG10.3.3.1 A vibrotamper is deemed to be a free-standing, pedestrian guided machine in which a reciprocating mechanism, driven by an integral engine or motor, acts on a spring system through which oscillations are set up in a base plate or 'foot'.

NG10.3.3.2 Vibrotampers may be operated at reduced speed, for the first pass only, with cohesive materials.

NG10.3.3.3 Vibrotampers are not preferred for any permanent surface course application or any other application involving a layer thickness of less than 50 mm.

NG10.3.4 Vibrating Roller

NG10.3.4.1 A vibrating roller is deemed to be a self-propelled, operative steered machine with a means of applying mechanical vibration to one or more drums.

NG10.3.4.2 Vibrating rollers should be operated in the lowest available gear, except for the first pass, which should be at maximum forward speed.

NG10.3.4.3 All compaction passes should be carried out with full vibration, except for the first pass, which should be carried out without vibration in order to nip in the material adjacent to the reinstatement edges and to prevent uneven displacement of material within the remainder of the reinstatement area.

NG10.3.4.4 Vibrating rollers are the preferred method of compaction for all permanent surface courses.

NG10.3.4.5 The use of twin drum rollers is preferred to single drum for the compaction of bituminous mixtures and will improve the quality of the permanent surface course. However, single drum vibrating rollers are permitted, as detailed in [Appendix A8](#).

NG10.3.5 Vibrating Plate Compactor

NG10.3.5.1 A vibrating plate compactor is deemed to be a pedestrian guided plate equipped with a source of vibration consisting of one or more rotating, eccentrically weighted shafts.

NG10.3.5.2 Vibrating plate compactors should be operated in the lowest available gear, except for the first pass, which should be at maximum forward speed.

NG10.3.6 Other Compaction Equipment

NG10.3.6.1 Compaction plant not referenced in [Appendix A8](#), including machine-mounted, modified and other alternative compaction equipment, may be

permitted for the compaction of reinstatement materials, in accordance with the following relevant requirements:

a) Machine-Mounted Compactors

A machine-mounted compactor is deemed to be any compaction equipment that is mounted, as an attachment or accessory, to the chassis or front or rear booms of an excavator, tractor, skid-steer vehicle or other proprietary vehicle, for the purposes of compaction.

All machine-mounted compactors, whether integral to the vehicle design or special attachments for front or rear mounting to the chassis or booms of any excavator, tractor or skid-steer vehicle etc. should be operated in accordance with the recommendations of the compactor or attachment manufacturer, to the relevant compaction procedure required by [Appendix A8](#). However, other operational variables should also be considered prior to the operation of such plant as follows:

i) Compactor Downforce

The total downforce will vary depending upon the weight of the vehicle chassis or compactor frame, and any additional downforce applied by hydraulic rams etc. However, changes in the configuration of any vehicle, by the addition or removal of other accessories etc., changes in the width of the vibrating foot, roll or plate etc., movement of any boom resulting in a significant change of loading geometry or outreach etc., attaching of the compactor to other vehicles of differing types or weights etc., can all result in a significant reduction of compactive performance that is seldom apparent. All operators should be aware of the potential reduction in compactive performance resulting from such changes in configuration.

ii) Applied Downforce

The mounting of compaction equipment to the front loader arms of an excavator, where the downforce is sensibly limited by the lifting of the front wheels, is preferred. All compactors mounted to the backhoe of an excavator should be fitted with a downforce-limiting device, correctly set, or with a simple indicating device allowing the amplitude to be estimated.

iii) Compactor Set-up

Where vibration frequency or amplitude, or any other parameter affecting the dynamic output of a compactor, is expected to be adjusted on a routine basis, all parameters should be set in accordance with the manufacturer's recommendations unless specific testing, meeting the requirements of Section [NG1.6.4](#), has shown other settings to be at least as effective.

b) Modified Compaction Equipment

Modified compaction equipment shall include any proprietary vibrotamper, vibrating roller, vibrating plate compactor, percussive rammer or other compaction plant which has been adapted, converted, revised or otherwise changed from the original manufacturer's Specification, resulting in a significant change to the original configuration, dimensions, operational weight or power output.

Modified compaction equipment shall be permitted, provided it is operated in accordance with compaction procedures meeting the following requirements:

- i) The original manufacturer shall provide written confirmation that the modified compaction equipment, operated in accordance with the original compaction procedure, is capable of achieving the same degree of compaction as any other option permitted in [Appendix A8](#); or

ii) A revised compaction procedure is developed in accordance with the requirements of Section [NG1.6](#).

c) Alternative Compaction Equipment

Alternative compaction equipment shall include all other compaction devices not specifically permitted within Section [NG10.3](#). Alternative compaction equipment may be permitted, provided it is operated in accordance with compaction procedures developed in accordance with the requirements of Section [NG1.6.4](#).

NG11 Ancillary Activities

NG11.1 Traffic Signs, Road Markings, Studs and Verge Markers

NG11.1.1 General

NG11.1.1.1 The replacement of traffic signs, road markings, studs and verge markers whether temporary or permanent immediately following completion of the works, is done in the interest of road safety and particularly in the interests of people with disabilities.

NG11.1.1.2 Also in the interests of safety where the replacement of high friction surfaces has been delayed please refer to [S6.4.7.2 b\)](#) in respects of temporary warning signs.

NG11.1.2 There are no Notes for Guidance for section 11.1.2.

NG11.1.3 Road Markings – General

NG11.1.3.1 Cold applied road markings (e.g. Methylmethacrylate) are often laid thinner than thermoplastic materials and may require longer setting or curing times. Different glass beads and other surface treatments, e.g. for skid resistance, may need to be applied to these materials. Guidance on this shall be sought from the manufacturer of the material and this guidance must be followed.

NG11.1.4 There are no Notes for Guidance for section 11.1.4.

NG11.2 Street Furniture and Special Features

NG11.2.1 In the interests of safety generally, and particularly in the interests of the disabled, all street furniture, tactile paving and any other special features removed during the course of works should be replaced immediately following the completion of works.

NG11.3 Traffic Sensors etc.

NG11.3.1 Examples of sensors include ice warning sensors, buried queue and traffic detectors, other electronic detectors and various data collection devices.

NG11.3.2 The replacement of some traffic sensors may require the use of specialist contractors.

NG11.4 Water-related Matters

NG11.4.1 There are no Notes for Guidance for section 11.4.1.

NG11.4.2 Water Egress (Road Surface and Utility Apparatus)

NG11.4.2.1 If water issues from the road surface or an Undertaker's apparatus, the Authority shall initiate an investigatory works procedure to determine the cause and source of the water egress. Prior to commencement of the investigatory work, the Authority should contact any Undertaker or Undertakers which it believes may be responsible for the egress of water. Undertakers shall cooperate with the Authority in its investigation and may take trial holes and check apparatus for water leakage or surcharge through the apparatus, ducts and surround to the apparatus.

NG11.4.2.2 If following the investigation, the Authority has reasonable cause to believe that water egress is caused or associated with the Undertaker's apparatus; remedial measures shall be agreed between the Authority and the Undertaker and shall be at the Undertaker's cost. In the absence of agreement between the Authority and the Undertaker, liability for any damage shall be determined in accordance with section 141 of the Act (Liability for any damage or loss caused).

NG11.5 Ironwork and Apparatus

NG11.5.1 Access Covers, Frames and Surround

- a) The access surround is a critical feature because of the load transfer and point loads impacting on the fixed feature and as a potential point of weakness. It is therefore important that the surround is constructed to adequately withstand and transfer the applied loads.
- b) The sub-structure of an underground chamber supporting an access cover and frame is constructed in such a way that it is not usually possible to achieve a full depth reinstatement in the area defined as the 'access surround'. The access surround is the width between the fixed feature (access frame) and the point at which a full depth reinstatement can be achieved with a full load transfer. The 'access surround' width will vary depending on the size of the access frame and cover.
- c) The access surround should be of sufficient width to enable adequate compaction if constructed in an asphaltic material or a flowable material.

NG11.5.1.1 There are no Notes for Guidance for section 11.5.1.1.

NG11.5.1.2 There are no Notes for Guidance for section 11.5.1.2.

NG11.5.1.3 Reinstatement Materials

- a) Apparatus bedding materials should be compliant with the current version of HA104 and used in accordance with its requirements.
- b) If the bedding material depth is greater than the manufacturers recommendations, an appropriate product should be used to infill this gap, e.g. C32/40 strength concrete.

NG11.6 None

There are no Notes for Guidance for section 11.6.

NG11.7 Overbanding

NG11.7.1 Research by TRL has indicated overbanding may provide some benefits in terms of long-term performance of the reinstatement. However, poorly applied overbanding can pose a significant risk in terms of poor resistance to skidding especially for two wheeled vehicles and horses. It is therefore recommended that site-specific risk assessments should be documented by the Undertaker before any use of overbanding on potentially high risk sites as defined in Section [S2.6.3](#).

NG12 Remedial Works

There are no Notes for Guidance for section 12

NGA1 Backfill Materials

There are no Notes for Guidance for this Appendix

NGA2 Key to Materials

NGA2.1 Introduction

NGA2.1.1 For guidance on the terminology for asphalt mixtures refer to PD6691.

NGA2.2 Hot Rolled Asphalt (HRA) Mixtures

NGA2.2.1 HRA design mixtures give better resistance to deformation where queuing of heavy traffic is likely to occur and may also be more economical to lay.

NGA2.2.2 Type C mixtures use fine aggregate of a coarser grading than Type F mixtures – usually associated with the use of crushed rock fines. Such mixtures tend to be stiffer and are less well suited to the reinstatement of small excavations.

NGA2.3 Stone Mastic Asphalt (SMA) Mixtures

NGA2.3.1 General

NGA2.3.1.1 SMA is a high stone content, gap graded material which has the voids between aggregate particles essentially filled with a bitumen-rich mortar.

NGA2.3.1.2 SMAs are very rich in bitumen to the extent that measures have to be taken to prevent bitumen from 'draining' from the mix during transport. Most commonly bitumen drainage is prevented by addition of either polymer modifiers or cellulose fibre.

NGA2.3.1.3 True SMA is intended to be virtually impermeable and has very good resistance to deformation by virtue of its 'stone to stone' skeleton. The level of texture depth achieved is largely a function of the material design, texture depth achieved is therefore likely to be more consistent than with HRA, where the application rate and the embedment of the surface applied coated chippings is critical.

NGA2.3.2 Specification

NGA2.3.2.1 There is a European Standard for SMAs, BS EN 13108-5 and, in the UK, Published Document PD6691 “Guidance on the use of BS EN 13108 Bituminous mixtures – Material specifications”.

NGA2.3.2.2 There are also a number of proprietary mixes that fit the generic description of an SMA.

NGA2.3.2.3 Product Acceptance Scheme approved thin surface course systems may also comply with the RAUC(S) requirements but there is no guarantee. Some Product Acceptance Scheme materials can have void contents in excess of that permitted in this Specification. Purchasers should make it clear to suppliers that the work has to comply with the air void specification.

NGA2.3.3 Transport

NGA2.3.3.1 As with all asphalt materials it is important that temperature loss is minimised during transport, handling and storage to allow effective placement and compaction. The high bitumen content of mixtures means that provided material temperatures remain elevated then compaction is relatively easy.

NGA2.3.3.2 Transporting should comply with the requirements of this Specification and BS 594987.

NGA2.3.3.3 To minimise the risk of segregation and temperature loss it is preferable to use the material direct from the delivery vehicle or hot box. Material should never be tipped on to adjacent surfaces for use sometime later.

NGA2.3.4 Preparation

NGA2.3.4.1 Preparation should comply with this Specification and BS 594987. A polymer-modified bond coat is preferable when using SMA.

NGA2.3.5 Laying

NGA2.3.5.1 Placement of the SMA should be done in such a way as to avoid segregation of the mix. Where possible this is to be accomplished by careful use of a shovel. The use of a rake is to be avoided. Care must be taken with the use of some “hot boxes” as these can also cause segregation of mixes through the discharge augers.

NGA2.3.5.2 Areas showing segregation should be removed as these are not acceptable at any time.

NGA2.3.5.3 Where initial skid resistance of >40 SRV is required (all carriageway applications) or in areas where equestrian usage is likely the material should be gritted using a clean, dry, crushed quartzite or similar very hard angular aggregate to a grading similar to that shown in [Table NGA2.1](#) or 3 mm steel slag shall be applied evenly to the surface during the initial rolling, i.e. whilst the material is still warm. The rate of application shall be to provide about 80% surface coverage (approximately 1000 grammes per square metre). Where the authority uses a lightly coated grit for the treatment of SMA this may also be suitable.

Table NGA2.1 Recommended Aggregate Grading for Gritting SMA Surfaces	
BS test sieve	% passing
6.3 mm	100
5.0 mm	95 - 100
3.35 mm	66 - 90
1.18 mm	0 - 20
600 µm	0 - 8
75 µm	0 - 1.5

Table NGA2.1

NGA2.3.5.4 After the final rolling all surplus aggregate should be removed before the reinstatement is opened to traffic.

NGA2.3.5.5 It is important to take care that the application of grit should not reduce compliance with any texture depth requirement.

NGA2.3.6 Compaction

NGA2.3.6.1 Compaction of the material is best carried out using a smooth wheeled roller. Vibration may be applied provided that this does not bring about excessive movement of the bitumen to the surface of the layer, i.e. “bleeding”. On narrow reinstatements compaction equipment in accordance with [Table NGA8.1](#)

NGA2.3.6.2 may be used but care must be taken to ensure that there is no excessive loss of surface texture or bleeding.

NGA2.4 Not Used

There are no Notes for Guidance for Appendix 2.4.

NGA2.5 Not Used

There are no Notes for Guidance for Appendix 2.5.

NGA2.6 Not Used

There are no Notes for Guidance for Appendix 2.6.

NGA2.7 Not Used

There are no Notes for Guidance for Appendix 2.7.

NGA2.8 Not Used

There are no Notes for Guidance for Appendix 2.8.

NGA2.9 Not Used

There are no Notes for Guidance for Appendix 2.9.

NGA2.10 Not Used

There are no Notes for Guidance for Appendix 2.10.

NGA2.11 Not Used

There are no Notes for Guidance for Appendix 2.11.

NGA2.12 Not Used

There are no Notes for Guidance for Appendix 2.12.

NGA3 Not Used

There are no Notes for Guidance for Appendix 3.

NGA4 Not Used

There are no Notes for Guidance for Appendix 4.

NGA5 Not Used

There are no Notes for Guidance for Appendix 5.

NGA6 Not Used

There are no Notes for Guidance for Appendix 6.

NGA7 Not Used

There are no Notes for Guidance for Appendix 7.

NGA8 Compaction Requirements

NGA8.1 Not Used

There are no Notes for Guidance for Appendix 8.1.

NGA8.2 Not Used

There are no Notes for Guidance for Appendix 8.2.

NGA8.3 Bituminous Mixtures

NGA8.3.1 [Table NGA8.1](#) provides guidance for compaction procedures that may be capable of achieving the specified air voids values.

Table NGA8.1 Compaction requirements for Bituminous Mixtures

Compaction Plant and Weight Category	Bituminous Mixtures Minimum Passes/Lift for compacted lift thickness up to			
	40 mm	60 mm	80 mm	100 mm
Vibrotamper 50 kg minimum	5 #	7 #	NR	NR
Vibrating Roller Single Drum 600-1000 kg/m	10	12	NR	NR
1000-2000 kg/m	6	10	NR	NR
2000-3500 kg/m	5	7	8	NR
Over 3500 kg/m	4	6	7	NR
Twin Drum 600-1000 kg/m	5	7	NR	NR
1000-2000 kg/m	4	5	6	8
Over 2000 kg/m	3	4	4	6
Vibrating Plate 1400-1800 kg/m ²	6	NR	NR	NR
Over 1800 kg/m ²	3	5	6	8
All Above Plant	For Maximum and Minimum compacted lift thickness See Appendix A2.8 , Table A2.1			
Alternative Compaction Plant for Areas of Restricted Access (including small excavations and trenches less than 200 mm width)				
Vibrotamper 25 kg minimum	Minimum of 6 compaction passes Maximum of 75 mm compacted lift thickness			
Percussive Rammer 10 kg minimum				

Table NGA8.1

Notes

NR = Not Recommended

Vibrotamper not recommended on permanent surface course of trenches > 500 mm width

Twin drum vibrating rollers are preferred for compaction of bituminous mixtures

Single drum vibrating rollers are vibrating rollers providing vibration on only one drum

Twin drum vibrating rollers are vibrating rollers providing vibration on two separate drums

NGA9 Alternative Reinstatement Materials (ARMs)

NGA9.1 General

NGA9.1.1 Alternative Reinstatement Materials, particularly slow cure Hydraulically Bound Mixtures, may not achieve their full design strength for some time after placement. It is therefore recommended that Structural Materials for Reinstatement, used as sub-base or base, should achieve a minimum Immediate Bearing Index (CBR without surcharge) of 30 prior to overlaying or trafficking.

NGA10 Not Used

There are no Notes for Guidance for Appendix 10.

NGA11 Not Used

There are no Notes for Guidance for Appendix 11.

NGA12 Reinstatement of Modular Surface Layers

NGA12.1 General

NGA12.1.1 Modules with sides generally up to and including 300 mm rely on jointing sand between the vertical faces of the modules, normally affected through vibration methods, with jointing sand subsequently brushed into joints upon completion. It is essential that the jointing sand is kiln dried and free flowing. Sharp sand or building sand are not normally deemed to meet these requirements, although in some situations the use of sharp sand has been found to provide increased durability.

NGA12.1.2 It should be noted that there may be a need to revisit sites to top up jointing sand following subsequent trafficking.

NGA12.1.3 It should also be noted that there may be a need for the application of a sealant on sites subject to mechanical/vacuum sweeping.

NGA12.2 Examples of Cement or Concrete Infills

NGA12.2.1.1 Figure NGA12.1 to Figure NGA12.3 provide guidance as to acceptable treatment of cement or concrete infills between the nearest practical module and the immediately adjacent fixed feature or boundary feature, as described in [Appendix A12](#). [Figure NGA12.1](#) and [Figure NGA12.2](#) show fillets in modules of one side greater than 300 mm, whilst [Figure NGA12.3](#) shows fillets in modules with sides up to and including 300 mm.

NGA12.3 Examples of Reinstatement of Modular Patterns

NGA12.3.1 [Figure NGA12.4](#), [Figure NGA12.5](#) and [Figure NGA12.6](#) provide guidance as to acceptable treatment of modular patterns in localised reinstatements immediately adjacent to fixed features or boundary features. The principle of an acceptable loss of local pattern is indicated,

together with the use of larger cut and/or shaped pavers, both leading to an improved aesthetic and structural arrangement of the modules within the reinstatement.

Figure NGA12.1 Extension of Infill Concrete – Modules greater than 300 mm [Picture 1]


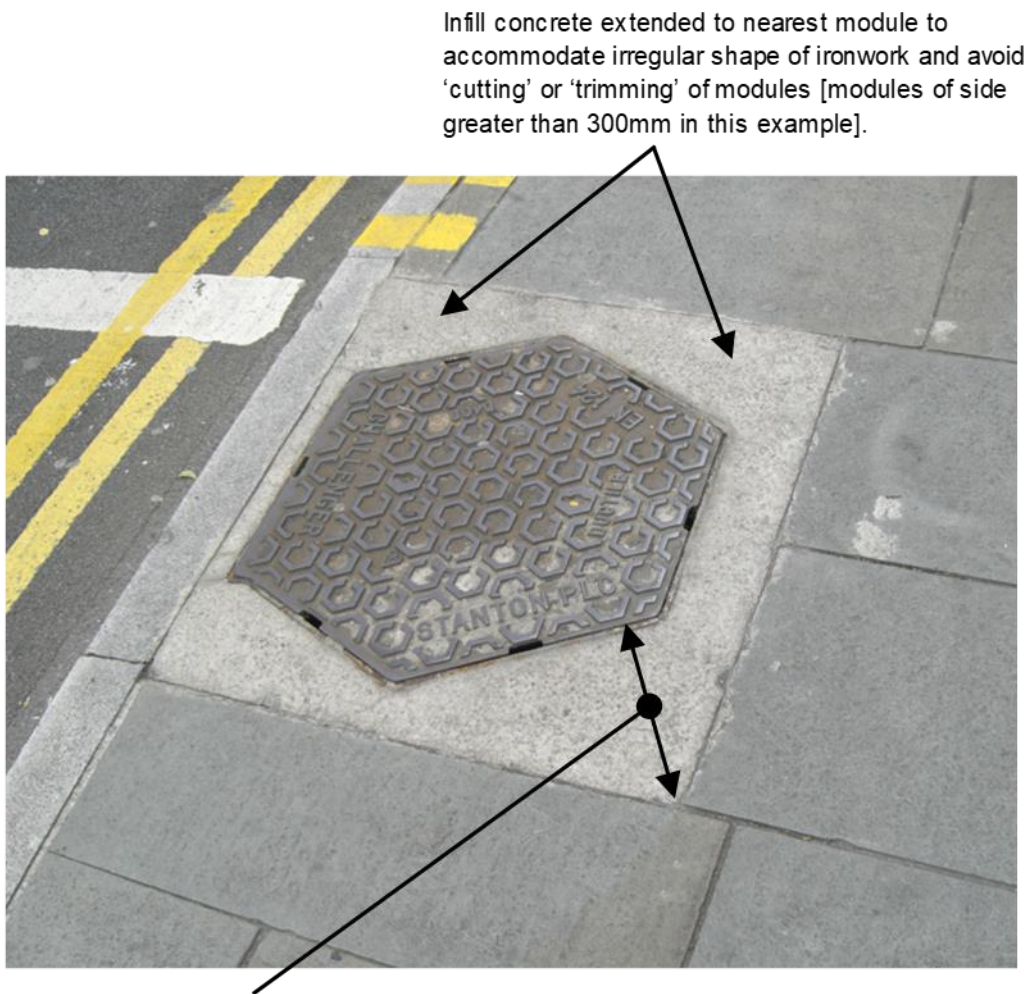


Figure NGA12.1

Figure NGA12.2 Extension of Infill Concrete – Modules greater than 300 mm [Picture 2]

Infill concrete extended to nearest module to accommodate irregular shape (and orientation) of ironwork therefore limiting 'cutting' or 'trimming' of modules to approximately half-size [modules of side greater than 300mm in this example].

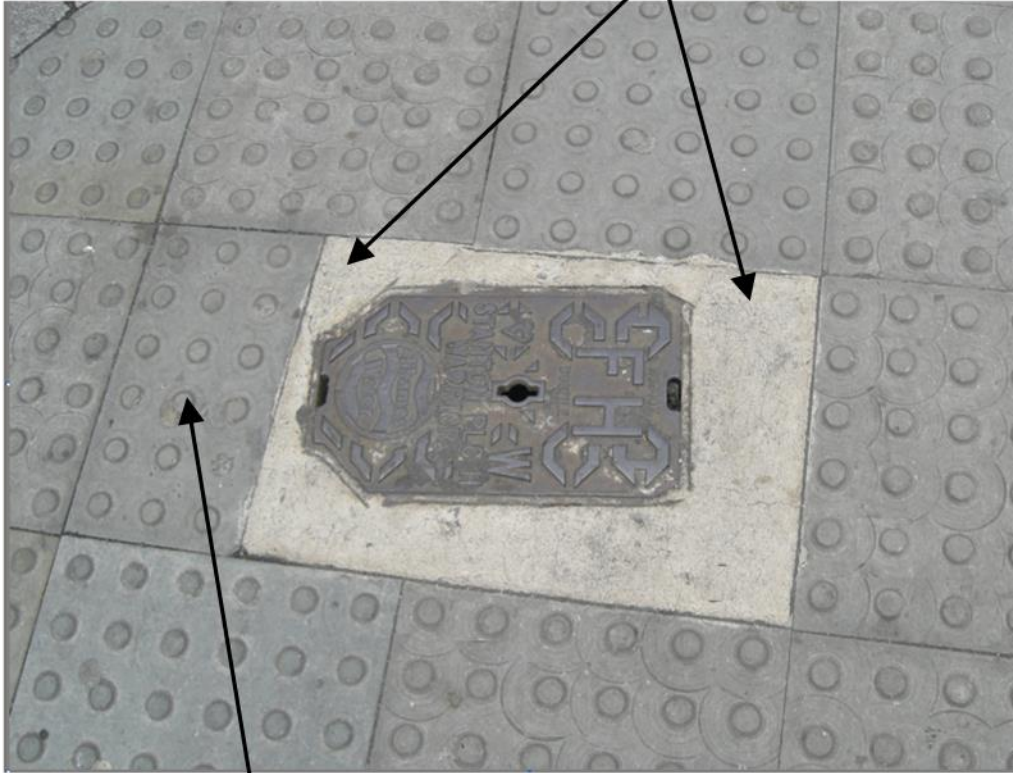


Use of varying width of infill limits 'cutting' or 'trimming' of existing surround modules (half-size in this example)

Figure NGA12.2

Figure NGA12.3 Extension of Infill Concrete – Modules up to 300 mm

Use of varying width concrete to form an 'external' regular boundary shape (rectangular) with existing modules avoids 'cutting' or 'trimming' of existing surround modules

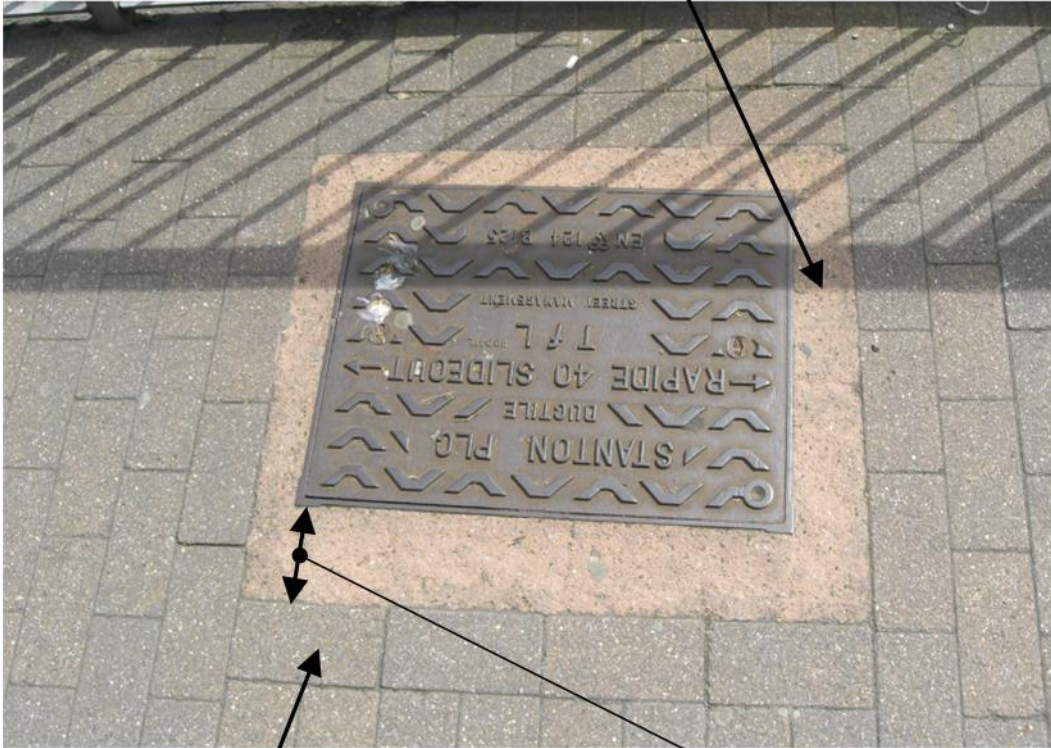

Infill concrete extended to nearest appropriate (full) module to accommodate orientation of ironwork and avoid 'cutting' or 'trimming' of modules to undesirably small sizes [modules of side up to 300mm in this example].

Maximum width of infill measured at right angles to ironwork face up to module width + 25mm

Figure NGA12.3

Figure NGA12.4 Acceptable Loss of Module Pattern – Modules up to 300 mm [Picture 1]

Use of cut 'half blocks (100mm x 100mm) minimises apparent loss of local module/paver pattern (herringbone in this example)



Use of larger cut/shaped blocks leads to acceptable loss of local pattern (herringbone in this example). This is preferred to small and/or angular cut blocks otherwise necessary to maintain regularity of existing block paver pattern.

Figure NGA12.4

Figure NGA12.5 Acceptable Loss of Module Pattern – Modules up to 300 mm [Picture 2]

Use of grouped larger cut/shaped blocks leads to acceptable loss of local pattern (herringbone in this example). This is preferred to small and/or angular cut blocks otherwise necessary to maintain regularity of existing block paver pattern




Use of larger cut and/or shaped blocks leads to preferable arrangement of block pavers at corner to stringer course.

Figure NGA12.5

Figure NGA12.6 Acceptable Loss of Module Pattern – Modules up to 300 mm [Picture 3]

Use of cut 'half blocks (100mm x 100mm) minimises apparent loss of local pattern (herringbone in this example)

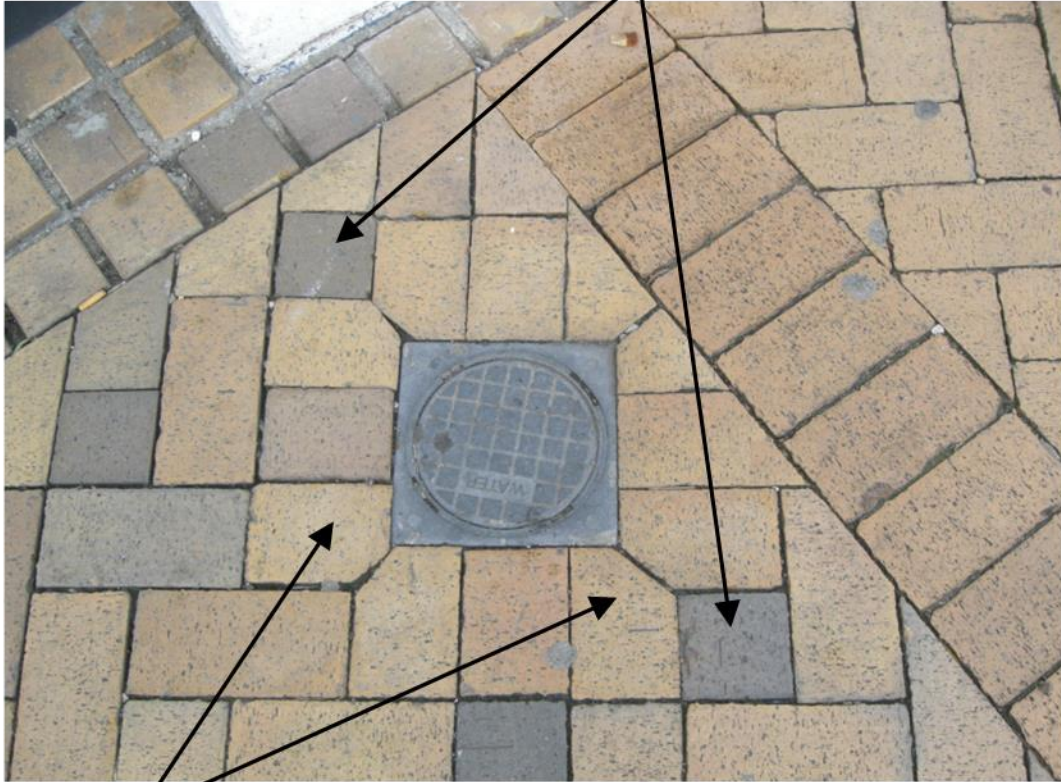

Use of larger cut and/or shaped blocks leads to preferable arrangement of block pavers as surround to small Stop-Cock type apparatus.

Figure NGA12.6

NGA12.4 Provision of Replacement Modules

NGA12.4.1 It is in both Authorities and Undertakers interest to achieve a reinstatement that matches the existing modules as closely as possible. Authorities are recommended to retain stocks of modules used within their areas to enable them to provide replacements when modules are required due to breakage at some time prior to the Undertaker's works. The Authority may provide such suitable replacements to the Undertaker, free of charge.

NGA12.4.2 Where no stocks of suitable replacements are available, Authorities should assist Undertakers in locating a source of suitable replacement modules. This is becoming especially prevalent with the proliferation of modules sourced from around the world. When obtaining a supply from the original source is uneconomic, Authorities should accept similar modules from an alternate source of supply.

